

Boston Electronics Corporation

91 Boylston Street, Brookline, Massachusetts 02445 USA

(800)347-5445 or (617)566-3821 fax (617)731-0935

www.boselec.com Heimann@boselec.com

HEIMANN Sensor

Thermopiles for **TEMPERATURE**

and *Gas* Sensing

Including new **DIGITAL** output detectors &
with **OPERATING TEMP TO 180°C**





Boston Electronics Corporation

91 Boylston St, Brookline MA 02445 USA

(800)347-5445 or (617)566-3821

fax (617)731-0935 * boselec@boselec.com

Heimann Thermopiles - how to select

Need to decide on **ACTIVE AREA, NUMBER OF ELEMENTS, PACKAGE, AND FILTER/WINDOW.**
OPTIONALLY add **AMPLIFICATION** (inside package or outside) and **OPTICS** (lens, mirror)

| Active Area | | 4 standard active areas are available. | | | |
|--|------------------------------------|--|---|-------------------------------------|-------------|
| Chips | CODE >> | 1 | 2 | 3 | 1C |
| | AREA mm ² (rectangular) | 0.61x0.61 | 1.2x1.2 | 2.1x2.1 | 0.85x0.85 |
| | | small, low cost | large, high signal | largest, higher signal, higher cost | midsize |
| | | used for temp sensing usually | used for gas sensing usually | used for gas sensing usually | temp or gas |
| Active area = area of highest absorption. Heimann's main advantage over competitors is small thermal time constant. The heat capacity of Heimann elements is small, which makes them fast. | | | | | |
| Number of elements | | single, dual and quad are standard. 3x3, 1x8 and 1x16 available as engineering samples | | | |
| Thermistors | | CODE: second digit | n 1 = 100 kOhm thermistor; n 2 = 30 kOhm thermistor | | |

| Spectral Response | | A variety of filters are stocked | | |
|---|--|----------------------------------|------------------------------|--------------------------------|
| Filters are chosen depending on the application | | | | |
| Filters | Application | Filter | | |
| | Temp measurement, short distance to target | 5.5 micron LWP | | |
| | Temp measurement, when distance to target makes atmospheric absorption significant | 8 to 14 micron BP | | |
| | Gas sensing | Gas | filter ctr w/HPBW (standard) | Also Available |
| | | CO2 | 4.26/0.18 or 0.09 | 4.43/0.06 (band edge) |
| | | CO | 4.64/0.18 | and per customer specification |
| | | HC | 3.4/0.19 | |
| | | Reference | 3.91/0.09 | |
| others | customer specified | | | |
| uncoated windows | uncoated Si, CaF, sapphire - yet might not always be in stock for all window sizes | | | |

| Sensor Packages | | | | |
|-----------------|-----|-------|--------------------|--|
| Packages | | Code | Type | Comment |
| | HTS | A | TO-5 (TO-39) | 2.5 mm dia aperture |
| | HTS | B | | 3.8 mm dia aperture |
| | HTS | C | | 3.5x3.5 mm aperture; not encouraged |
| | HTS | D | | customized product |
| | HTS | I | | internal FOV aperture |
| | HTS | E | | Dual aperture |
| | HTS | Q | | Quad aperture |
| | HMS | M | TO-18 (TO-46) | with lens f=3mm |
| | HMS | J / K | TO-18 (TO-46) Mini | J with tab, K no tab, "1" or "1C" or 2 chip only |
| | HMS | Z | Baby | no tab, "1" chip only |

| Sensor Modules with electronics | | customers can get the timing and protocol requirements for re-programming | | |
|---------------------------------|---|--|---|---|
| Electronics | | Code | | |
| | HTIA (typical application is temp measurement) | PCB type with chip-on-board , TO39 cap | Analog single channel ASIC with EEPROM adjusted to customer requirements | |
| | | B | external mirror optics | |
| | | C | cap aperture 2.5mm dia , filter type typ. F5.5 | |
| | | D | internal mirror optics , typ. F5.5 | |
| | | E | lens optics focal length 4.4mm, typ. F5.5 | |
| | HIS 6PIN (typical application is temp of gas measurement) | TO39 housing | | Single channel ASIC with EEPROM adjusted to customer requirements |
| | | C | cap aperture 2.5mm dia , filter type typ. F5.5 | |
| | | E | lens optics focal length 3mm or 4.4mm | |
| | HIS 4PIN (typical application is gas measurement) | TO39 housing | | Single channel ASIC with EEPROM max. amplification pref. for gas detection |
| | A | cap aperture 2.5mm dia , filter type typically gas , typically chip type 2 | | |



Infrared Measurement

Application Notes

Every object emits electromagnetic radiation, which wavelength spectrum is dependent on its temperature. For an object without “color”, which means that no wavelength is selectively emitted or absorbed, the radiation spectrum is completely determined by the temperature alone. In this case, the total radiation power P_{obj} emitted by an object of temperature T_{obj} can be expressed as

$$P_{obj} = \sigma \cdot \epsilon \cdot (T_{obj})^4$$

with σ being the Stefan-Boltzmann constant and ϵ the so-called emission factor (or emissivity) of the object. In the ideal case ϵ has the value 1 (black body). For many substances the emission factor lies in the range between 0.85 to 0.95. The above equation is called the Stefan-Boltzmann law. It integrates the total quantity of radiation over all wavelength.

The *net* power P_{rad} received by the thermopile is related to the object temperature T_{obj} and to the temperature of the thermopile chip itself. This value is generally referred as T_{amb} , the ambient temperature.

Therefore the total heat power P_{rad} received from the object at temperature T_{obj} is given to

$$P_{rad} = K \cdot (\epsilon_{obj} \cdot T_{obj}^4 - \epsilon_{abs} \cdot T_{amb}^4)$$

The empirical factor K is a constant device factor.

The thermopile sensor delivers an output signal proportional to the heat flux. The heat balance equation is the basis of any quantitative temperature measurement ($S \rightarrow$ voltage sensitivity).

$$U_{TP} = S \cdot P_{rad} = S \cdot K \cdot (\epsilon_{obj} \cdot T_{obj}^4 - \epsilon_{abs} \cdot T_{amb}^4)$$

It describes that the output voltage is a function of the object and the ambient temperature. For a fixed ambient, the theoretical output voltage of the thermopile chip is proportional to T_{obj}^4 . The T^4 -dependence is only valid, if the sensor senses the whole electromagnetic spectrum with the same sensitivity.

Since in all practical situations the thermopile sensor never senses over all wavelengths with the same sensitivity, the pure T^4 -dependence will rarely be seen. The real dependency can be better described by a polynomial regression of many polynomial factors and coefficients.

The output voltage also varies with the ambient temperature. Any IR temperature measurement system needs therefore to compensate this effect.

There are two possible ways to realize the ambient temperature compensation of the output signal. The analog way by employing an analog circuit. The circuit is designed in a way, that a voltage is generated, which matches exactly the loss or gain in output voltage due to any ambient temperature change.

For high accuracy applications a digital (numerical) calculation method is needed. In this case, the two signals, thermopile voltage and temperature reference signal are derived separately and fed into a microcontroller system, where the necessary calculations are made. The ambient temperature compensation can be performed using look-up tables or polynomial regression equations as a function of the ambient temperature, thermopile output and as result the object temperature. The calculation is related to a defined emissivity. The emissivity variation can be considered by a factor.

APPLICATION NOTE - NDIR Gas detection

Molecules like CO₂, CO, CH₄, NO, N₂O and many others show strong absorption lines in the mid IR region. The absorption of infrared radiation causes transitions between the vibrational-rotational energy levels of the molecule. The typical structure of such an absorption line can be seen in the calculated CO₂ spectrum of figure 1.

An NDIR (non-dispersive infrared) gas measurement set-up consists of an infrared radiation source, a gas sample cell including optical components, a gas specific filter which transmits only radiation corresponding to an absorption band or line of the gas in question and a suitable infrared sensor to detect this radiation.

The gas absorption is similar to a light barrier. If there is none of the specific gas between source and detector the measured signal remains stable and high. If gas molecules of the specific gas passes the area between source and detector the signal drops proportional to the gas concentration. The transmitted intensity is described by the law of Lambert and Beer, where I_0 is the initial intensity, k is the gas specific absorption coefficient, c is the gas concentration and l is the length of the absorption path.

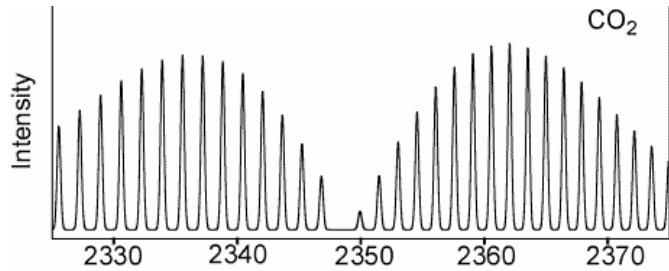


Fig.1: Calculated CO₂ absorption spectrum (4,30 μm – 4,21 μm)

$$I = I_0 \cdot e^{-k \cdot c \cdot l} \tag{1}$$

The infrared source can be a simple infrared lamp, a blackbody radiation source or an infrared diode-laser. The choice depends on the spectral characteristics and costs of the source in relation to the necessary resolution and sensitivity of the gas measurement.

The gas cell can be a single path cell of length l with reflective walls and additional optical components to concentrate the source radiation into the cell. Another possibility is a “White-cell” where the path length is increased by folding the rays with different mirrors or a multipass cell with an even higher number of reflections, increasing absorption due to the longer path length.

The infrared filter and filter specification (CWL = center wavelength at normal incidence, FWHM = full width at half maximum) are important parameters of the gas measurement set-up. In most of the cases this filter is integrated as window into the infrared sensor, making the sensor a gas specific sensor.

If filters are used at other than normal angle of incidence the shift in spectral characteristics has to be considered. All interference filters will shift to shorter wavelength as the angle of incidence deviates from normal. The effect can be approximately calculated by the following formula with n being the index of refraction.[3]

$$\lambda_{\Theta} = \lambda_0 \cdot \frac{\sqrt{n^2 - \sin^2 \Theta}}{n} \tag{2}$$

With increasing temperature the interference filter transmission will shift to longer wavelength and with decreasing temperature to shorter wavelength. The temperature effect can be approximated by the following formula and is normally small (0.01-0.2nm/°C). [3]

$$\lambda_r = \lambda_0 + \Delta T \cdot \frac{\Delta \lambda}{1^\circ \text{C}} \tag{3}$$

Thermopile infrared sensors create a voltage signal proportional to the received radiation. In addition, the signal voltage depends on the sensors own temperature. Equation 4 describes the basic function. T_{source} is the source or object temperature, T_{amb} the ambient or sensor temperature, K an apparatus constant and the exponent n depends on the actual filter characteristics ($n=4$ for a perfect “black” characteristic and unlimited wavelength range).

$$U \approx K \cdot (T_{\text{source}}^n - T_{\text{amb=sensor}}^n) \tag{4}$$

There are different NDIR methods used in practical applications. The two most important are single beam – single wavelength and single beam-dual wavelength. Figure 2 shows the schematic arrangements.

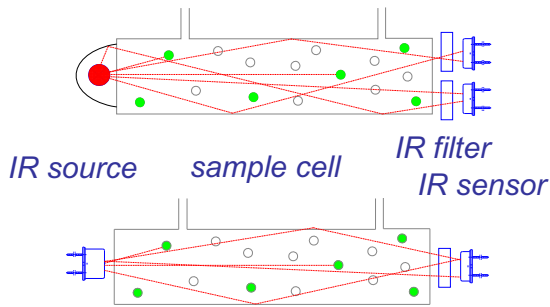


Fig 2: Schematic NDIR set-ups

Heimann normally supplies thermopiles with the filter built into the package cap as its window. In the dual wavelength set-up at top the spectral reference channel is normally well outside of the gas absorption wavelength, therefore the ratio of the two signals will be proportional to the gas concentration but independent of source variations or aging effects. In order to match the two wavelength channels further, the two sensor chips and two filters can be integrated together in one sensor housing. An example for such a dual channel infrared sensor is the Heimann Sensor HTS E21 F4.0/4.26 where “E” denotes the sensor type, “2” the sensor chip size, “1” a thermistor reference of 100kΩ and the two numbers following the letter F give the center

wavelength of the the two gas filters. Up to 4 gas filters and 4 thermopiles are available in stahdard Heimann packages.

Anther approach to increasing sensor stability and ease of application for our customers is to integrate a sensor chip with an matched preamplifier in the form of an ASIC into the same TO housing. The Heimann ASIC has been specially developed to match the sensor chip parameters. The thermopile sensor acts as a voltage source with an internal resistance of about 85kΩ when the contact points of the thermoelements are heated by absorbed radiation energy. In a position close to this voltage source the sensor signal is then amplified to a level of several Volts. Of course the ASIC can be combined with different thermopile chip sizes and the TO39 header can be welded to different filter caps. In addition, the ASIC carries a temperature reference that delivers a linear output signal, e.g. 15mV/°C, for the ambient temperature. The voltage of this temperature reference and the radiation signal can be combined on chip to create a net output signal independent from ambient temperature. Table 1 summarizes typical output signals for the cases that the sensor faces a large blackbody source or the micromachined source EMIRS 200. Alternatively the knowledge of the ambient temperature can be used to calculate the effects of signal variation or filter wavelength shifts associated with changes of the ambient temperature. Since several ASIC parameters can be controlled externally there are different options how to use the ASIC. The integrated thermopile sensor can either be used with pre-set parameters, giving the system manufacturer a better and easier access to the gas-concentration proportional sensor signal and providing additional information on ambient temperature. The gas dependent signal output and temperature reference output are in a range that allows a direct connection to standard low-cost ADC and μC without further analog circuitry.

| HIS integrated Sensor | | | fov 180° large blackbody 500K ambient 298K | dist. micromachined source to sensor =13 mm no optics source supply 5V |
|-----------------------|--------|------|--|---|
| type | filter | gain | net output signal / V | |
| A11 | CO2 | 900 | 1.39 | |
| B11 | CO2 | 900 | 3.32 | |
| C11 | CO2 | 900 | 3.41 | |
| A11 | CO2 | 3000 | | 0.155 |
| B11 | CO2 | 3000 | | 0.155 |
| C11 | CO2 | 3000 | | 0.155 |
| A21 | CO2 | 300 | 1.18 | |
| B21 | CO2 | 300 | 2.71 | |
| C21 | CO2 | 300 | 2.91 | |
| A21 | CO2 | 3000 | | 0.42 |
| B21 | CO2 | 3000 | | 0.42 |
| C21 | CO2 | 3000 | | 0.42 |

Table 1: Sensor output for different sources (no gas)

More Information in: Simon, Leneke, et al.: “Thermopile Sensors and IR Sources for Gas Detection with Improved Functionality”; Proceedings of Sensors Conference, Section B8.5; Nürnberg, 10.-12.05.2005

| Gas | CWL/nm | Tol/% | Tol/nm | FWHM/nm | HPB Tol/nm |
|------------|---------------|--------------|---------------|----------------|-------------------|
| CH4 | 3300 | 2 | 66 | 160 | 20 |
| HC | 3375 | 1 | 34 | 190 | 10 |
| CO2 | 4260 | 1 | 43 | 180 | 20 |
| CO2 | 4270 | 1 | 43 | 90 | 20 |
| CO2 | 4430 | 1 | 44 | 60 | 5 |
| CO | 4640 | 1 | 46 | 180 | 20 |
| Ref | 3910 | 2 | 78 | 90 | 20 |

Features and Benefits

- Small size, low cost, integrated ASIC with analog outputs
- Surface mountable ceramic leadless chip carrier CLCC with 3.8mm
- Operating range 2.7V to 5.5V , -40°C to 120°C
- Sensor gain adjustable to 4300 or 2150 (preset 4300 with internal pull-up res.)
- Integrated linear temperature reference with a sensitivity of typical 16mV/°C
- Large variety of available filter types for different application

Ordering Information

HCM -> Heimann thermopile sensor and ASIC in a SMD ceramic carrier
Cx2 -> „C“ ceramic carrier of 3.8mm ; „x“ sensor chip (list) ; „2“ ASIC STP1
Fxxx -> application-specific filter type (list)

| Sensor Chip Selection | | |
|------------------------------|-------------------------------|---------------------------|
| <i>Parameter</i> | <i>Sensor chip "1"</i> | <i>Sensor chip "2"</i> |
| Absorbing area | 0.61x 0.61mm ² | 1.2 x 1.2mm ² |
| Sensitivity | 50 V/W | 38 V/W |
| Voltage response | 19 Vmm ² /W | 55 Vmm ² /W |
| Resistance | 85 kOhm | 85 kOhms |
| Time constant | 5ms | 8ms |
| Filter Selection | | |
| <i>Filter Type</i> | <i>Application</i> | <i>Specification</i> |
| F4.26-180 | CO ₂ gas detection | NBP CWL 4.26µm HPB 180nm |
| F4.27-90 | CO ₂ gas detection | NBP CWL 4.27µm HPB 90nm |
| F4.43-60 | CO ₂ gas detection | NBP CWL 4.43µm HPB 60nm |
| F4.64-180 | CO gas detection | NBP CWL 4.64µm HPB 180nm |
| F3.30-160 | HC gas detection | NBP CWL 3.30µm HPB 160nm |
| F3.37-190 | HC gas detection | NBP CWL 3.375µm HPB 190nm |
| F3.91-90 | gas reference | NBP CWL 3.91µm HPB 90nm |
| F5.5 | temperature detection | LWP Cut On 5.5µm |
| F8-14 | temperature detection | BP HPP 8µm to 14µm |


Please contact Heimann customer service for special filter requirements.

Operating Conditions


| Parameter | Typical Value | Unit | Condition |
|-----------------------------|-----------------------|--------|---------------------------|
| Supply voltage VDD | (2.7).. 3 .. 5..(5.5) | V | +Vs |
| Supply voltage VSS | 0 | V | -Vs , Ground |
| Supply current | 1 | mA | Without load |
| Open loop gain | 90 | dB | |
| Low pass frequency | 240 | Hz | ASIC |
| PSRR | >40 | dB | |
| Output voltage range | 0.15 .. (VDD-0.15) | V | |
| Start up time after POR | Max. 0.5 | sec | Electrical start up |
| Noise voltage input related | 45 | nV/√Hz | Output TPO; Sensor + ASIC |
| Zero input sensor signal | 1.25 | V | Output TPO |
| Sensor gain adjustment | 4300 or 2150 | V/V | Output TPO ; adjustable |
| Temp. ref. voltage at 25°C | 1.45 | V | Output TRO |
| Sensitivity temp. reference | 16 | mV/°C | Linear ; Output TRO |
| Field of view | 120 | degree | |
| Operating temperature | -40.. 120 | °C | |

Pin Assignment


| Pin No. | Sym bol | Description |
|---------|----------|--|
| 1 | GAIN | Gain factor 4300 (Internal pull up or VDD on GAIN) Gain factor 2150 (VSS/GND on GAIN) |
| 3 | VDD | Positive supply voltage |
| 4 / 8 | VSS/ GND | Negative supply voltage / Ground (0V) |
| 6 | TPO | Analog temperature reference output voltage |
| 7 | TRO | Amplified thermopile sensor output voltage |

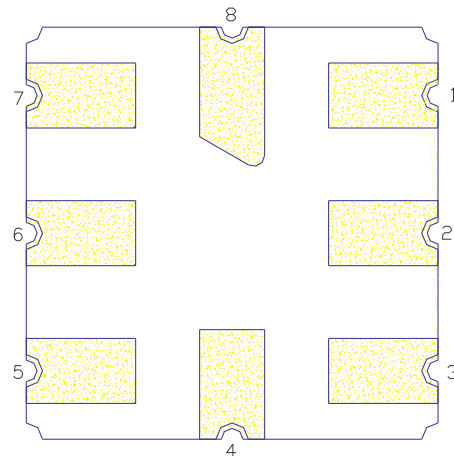


Dimensions

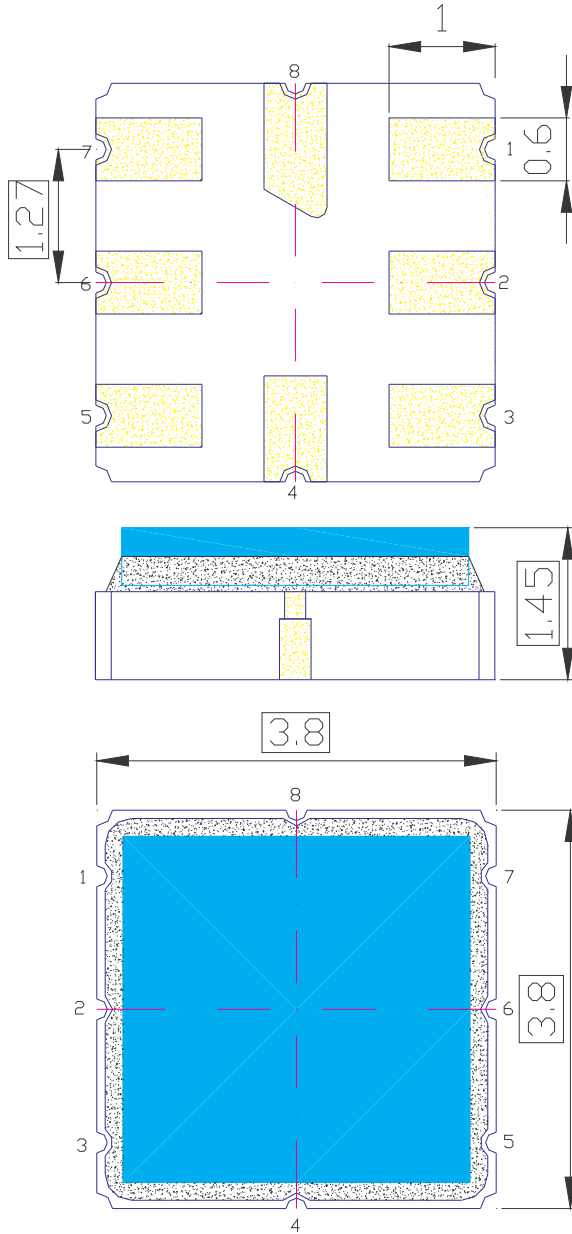

HCM C12 ..

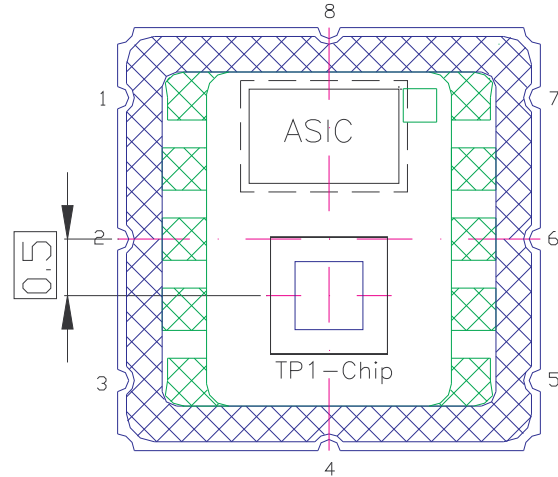

HCM C22 ..

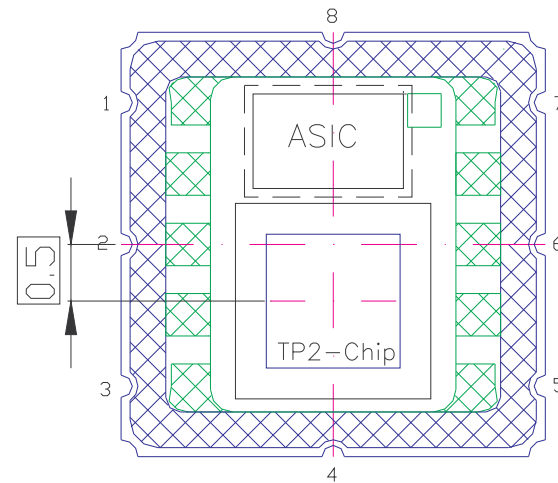

Application Hints

Heimann integrated sensors are used for non-contact temperature measurements. A thermopile sensor and a signal conditioning circuit (ASIC) are integrated in the same housing. The thermopile sensor converts the temperature radiation of an object surface to an electrical signal (voltage) by thermocouples (Seebeck effect). The sensor output voltage is related to the object temperature and object emissivity (radiation) as well as to the sensor chip temperature (housing temperature) and surrounding temperature (radiation) by the following equation :

$$VS = K * \varepsilon * (TO^n - TS^n) \quad \text{at } TA=TS$$

VS -> sensor output voltage ; K -> constant apparatus factor ; ε -> object emissivity ; TO -> object temperature ; TA -> ambient (surrounding) temperature ; TS -> sensor (housing) temperature ; n -> exponent to describe the temperature dependency of the signal voltage

The low noise amplifier of the ASIC transforms the sensor signal to a suitable voltage range. A temperature related voltage provided by the ASIC can be used to compensate ambient temperature drift effects.

A gas concentration can be measured by monitoring the absorption of an infrared light beam. The base equation for gas concentration measurement in the infrared way is Beer's law :

$$I=I(0)*\exp(-k*c*L)$$

I -> radiant flux at the point of measurement
I(0) -> base radiant flux of the test system without gas absorption
k -> constant (gas and filter specific)
L -> measuring distance
c -> gas concentration

The radiant flux is proportional to the output voltage of the sensor module :

$$U/U(0) \sim I/I(0) .$$

A special infrared light source is used to generate the radiant heat. The infrared source needs to be pulsed to eliminate parasitic temperature influences.

Don't hesitate to contact HEIMANN Sensor for support to use our long-time experience in infrared sensors and sensor modules.

Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

Preliminary Datasheet
 Digital Sensor Module with 2 IR Channels
 Type HID E2x Fyyy Fzzz




Features and Benefits

- Thermopile Sensor with ASIC in TO-5 housing with 4 leads
- 2 IR channels with low noise chopper amplifiers and programmable gain
- Digital voltage output (via SMBus compatible RAM access) or PWM output
- 3V and 5V supply ranges available
- Complies with ROHS regulations

Ordering Information

HID : Heimann thermopile sensors and ASIC in TO-5 housing
 E2 : ->„E“ cap with 2 filter openings ;
 ->„2“ two thermopile sensors of type TP2
 x : ASIC supply voltage ->„4“ : 5V ; ->„5“ : 3V
 Fyyy : Filter 1 of IR channel 1, selection acc. to filter list
 Fzzz : Filter 2 of IR channel 2, selection acc. to filter list


e.g. HID E24 F3.91-90 F4.26-180

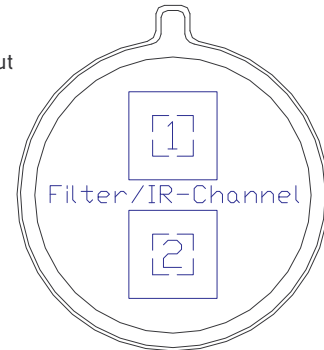

| Filter Selection (Please contact Heimann customer service for special filter requirements) | | |
|---|--------------------|---------------------------|
| <i>Filter Type</i> | <i>Application</i> | <i>Specification</i> |
| F5.30-180 | NO gas detection | NBP CWL 5.30µm HPB 180nm |
| F4.64-180 | CO gas detection | NBP CWL 4.64µm HPB 180nm |
| F4.43-60 | CO2 gas detection | NBP CWL 4.43µm HPB 60nm |
| F4.26-180 | CO2 gas detection | NBP CWL 4.26µm HPB 180nm |
| F4.27-90 | CO2 gas detection | NBP CWL 4.27µm HPB 90nm |
| F3.91-90 | gas reference | NBP CWL 3.91µm HPB 90nm |
| F3.37-190 | HC gas detection | NBP CWL 3.375µm HPB 190nm |
| F3.30-160 | HC gas detection | NBP CWL 3.30µm HPB 160nm |

Pin Configuration

| <i>Pin</i> | <i>Sym</i> | <i>Description</i> |
|------------|------------|--|
| 1 | SCL | Digital input , serial clock in SMBus compatible mode |
| 2 | VDD | Positive supply voltage |
| 3 | SDA / PWM | Digital I/O , data input /output in SMBus compatible mode (open drain), pulse width modulated temperature(s) in PWM mode |
| 4 | VSS | Negative supply voltage / Ground (0V) (connected to housing) |

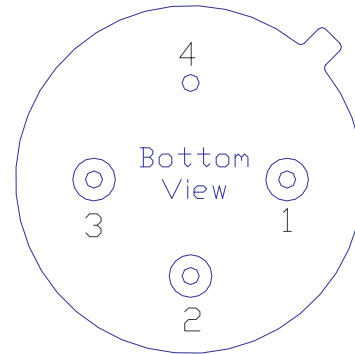

Maximum Ratings

| <i>Parameter</i> | <i>Max. value</i> | <i>Unit</i> | <i>Condition</i> |
|----------------------|-------------------|-------------|------------------|
| Supply voltage 1 VDD | 7 | V | Type 5V |
| Supply voltage 2 VDD | 5 | V | Type 3V |
| Reverse voltage | 0.4 | V | Ground |
| ESD sensitivity | 2 | kV | Human body |
| Storage temperature | -40.. 125 | °C | |

HEIMANN Sensor GmbH
 Grenzstr. 22
 D-01109 Dresden
 Rohrbergstr. 7
 D-65343 Eltville

Managing Director
 Dr. J. Schieferdecker
 Reg. at District Court
 Dresden HRB20692
 VAT-ID DE813444739


Internet: www.heimannsensor.com
 Mail: info@heimannsensor.com
 Phone 49 (0) 6123 60 50 30
 Fax 49 (0) 6123 60 50 39

Features and Benefits


- Thermopile Sensor with ASIC in TO39 housing mounted
- Lens optics with 8:1 D:S ratio
- Digital temperature output (SMBus compatible) or PWM output
- Temperature resolution < 0.1°C (RAM access by SMBus compatible operation)
- High accuracy over wide sensor temperature and object temperature ranges
- 3V and 5V versions available
- Complies with ROHS regulations

Ordering Information

HID -> Heimann thermopile sensor and ASIC
 in a TO39 housing mounted on pcb
 L1 -> „L“ lens cap TO39 ; „1“ sensor chip TP1
 x -> ASIC supply voltage „4“ : 5V or „5“ : 3V
 FL5.5 -> Infrared lens with 5.5mm focal length
 T380 -> Object temperature range




Pin Configuration

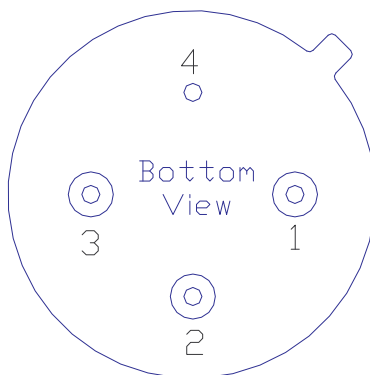

| Pin | Symbol | Description |
|-----|-------------|--|
| 1 | SCL | Digital input , serial clock in SMBus compatible mode |
| 2 | SDA/ PWM | Digital I/O , data input /output in SMBus compatible mode (open drain), pulse width modulated temperature(s) in PWM mode |
| 3 | VDD | Positive supply voltage |
| 4 | VSS | Negative supply voltage / Ground (0V) (connected to housing) |

Dimensional Drawings

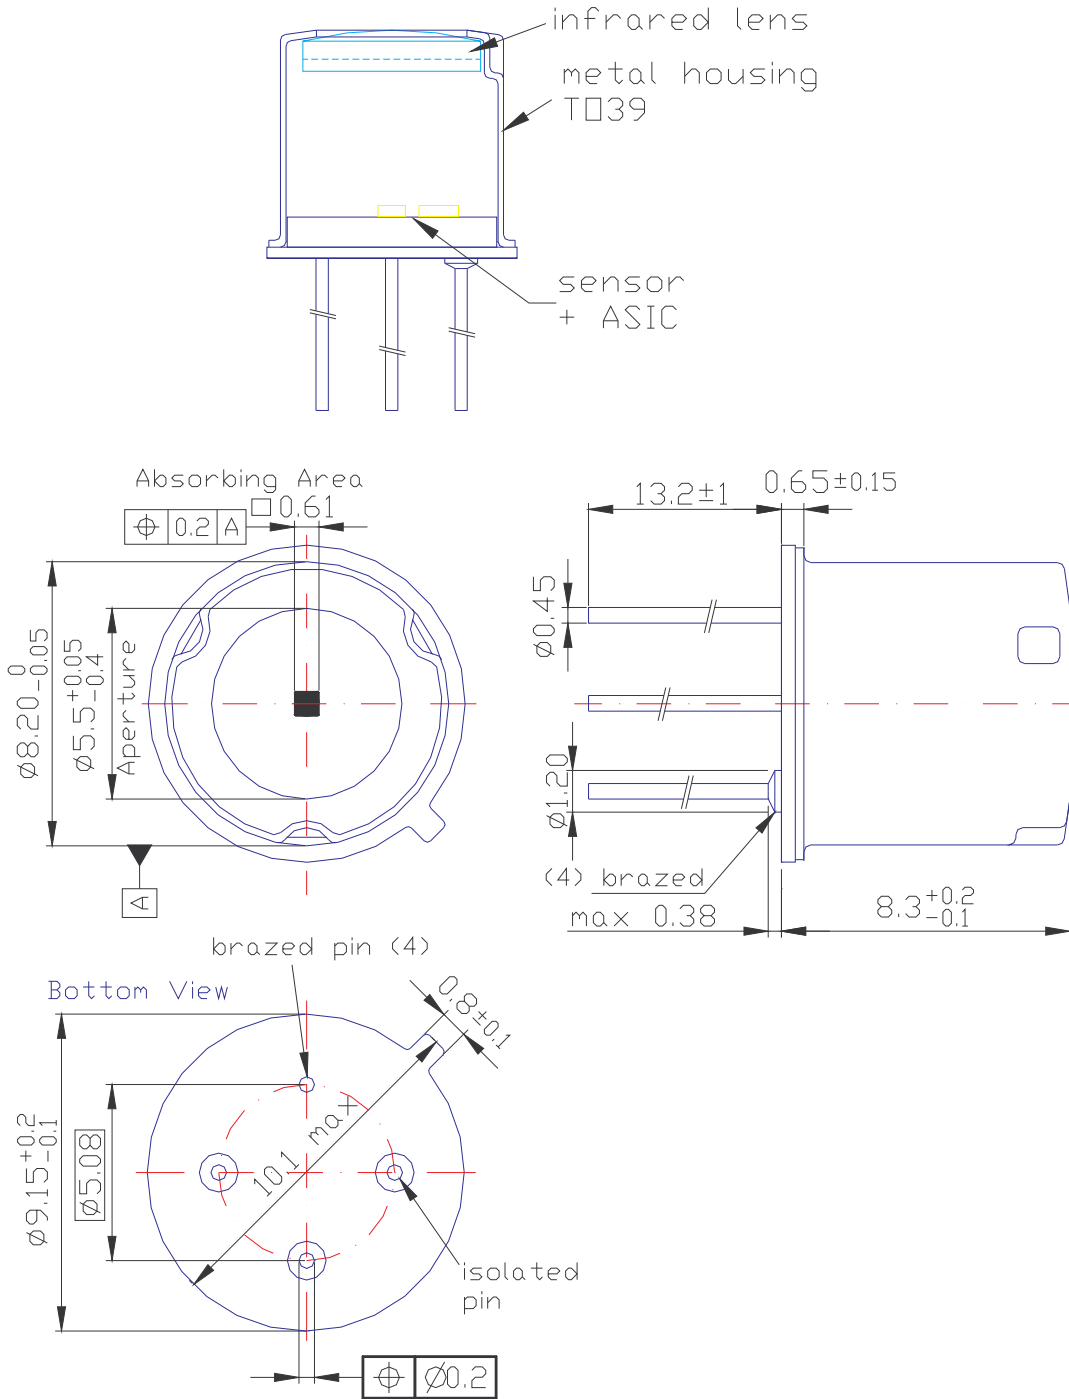


Maximum Ratings

| <i>Parameter</i> | <i>Max. value</i> | <i>Unit</i> | <i>Condition</i> |
|----------------------|-------------------|-------------|------------------|
| Supply voltage 1 VDD | 7 | V | Type 5V |
| Supply voltage 2 VDD | 5 | V | Type 3V |
| Reverse voltage | 0.4 | V | Ground |
| ESD sensitivity | 2 | kV | Human body |
| Storage temperature | -40.. 125 | °C | |


Operating Conditions

| <i>Parameter</i> | <i>Typical Value</i> | <i>Unit</i> | <i>Condition</i> |
|--------------------------------------|--|-----------------|----------------------------------|
| Supply voltage 1 VDD | 5 | V | Preset option "x -> 4" |
| Supply voltage 2 VDD | 3 | V | Preset option "x -> 5" |
| Supply voltage VSS | 0 | V | Ground |
| Supply current | 1 | mA | Without load |
| Start up time after POR | 0.15 | sec | |
| Sensor absorbing area | 0.61 x 0.61 | mm ² | Type TP1 |
| Object temperature range | -30 .. +380 | °C | Type "T380" |
| Ambient temperature range | -40 .. +125 | °C | |
| Response time | 5 | ms | Sensor chip |
| Refresh rate | 100 .. 250 | ms | Temperature signal |
| IR transmission | 52 | % | Wavelength range 5.5µm to 13.5µm |
| Operating temperature | -40.. 125 | °C | |
| Interface (EEPROM Configuration) | 2-wire SMBus compatible, output preset to open drain NMOS | | |
| | 1-wire PWM output, 10 bit resolution, output configurable to push-pull or open drain | | |

Field of View – Definition and Sample Measurement

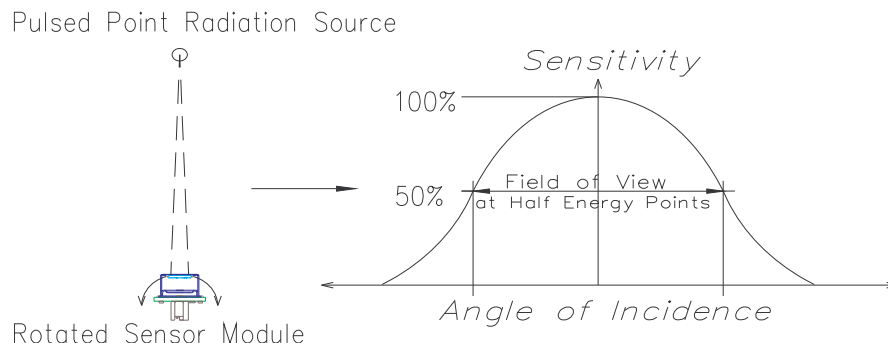

| parameter | limits | | | unit | conditions |
|---------------|--------|-----|-----|--------|-----------------------|
| | Min | Typ | Max | | |
| Optical axis | | 0 | | degree | Sensor view direction |
| Field of View | | 6 | | degree | 50% energy points |
| D:S Ratio | | 8:1 | | | Distance to spot size |

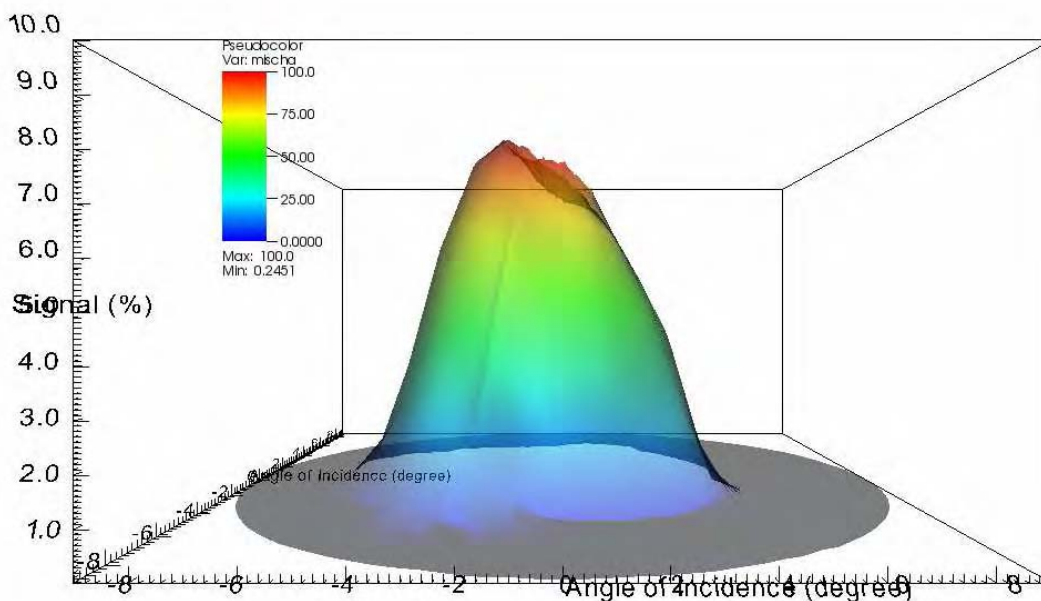

Temperature Performance

| | | Sensor (Ambient) Temperature [°C] | | | | |
|-------------------------|------------|-----------------------------------|---------|-----------|------------|---------------------------|
| | | -40 .. 0 | 0 .. 50 | 50 .. 100 | 100 .. 125 | |
| Object Temperature [°C] | -40 .. 0 | ±3°C | ±2°C | ±3°C | ±4°C | Temperature Accuracy [°C] |
| | 0 .. 60 | ±2°C | ±1°C | ±1.5°C | ±2.5°C | |
| | 60 .. 120 | ±3°C | ±2°C | ±2°C | ±3°C | |
| | 120 .. 180 | ±4°C | ±2°C | ±2.5°C | ±3.5°C | |
| | 180 .. 240 | ±5°C | ±3°C | ±3°C | ±4°C | |
| | 240 .. 380 | ±5°C | ±4°C | ±4°C | ±5°C | |

Notes to the temperature performance:

- The specified temperature performance presents preliminary findings based on sample investigations using special test equipment.
- The temperature accuracies are achievable by following conditions
 - thermal equilibrium of the sensor
 - no temperature differences in the sensor package
 - the object fills the sensor field of view completely
 - homogenously distributed temperature on the object surface
 - high and uniform emissivity of the object surface in the interesting infrared range

Liability

The contents of this document are subject to change without notice. Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.


Preliminary Datasheet
 Digital Sensor Module with 2 IR Channels
 Type HID E2x Fyyy Fzzz



Operating Conditions

| Parameter | Typical Value | Unit | Condition |
|--------------------------------------|--|---------------------|---------------------------|
| Supply voltage 1 VDD | 5 | V | Preset option "x -> 4" |
| Supply voltage 2 VDD | 3 | V | Preset option "x -> 5" |
| Supply voltage VSS | 0 | V | Ground |
| Supply current | 1 | mA | Without load |
| Start up time after POR | 0.15 | sec | |
| Sensor absorbing area | 1.2 x 1.2 | mm ² | Sensor type TP2 |
| Sensitivity thermopile sensor | 38 | V/W | Sensor chip, 500K, 1Hz |
| Voltage response thermopile sensor | 55 | Vmm ² /W | Sensor chip |
| Gain factor preset | 100 | V/V | Range 1 .. 100 |
| IR output voltage range | -475 .. 475 | mV | RAM cells V _{TP} |
| Voltage resolution | 0.0145 | mV/step | |
| Response time | 8 | ms | Sensor chip |
| Refresh rate | 100 .. 250 | ms | Temperature signal |
| Temperature sensor range | -40 .. +125 | °C | RAM cell T _A |
| Operating temperature range | -40.. 125 | °C | |
| Interface (EEPROM Configuration) | 2-wire SMBus compatible, output preset to open drain NMOS | | |
| | 1-wire PWM output, 10 bit resolution, output configurable to push-pull or open drain | | |

Dimensional Drawings

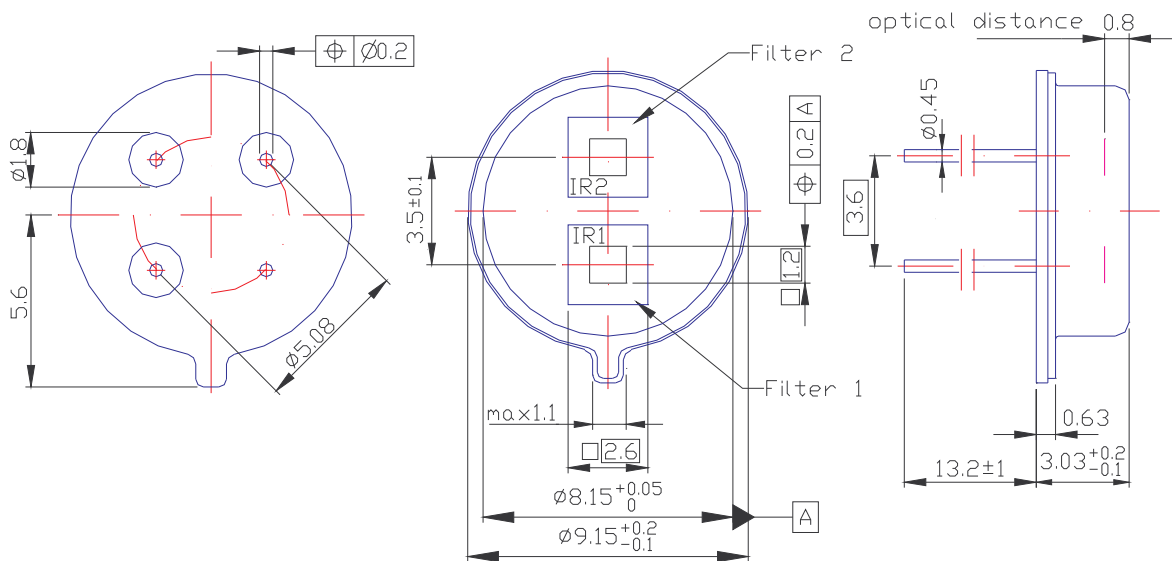

HEIMANN Sensor GmbH
 Grenzstr. 22
 D-01109 Dresden
 Rohrbergstr. 7
 D-65343 Eltville

Managing Director
 Dr. J. Schieferdecker
 Reg. at District Court
 Dresden HRB20692
 VAT-ID DE813444739


Internet: www.heimanssensor.com
 Mail: info@heimanssensor.com
 Phone 49 (0) 6123 60 50 30
 Fax 49 (0) 6123 60 50 39

Features and Benefits


- Thermopile Sensor with ASIC in TO39 housing mounted
- Lens optics with 8:1 D:S ratio
- Digital temperature output (SMBus compatible) or PWM output
- Temperature resolution < 0.1°C (RAM access by SMBus compatible operation)
- High accuracy over wide sensor temperature and object temperature ranges
- 3V and 5V versions available
- Complies with ROHS regulations

Ordering Information

HID -> Heimann thermopile sensor and ASIC
 in a TO39 housing mounted on pcb
 L1 -> „L“ lens cap TO39 ; „1“ sensor chip TP1
 x -> ASIC supply voltage „4“ : 5V or „5“ : 3V
 FL5.5 -> Infrared lens with 5.5mm focal length
 T380 -> Object temperature range



Pin Configuration

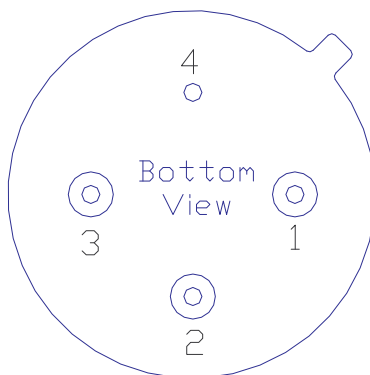

| Pin | Symbol | Description |
|-----|-------------|--|
| 1 | SCL | Digital input , serial clock in SMBus compatible mode |
| 2 | SDA/ PWM | Digital I/O , data input /output in SMBus compatible mode (open drain), pulse width modulated temperature(s) in PWM mode |
| 3 | VDD | Positive supply voltage |
| 4 | VSS | Negative supply voltage / Ground (0V) (connected to housing) |

Features and Benefits

- Small size, low cost, integrated ASIC with analog outputs
- 4-pin metal housing TO46
- Operating range 2.7V to 5.5V , -40°C to 120°C
- Sensor gain preset to 4300 or 2150
- Integrated linear temperature reference with a sensitivity of typical 16mV/°C
- Large variety of available filter types for different application

Ordering Information

HIM -> Heimann thermopile sensor and ASIC in a TO46 housing
 Jx2 -> „J” standard cap TO46 ; „x” sensor chip (list) ; „2” ASIC STP1
 Fxxx -> application-specific filter type (list)
 Gxxx -> sensor gain preset G2150 or G4300

| Sensor Chip Selection | | |
|------------------------------|-------------------------------|---------------------------|
| <i>Parameter</i> | <i>Sensor chip "1"</i> | <i>Sensor chip "2"</i> |
| Absorbing area | 0.61x 0.61mm ² | 1.2 x 1.2mm ² |
| Sensitivity | 50 V/W | 38 V/W |
| Voltage response | 19 Vmm ² /W | 55 Vmm ² /W |
| Resistance | 85 kOhm | 85 kOhms |
| Time constant | 5ms | 8ms |
| Filter Selection | | |
| <i>Filter Type</i> | <i>Application</i> | <i>Specification</i> |
| F4.26-180 | CO ₂ gas detection | NBP CWL 4.26µm HPB 180nm |
| F4.27-90 | CO ₂ gas detection | NBP CWL 4.27µm HPB 90nm |
| F4.43-60 | CO ₂ gas detection | NBP CWL 4.43µm HPB 60nm |
| F4.64-180 | CO gas detection | NBP CWL 4.64µm HPB 180nm |
| F3.30-160 | HC gas detection | NBP CWL 3.30µm HPB 160nm |
| F3.37-190 | HC gas detection | NBP CWL 3.375µm HPB 190nm |
| F3.91-90 | gas reference | NBP CWL 3.91µm HPB 90nm |
| F5.5 | temperature detection | LWP Cut On 5.5µm |
| F8-14 | temperature detection | BP HPP 8µm to 14µm |

Please contact Heimann customer service for special filter requirements.



Operating Conditions

| Parameter | Typical Value | Unit | Condition |
|-----------------------------|-----------------------|------------------------|---------------------------|
| Supply voltage VDD | (2.7).. 3 .. 5..(5.5) | V | +Vs |
| Supply voltage VSS | 0 | V | -Vs , Ground |
| Supply current | 1 | mA | Without load |
| Open loop gain | 90 | dB | |
| Low pass frequency | 240 | Hz | ASIC |
| PSRR | >40 | dB | |
| Output voltage range | 0.15 .. (VDD-0.15) | V | |
| Start up time after POR | Max. 0.5 | sec | Electrical start up |
| Noise voltage input related | 45 | nV/ $\sqrt{\text{Hz}}$ | Output TPO; Sensor + ASIC |
| Zero input sensor signal | 1.25 | V | Output TPO |
| Sensor gain preset | 4300 or 2150 | V/V | Output TPO ; optional |
| Temp. ref. voltage at 25°C | 1.45 | V | Output TRO |
| Sensitivity temp. reference | 16 | mV/°C | Linear ; Output TRO |
| Field of view | 70 | degree | Sensor chip TP1 |
| Operating temperature | -40.. 120 | °C | |

Pin Assignment


| Pin No | Symbol | Description |
|--------|--------|---|
| 1 | VDD | Positive supply voltage |
| 2 | TPO | Amplified analog sensor output voltage |
| 3 | TRO | Analog temperature reference output voltage |
| 4 | VSS | Negative supply voltage / Ground (0V) |

bottom view

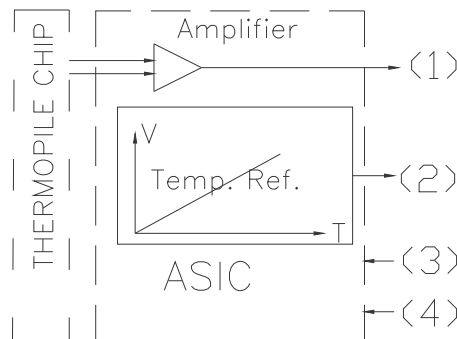


Dimensions

HIM J12 ..

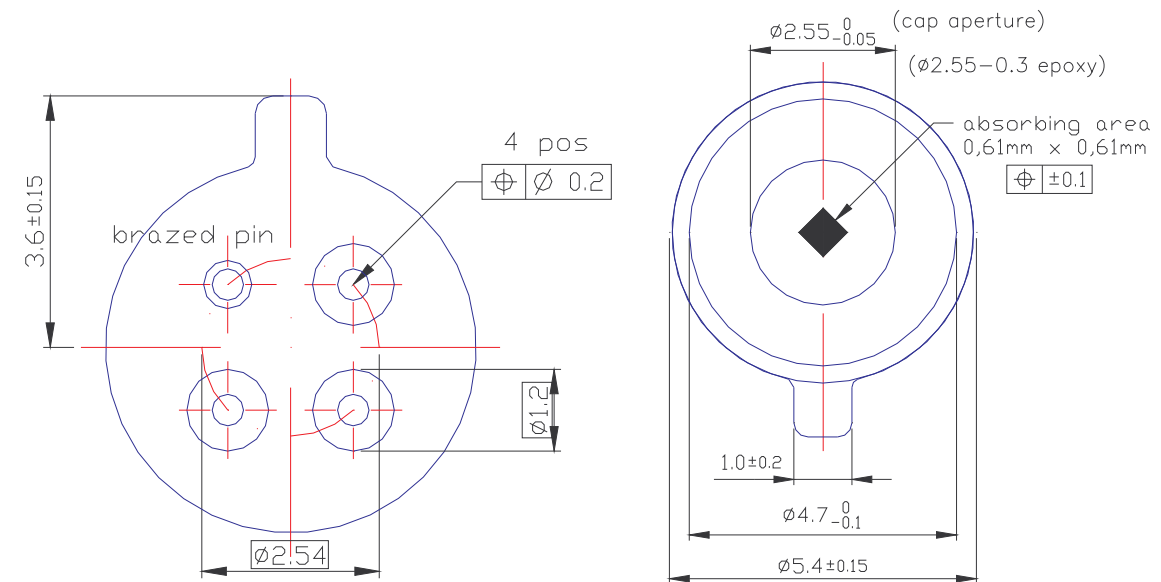

HIM J22 ..

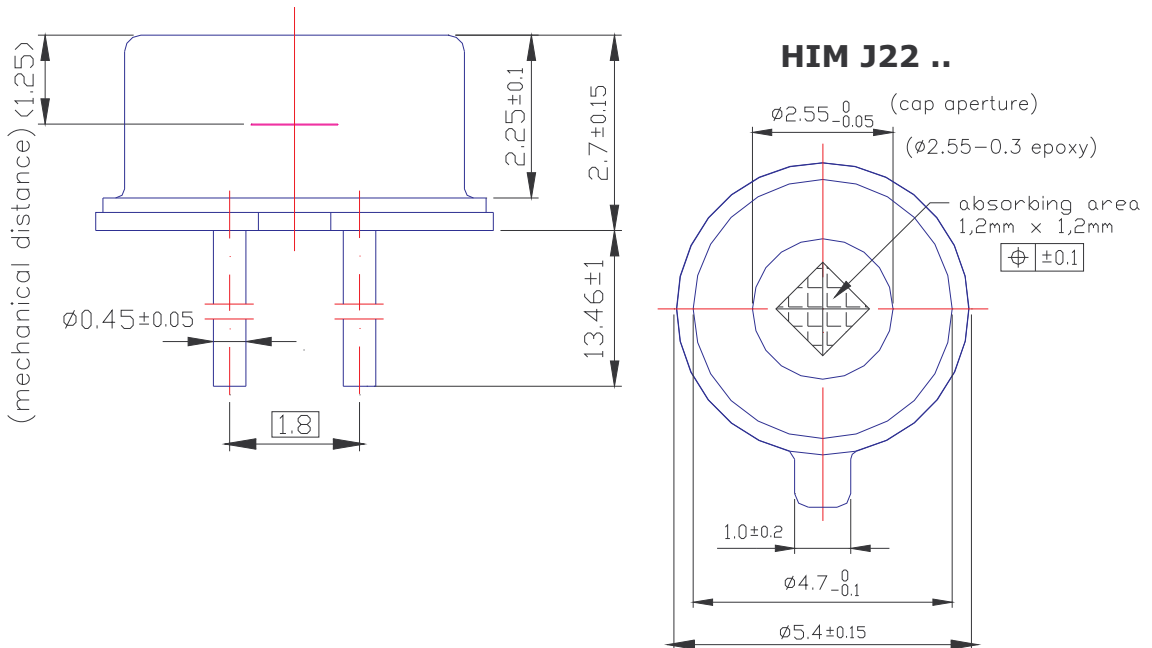

Application Hints

Heimann integrated sensors are used for non-contact temperature measurements. A thermopile sensor and a signal conditioning circuit (ASIC) are integrated in the same housing. The thermopile sensor converts the temperature radiation of an object surface to an electrical signal (voltage) by thermocouples (Seebeck effect). The sensor output voltage is related to the object temperature and object emissivity (radiation) as well as to the sensor chip temperature (housing temperature) and surrounding temperature (radiation) by the following equation :

$$VS = K * \varepsilon * (TO^n - TS^n) \quad \text{at } TA=TS$$

VS -> sensor output voltage ; K -> constant apparatus factor ; ε -> object emissivity ; TO -> object temperature ; TA -> ambient (surrounding) temperature ; TS -> sensor (housing) temperature ; n -> exponent to describe the temperature dependency of the signal voltage
The low noise amplifier of the ASIC transforms the sensor signal to a suitable voltage range. A temperature related voltage provided by the ASIC can be used to compensate ambient temperature drift effects.

A gas concentration can be measured by monitoring the absorption of an infrared light beam. The base equation for gas concentration measurement in the infrared way is Beer's law :

$$I=I(0)*\exp(-k*c*L)$$

I -> radiant flux at the point of measurement
I(0) -> base radiant flux of the test system without gas absorption
k -> constant (gas and filter specific)
L -> measuring distance
c -> gas concentration

The radiant flux is proportional to the output voltage of the sensor module :
 $U/U(0) \sim I/I(0)$.


A special infrared light source is used to generate the radiant heat. The infrared source needs to be pulsed to eliminate parasitic temperature influences.
Don't hesitate to contact HEIMANN Sensor for support to use our long-time experience in infrared sensors and sensor modules.

Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.



Integrated Sensor For NDIR Gas Detection

- Thermopile single sensor with integrated ASIC
- 2 analog outputs for amplified thermopile and reference signal
- Simple linear reference function for external compensation
- TO-5 or TO-18 metal housing with 4 connections
- Fast sensor response time of 8 msec typical
- Various types equipped with different filters available
- Gas types for NDIR gas detection CO₂, CO, NO_x, HC, (H₂O)
- IR-Lamp or broadband IR-Source available

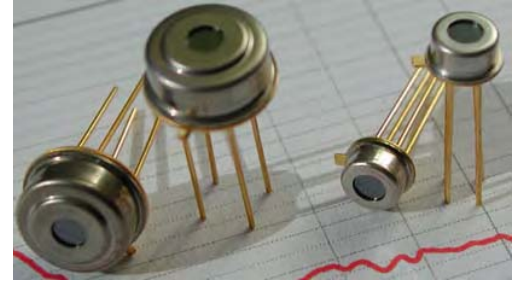


| Parameter | Typ. Value ASIC 1 | Typ. Value ASIC 2 | Unit | Condition |
|--------------------------|-------------------|-------------------|-------|-------------------------|
| supply voltage | 5 | 3 or 5 | V | VDD |
| supply current | 1.7 | 1 | mA | without load |
| output voltage range | 0.3 .. VDD-0.3 | 0.3 .. VDD-0.3 | V | |
| output load | > 20 | > 20 | kOhm | for optimal operation |
| thermopile amplification | 5500 | 4000 | V/V | |
| gradient temp. reference | 15 | 15 | mV/°C | linear ; 1.225V at 25°C |
| response time | 8 | 8 | ms | t / T = 63% ; sensor |
| transmission range | filter list | filter list | µm | narrow band pass |
| sensor housing | TO-5 | TO-5 or TO-18 | | |
| operating temperature | -40 to 120 | -40 to 120 | °C | |

Measuring Principle

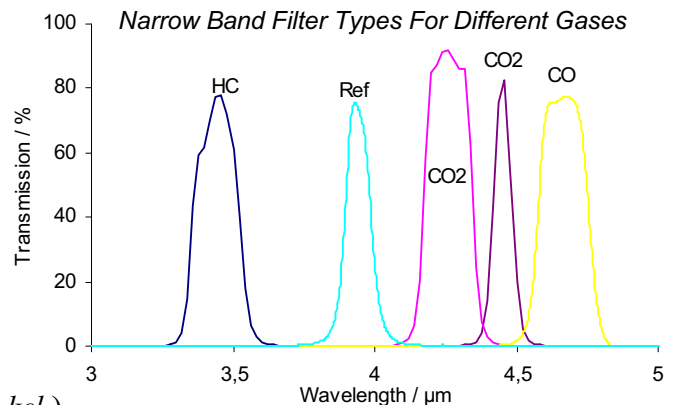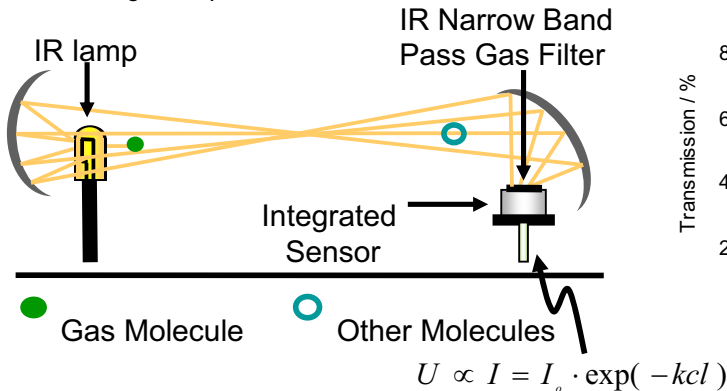


Schematic



Pin Assignment

- (1) 1: AOT → Sensor
- (2) 2: AOR → Temp. Reference
- (3) 3: VDD → Supply Voltage
- (4) 4: Vss → Ground

TO Header Bottom Side



Package drawings TO-5 and TO-18 see HTS- and HMS series datasheet

Modifications reserved Rev. 08 / 08.04.2008



**4-Pin Gas Sensor with
Integrated Signal
Conditioning**



Datasheet HEIMANN Sensor Integrated Module TO-Case for Gas Detection CO₂ - Type HIS A21 F4.26 4PIN

HEIMANN Sensor thermopile modules are designed for the non-contact temperature measurement based on infrared radiation. A thermopile sensor and a self-designed application specific integrated circuit (ASIC) is integrated in the sensor case. The ASIC is used for the sensor signal amplification and supplies a sensor temperature voltage.

Features of the specific sensor module type :

- CO₂ detection by 4% grade infrared narrow band pass filter
- 4-pin TO39-case
- Sensor amplification factor 5500
- Linear temperature reference with a sensitivity of 15mV/°C

Field of View

| parameter | limits | | | unit | conditions |
|---------------|--------|-----|-----|--------|------------|
| | Min | Typ | Max | | |
| field of view | | 70 | | degree | |

Filter Specification

| parameter | minimum | typical | maximum | conditions |
|--|---------|---------|---------|------------|
| Center wavelength (CWL) at 90° angle of incidence | 4.21 μm | 4.26 μm | 4.31 μm | |
| Half power bandwidth (HPB) | 160 nm | 180 nm | 200 nm | |
| Peak transmittance | 70% | | | |
| Average transmittance from visual to band pass region | | | 0.1% | |
| Peak transmission from visual to band pass region | | | 1% | |
| Peak transmittance from band pass region to 8 μm | | | 1% | |
| Base material | | Silicon | | |

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



**4-Pin Gas Sensor with
Integrated Signal
Conditioning**



Datasheet HEIMANN Sensor Integrated Module TO-Case for Gas Detection CO₂ - Type HIS A21 F4.26 4PIN

Operating Conditions

| <i>Parameter</i> | <i>Typical Value</i> | <i>Unit</i> | <i>Condition</i> |
|---------------------------------------|----------------------|-----------------|---------------------|
| Supply voltage VDD | 4.5 .. 5 .. 5.5 | V | +Vs |
| Supply voltage VSS | 0 | V | -Vs , Ground |
| Supply current | 1 .. 1.5 .. 2 | mA | Without load |
| Output voltage range | 0.3 .. VDD-0.3 | V | |
| Start up time after POR | Max. 0.5 | sec | Electrical start up |
| Sensor absorbing area | 1.2 x 1.2 | mm ² | Type TP2 |
| Sensor amplification | 5500 | | Output AOT |
| Response time sensor | 10 | msec | t/T = 63% |
| Temperature reference voltage at 25°C | 1.225 | V | output AOR |
| Sensitivity temperature reference | 15 | mV/°C | Linear ; output AOR |
| Operating temperature | -20.. 120 | °C | |

Pin / Device Configuration

| <i>Pin No.</i> | <i>Symbol</i> | <i>Description</i> |
|----------------|---------------|---|
| 1 | AOT | Amplified analog sensor output voltage |
| 2 | AOR | Analog temperature reference output voltage |
| 3 | VDD | Positive supply voltage (+5V) |
| 4 | VSS | Negative supply voltage / Ground (0V) |

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com




**4-Pin Gas Sensor with
Integrated Signal
Conditioning**



Datasheet HEIMANN Sensor Integrated Module TO-Case for Gas Detection CO₂ - Type HIS A21 F4.26 4PIN

Dimensions / Pin Assignment

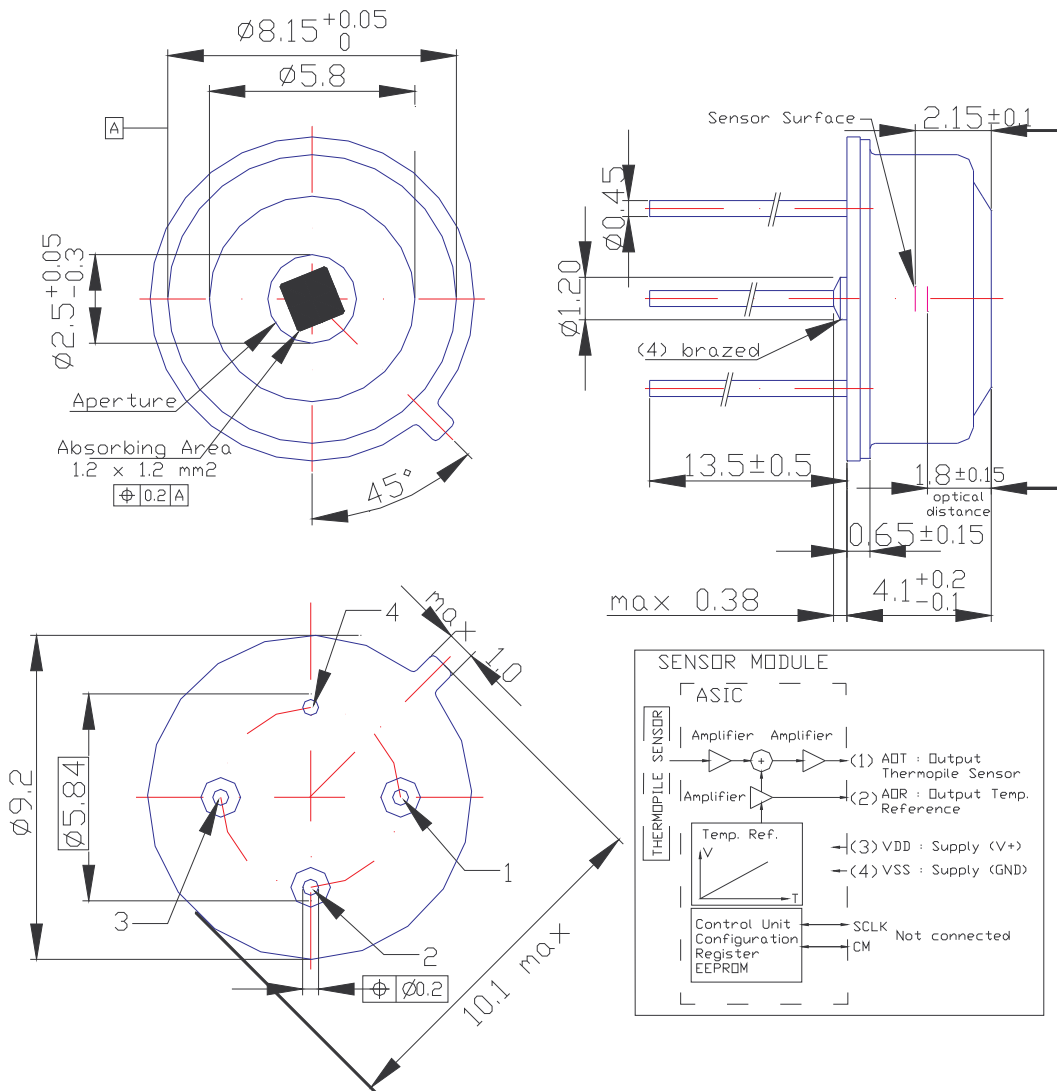

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



**4-Pin Gas Sensor with
Integrated Signal
Conditioning**



Datasheet HEIMANN Sensor Integrated Module TO-Case for Gas Detection CO₂ - Type HIS A21 F4.26 4PIN

Application Hints

The gas concentration can be measured by monitoring the absorption of an infrared light beam. The base equation for gas concentration measurement in the infrared way is Beer's law :

$$I=I(0)*\exp(-k*c*L)$$

I -> radiant flux at the point of measurement

I(0) -> base radiant flux of the test system without gas absorption

k -> constant (gas and filter specific)

L -> measuring distance

c -> gas concentration

The radiant flux is proportional to the output voltage of the sensor module :

$$U/U(0) \sim I/I(0) .$$

A special infrared light source is used to generate the radiant heat. The infrared source needs to be pulsed to eliminate parasitic temperature influences.

The temperature reference output (housing temperature) of the sensor module can be used to compensate ambient temperature drift effects.

Don't hesitate to contact HEIMANN Sensor for support to use our long-time experience in infrared sensors and sensor modules.

Mischa Schulze

Tel. +49 (0)6123 605032

Fax +49 (0)6123 605039

e-mail schulze@heimannsensor.com

Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



6-Pin TO Sensor with Integrated Signal Conditioning



Datasheet HEIMANN Sensor Integrated Module TO-Case Type HIS-Ax1-F8-14


General information about HIS models are described in
“General Datasheet HIS” .

Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

Filter Specification

| <i>parameter</i> | <i>minimum</i> | <i>typical</i> | <i>maximum</i> |
|---|----------------|----------------|----------------|
| Cot on wavelength at half power point | 7.8 μ m | 8 μ m | 8.2 μ m |
| Cut off wavelength at half power point | 13.5 μ m | 14 μ m | 14.5 μ m |
| Average transmission from 9 μ m to 13 μ m | 70% | | |
| Average transmission from visual to band pass | | | 1% |
| Average transmission from band pass to 20 μ m | | | 1% |

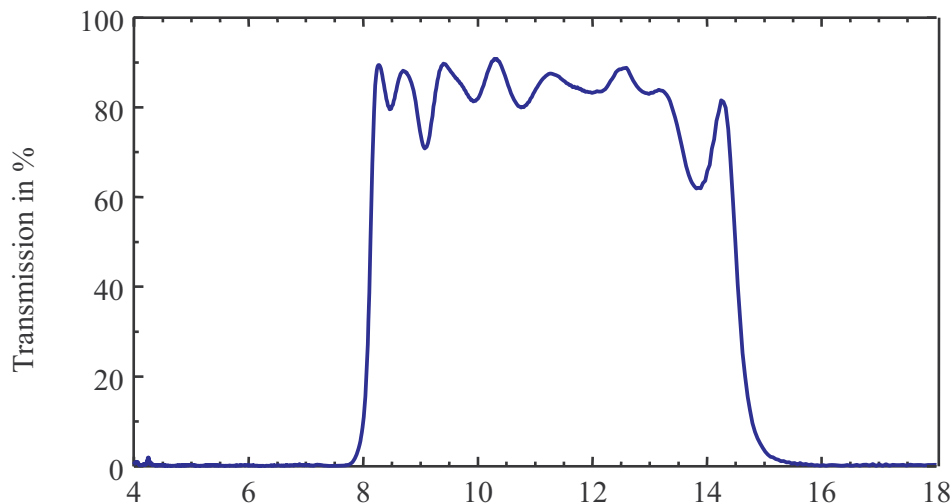

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



6-Pin TO Sensor with Integrated Signal Conditioning



Datasheet HEIMANN Sensor Integrated Module TO-Case Type HIS-Ax1-F8-14 Operating Conditions

| <i>Parameter</i> | <i>Typical Value</i> | <i>Unit</i> | <i>Condition</i> |
|---------------------------------------|----------------------|-----------------|---|
| Supply voltage VDD | 4.5 .. 5 .. 5.5 | V | +Vs |
| Supply voltage VSS | 0 | V | -Vs , Ground |
| Supply current | 1 .. 1.5 .. 2 | mA | Without load |
| Output voltage range | 0.3 .. VDD-0.3 | V | |
| Start up time after POR | Max. 0.5 | sec | Electrical start up |
| Sensor absorbing area | 0,6 x 0,6 | mm ² | Type TP2 |
| Sensor amplification | 150 .. 5500 | | Output AOT , preadjusted |
| Response time sensor | 5 | msec | t/T = 63% |
| Temperature reference voltage at 25°C | 1.225 | V | Output AOR |
| Sensitivity temperature reference | 15 (10 .. 16) | mV/°C | Linear ; output AOR ; not internal compensated (internal compensated) |
| Field of view | 70 | degree | |
| Operating temperature | -20.. 120 | °C | |

Pin / Device Configuration

| <i>Pin No.</i> | <i>Symbol</i> | <i>Description</i> |
|----------------|---------------|---|
| 1 | VDD | Positive supply voltage (+5V) |
| 2 | VSS | Negative supply voltage / Ground (0V) |
| 3 | AOT | Amplified analog sensor output voltage |
| 4 | AOR | Analog temperature reference output voltage |
| 5 | SCLK | Adjustment mode only – serial clock input |
| 6 | CM | Adjustment mode only – programming mode selection |




6-Pin TO Sensor with Integrated Signal Conditioning



Datasheet HEIMANN Sensor Integrated Module TO-Case Type HIS-Ax1-F8-14


Dimensions / Pin Assignment

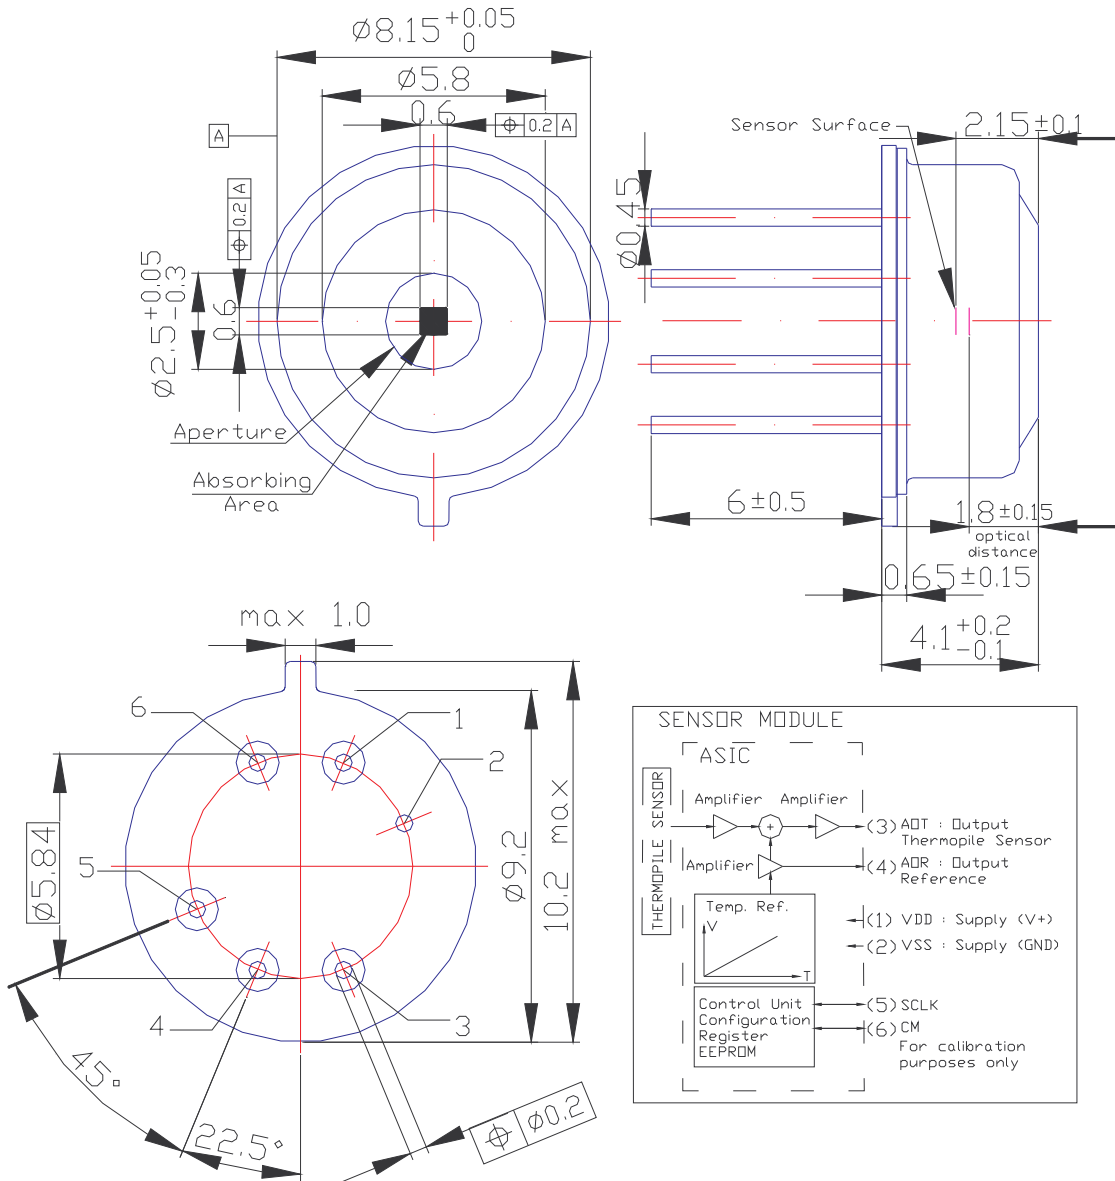

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39


Internet
www.heimannsensor.com
mail: info@heimannsensor.com



HMS Series

Miniature Thermopile Sensors for Remote Temperature Measurement and Gas Analysis

The HMS Series of CMOS compatible thermopile sensor chips in TO46 (or TO18) and even smaller transistor housings, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The smaller package sizes benefit applications in which sensor mounting is a critical parameter. Especially the ultra small HMS Z11 F5.5 sensor with high symmetry (no orientation tap) opens new design and application possibilities. The HMS M-types offers the possibility to integrate an infrared lens into a TO46 housing and to reduce the field of view accordingly. The smaller chip TP1 is well suited for temperature measurements which require a precise measuring spot whereas the chip type TP2 offers higher signal.



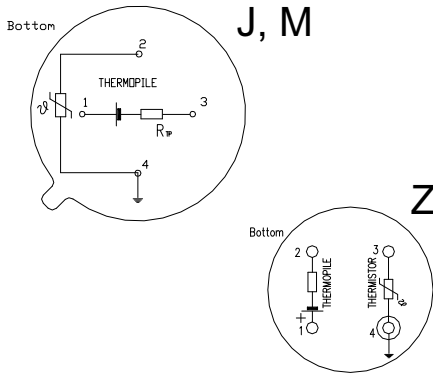


| Parameter | HMS Z11 | HMS J11 | HMS J21 | Unit |
|---|---------------------|---------------------|---------------------|--------------------------|
| element size | 0,61 ² | 0,61 ² | 1,2 ² | mm ² |
| voltage response ¹ | 13 | 13 | 39 | V mm ² /W |
| sensitivity ¹ | 36 | 36 | 27 | V/W |
| resistance R _{TP} ² | 86 | 86 | 84 | k Ohm |
| TC of resistance R _{TP} ² | 0.02 | 0.02 | 0.02 | % / K |
| noise ² | 38 | 38 | 37 | nV/ Hz ^{1/2} |
| detectivity ^{1,2} | 5,6 10 ⁷ | 5.6 10 ⁷ | 8.7 10 ⁷ | cm Hz ^{1/2} / W |
| time constant | < 6 | <6 | 10 | ms |
| thermistor reference ² | 100 | 100 | 100 | kOhm |
| temp.coeff.of thermistor B ³ | 3940 | 3940 | 3940 | K |
| field of view ⁴ | 95 | 120 | 120 | |
| operating temperature | | -20...120 | | °C |
| storage temperature | | -40...120 | | °C |


Ordering Information:

HMS / package shape / chip type /
w/wo thermistor / F desired filter type,
e.g.: HMS J11 F5.5


- 1) filter type F5.5, Tobj=100°C, DC
- 2) at Tamb=25°C
- 3) 25°C, 50°C
- 4) degree at 50% signal level

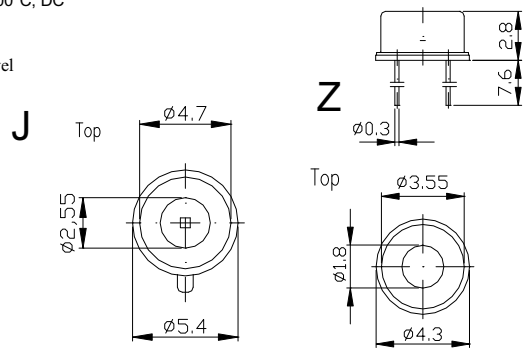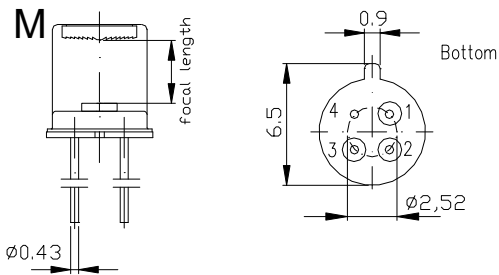

Filter types for temperature measurements

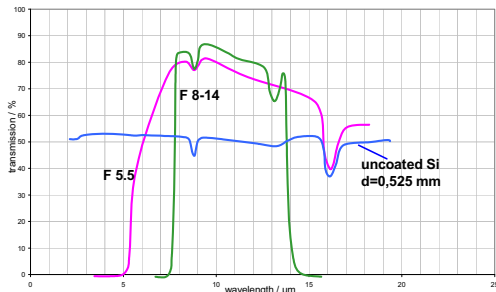

Filter types for Gas Analysis

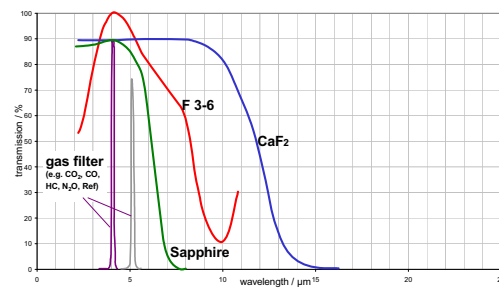

Modifications reserved Rev.07 / 01.10.2004

| | | |
|--------------------------------|-------------------------|---|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HMS Z11 F5.5 |
| Author(s): W. Leneke, M. Simon | Rev.: R 04 / 15.12.2008 | Page 1 of 7 |

Specification Thermopile Sensor

HMS Z11 F5.5

Part No. 1018

R 04

Author(s):

W. Leneke, M. Simon

Revision History

| Version | Date | Remarks |
|---------|------------|---------------------------------|
| R 01 | 29.08.2005 | 1. Draft of HEIMANN Sensor GmbH |
| R 02 | 27.02.2006 | Update packing |
| R 03 | 30.08.2006 | Update drawing |
| R 04 | 15.12.2008 | Update drawing |
| | | |
| | | |

TABLE OF CONTENTS

| | |
|--|----------|
| 1. Purpose, Scope | 2 |
| 2. Absolute Maximum Ratings | 2 |
| 3. General and electro-optical Parameter Thermopile | 3 |
| 4. General and Electrical Parameter Thermistor..... | 4 |
| 5. Filter Characteristics..... | 5 |
| 6. Drawing and Pin Assignment..... | 6 |
| 7. Packing..... | 6 |
| 8. General Directions for Further Processing | 7 |
| 9. Liability..... | 7 |

1. Purpose, Scope

The new thermopile infrared sensor from Heimann Sensor, comprising a new type CMOS compatible sensor chip plus a thermistor reference chip, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The sensor meets the requirements of the European Union RoHS (Regulation of Hazardous Substances) Directive.

The sensor will be available in standard transistor outline packages in different sizes, equipped with an IR transmitting filter window (transmission curve as shown below).


2. Absolute Maximum Ratings

| <i>Parameter</i> | <i>Symbol</i> | <i>Limits</i> | | | <i>Units</i> | <i>Conditions</i> |
|-----------------------|---------------|---------------|-------------|------------|--------------|-------------------|
| | | <i>Min</i> | <i>Typ.</i> | <i>Max</i> | | |
| storage temperature | | -40 | | 100 | °C | |
| operating temperature | | -20 | | 100 | °C | |

3. General and electro-optical Parameter Thermopile

| Parameter | Symbol | Limits | | | Units | Conditions |
|-----------------------|------------------|--------|---------------------|-----|---------------------|---|
| | | Min | Typ. | Max | | |
| element size | | | 0.6*0.6 | | mm ² | absorbing area |
| field of view | FOV | | 94 | | degree | 50% intensity within FOV, see graph |
| resistance | R _{TS} | 69 | 86 | 112 | kΩ | -40 °C to 100 °C |
| voltage response | | 9 | 11.5 | 16 | Vmm ² /W | Filter F5.5, 100 °C, 1Hz |
| voltage sensitivity | S _V | 25 | 35 | 45 | V/W | Filter F5.5, 100 °C, 1Hz |
| time constant | τ | | 6 | 10 | ms | |
| noise voltage | V _{RMS} | | 38 | | nV/√Hz | r.m.s., 25 °C |
| detectivity | D [*] | | 5.6*10 ⁷ | | cm√Hz/W | Filter F5.5, 100 °C, 1Hz |
| Insulation resistance | R _{iso} | 5 | | | GΩ | 10V, 25 °C, 60% r.h., between pin 1 or 2 and 4 (ground) |

Field Of View

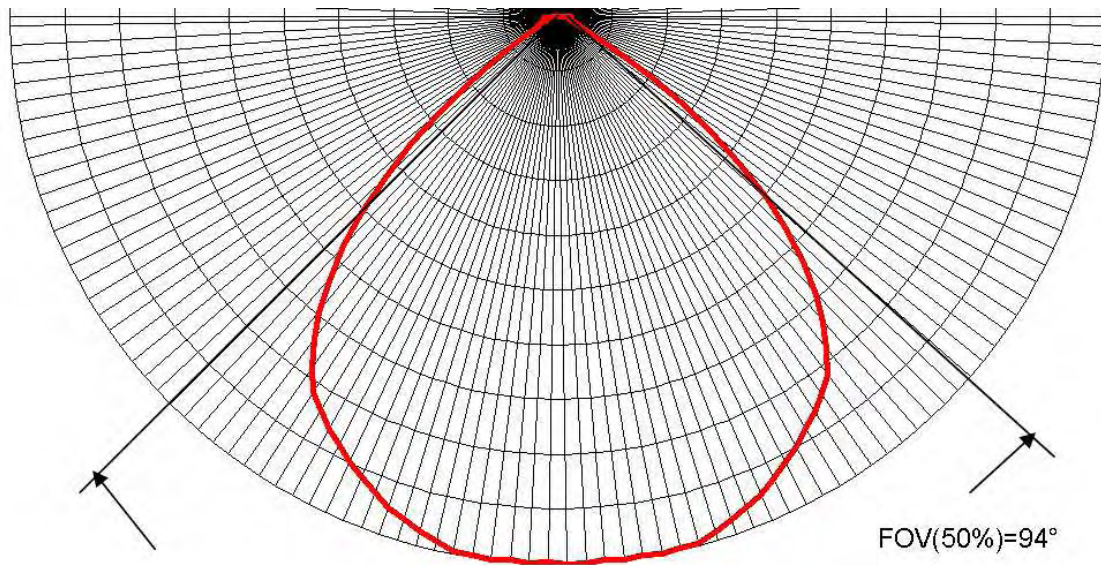


4. General and Electrical Parameter Thermistor

| Type | Thermistor 100kΩ | | | | | |
|------------|------------------|--------|------|------|-------|-------------|
| Parameter | Symbol | Limits | | | Units | Conditions |
| | | Min | Typ. | Max | | |
| resistance | R _{TH} | 95 | 100 | 105 | kΩ | 25 °C |
| BETA-value | β | 3900 | 3940 | 3980 | K | 25 °C/50 °C |


| T / °C | Rth_min / Ohm | Rth_nom / Ohm | Rth_max / Ohm |
|--------|---------------|---------------|---------------|
| -30 | 1557900 | 1655000 | 1753100 |
| -25 | 1163320 | 1234000 | 1306680 |
| -20 | 875826 | 928700 | 981974 |
| -15 | 665010 | 704500 | 744190 |
| -10 | 508730 | 538500 | 568370 |
| -5 | 392108 | 414600 | 437292 |
| 0 | 304466 | 321700 | 338934 |
| 5 | 238072 | 251400 | 264728 |
| 10 | 187444 | 197800 | 208056 |
| 15 | 148568 | 156600 | 164632 |
| 20 | 118404 | 124800 | 131096 |
| 25 | 95000 | 100000 | 105000 |
| 30 | 76537 | 80630 | 84713 |
| 35 | 62032 | 65380 | 68738 |
| 40 | 50543 | 53310 | 56077 |
| 45 | 41386 | 43680 | 45984 |
| 50 | 34070 | 35980 | 37890 |
| 55 | 28174 | 29770 | 31366 |
| 60 | 23405 | 24750 | 26095 |
| 65 | 19536 | 20670 | 21804 |
| 70 | 16383 | 17340 | 18297 |
| 75 | 13788 | 14600 | 15422 |
| 80 | 11653 | 12350 | 13047 |
| 85 | 9890 | 10480 | 11080 |
| 90 | 8421 | 8930 | 9444 |
| 95 | 7197 | 7635 | 8076 |
| 100 | 6172 | 6551 | 6935 |

5. Filter Characteristics

| Filter F5.5 | | | | | |
|----------------------|----------------|-------|-----|-------|-----------------|
| Parameter | Limits | | | Units | Conditions |
| | Min | Typ | Max | | |
| average transmission | 70 | | | % | 7.5µm to 13.5µm |
| average transmission | | | 1 | % | visual to 5µm |
| cut on | 5.2 | 5.5 | 5.8 | µm | 25°C |
| filter thickness | | 0.525 | | | |
| filter material | silicon coated | | | | |

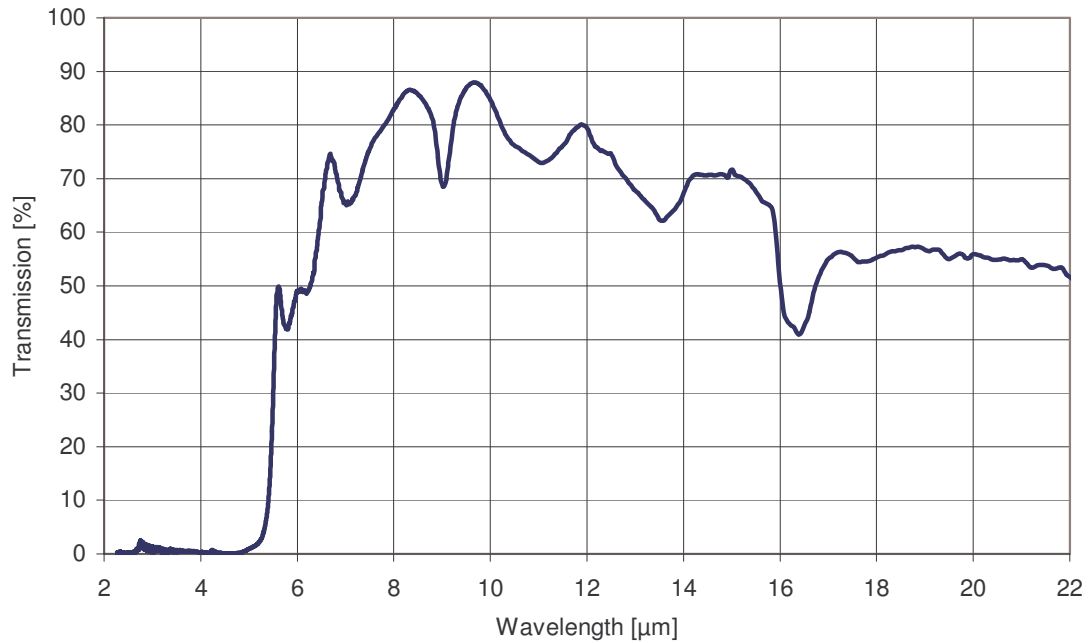

6. Drawing and Pin Assignment

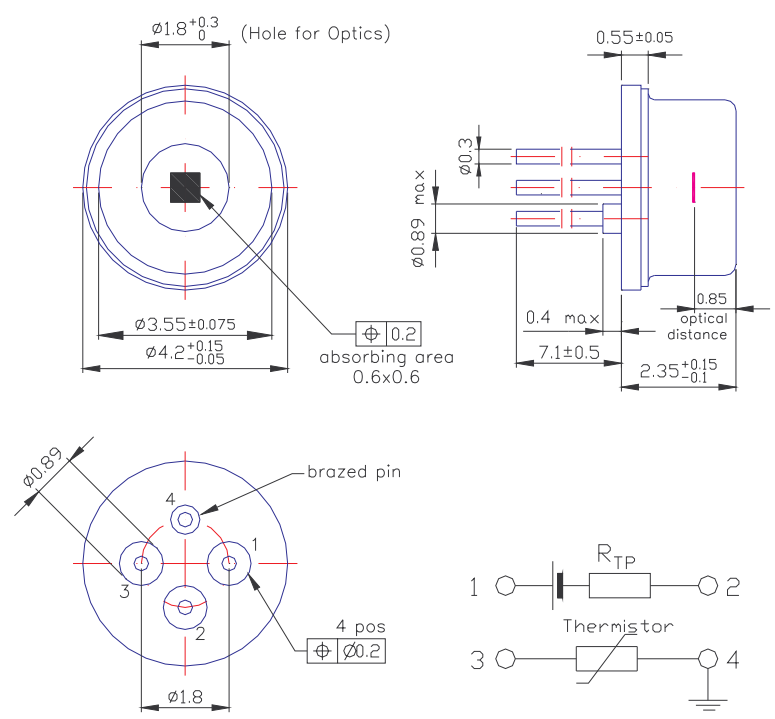


7. Packing

The thermopile sensors HMS Z11 F5.5 are packed in ESD save plastic packing tubes. Each packing tube contains 55 sensors and the tube ends are closed by soft rubber plugs. Two labels stick on each packing tube:



Main dimensions of packing tube

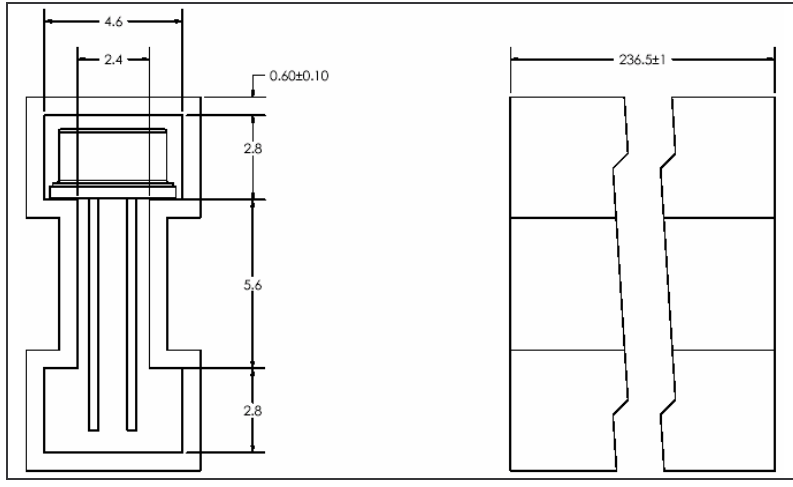

| | | |
|--------------------------------|-------------------------|---|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HMS Z11 F5.5 |
| Author(s): W. Leneke, M. Simon | Rev.: R 04 / 15.12.2008 | Page 7 of 7 |

8. General Directions for Further Processing

Stresses above the absolute maximum ratings may cause damages to the device. The sensor can be damaged by electrostatic discharges. Please take appropriate precautions for the handling.

Do not expose the sensors to aggressive detergents. Windows may be cleaned with alcohol and cotton swab.

Wave soldering may be applied by a maximum temperature of 280 °C for a dwell time less than 10s. For hand soldering the maximum applicable temperature is 350 °C for a dwell time less than 3s. The minimum distance between the housing body and the liquid solder should be for 280 °C at least 0.6mm and for 350 °C at least 1.5mm. Avoid heat exposure to the top and the window of the detector. Reflow soldering is not recommended.

9. Liability


Important product or process changes require a customer release. Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.



HTIA series with optics

Thermopile Modules for Temperature measurement

- Thermopile sensor with integrated ASIC for signal processing
- 2 analog outputs for thermopile and reference signal
- Simple linear reference function for external compensation
- Small size by COB technology
- Fast response time of 6 msec available
- Various optics and filter available



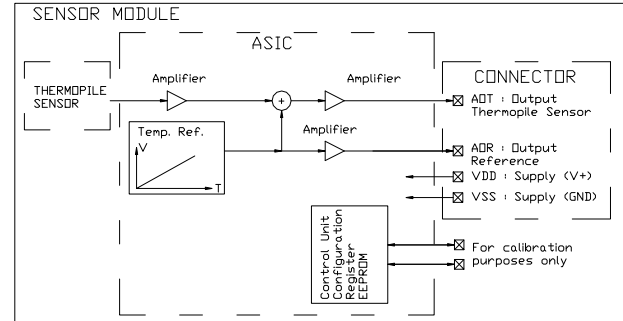


Ordering information for Modules:

Please specify:

- object temperature range
- ambient temperature range
- object (surface) emissivity
- required temperature accuracy and resolution
- required optics
- environmental conditions
- requested speed of response
- connector type and mounting

| Parameter | Typical Value | Unit | Condition |
|--------------------------|---------------------|-------|-----------------------|
| supply voltage | 5 | V | VDD |
| supply current | 1 | mA | without load |
| output voltage range | 0.3 ... (Vdd - 0.3) | V | |
| thermopile amplification | 500 ... 5000 | | |
| object temperature range | -30 ... +500 (max) | °C | object emissivity 90% |
| gradient temp. reference | 8 ... 18 | mV/°C | at AOR |
| response time | 6 ... 10 | ms | t/T = 63% |
| operating temperature | -20 to 120 | °C | |

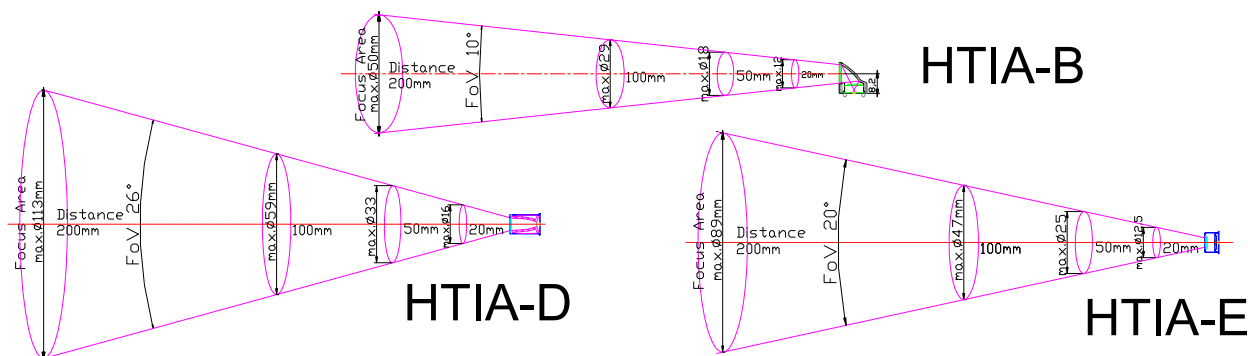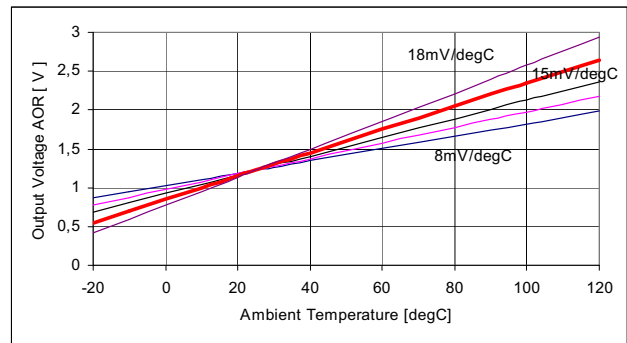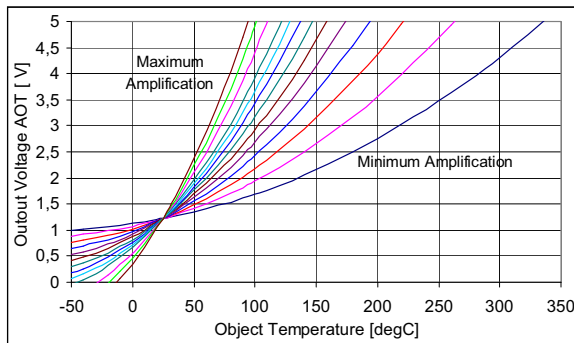

Modifications reserved Rev.07 / 05.10.2004



Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Features

The HEIMANN Sensor thermopile module is designed for the non-contact temperature measurement of surfaces based on infrared radiation. A self-designed application specific integrated circuit is used for the sensor signal processing. The module can be supplied with or without internal compensation of the sensor-typical, physical-based ambient temperature drift.

The HEIMANN Sensor thermopile module HTIA-type-To can be supplied for different object temperature ranges characterized by the detectable object temperature „To“. The “type” in the nomenclature describes the sizes, optics and filter characteristics of the different versions.

- Thermopile sensor with integrated ASIC for signal processing
- 2 analog outputs for thermopile and reference signal
- Simple linear reference function for external compensation
- Small size by COB technology
- Fast sensor response time of 5 msec
- Various optics and filter available

Characteristics

| Parameter | min/typ/max value | unit | condition |
|--------------------------|-----------------------------------|-------|-----------------------------------|
| supply voltage | 4.5 .. 5 .. 5.5 | V | VDD |
| supply current | 1 .. 1.4 .. 2 | mA | without load |
| output voltage range | 0.3 .. VDD-0.3 | V | |
| output resistance | < 10 | Ohm | $f < 100\text{Hz}$ |
| output load | > 20 | kOhm | for optimal operation |
| thermopile amplification | 150 .. 5500 | | |
| object temperature range | -30...+500 (1000) | °C | dep. on meas.conditions |
| gradient temp. reference | 10 .. 15 .. 16 | mV/°C | linear function w/ 1.225V at 25°C |
| response time | 4 .. 5 .. 10 | ms | $t/T=63\%$; sensor |
| transmission range | Typ. lwp cut on 5.5 (filter list) | µm | long wavelength pass (options) |
| operating temperature | -40 to 120 | °C | |

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com




Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Schematic

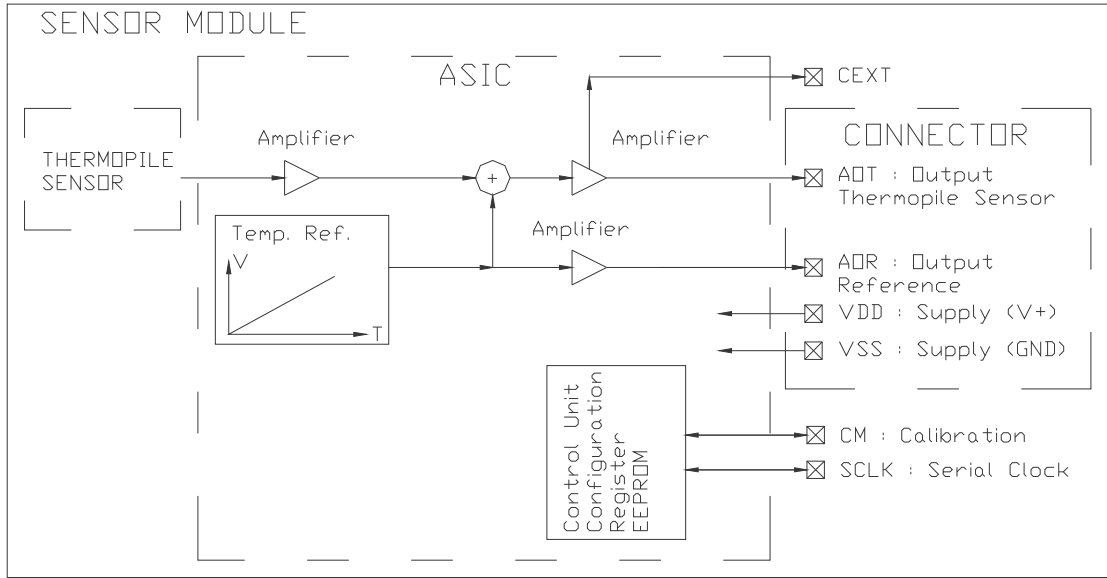

| <i>connect</i> | <i>description</i> |
|----------------|---|
| AOR | analog output – temperature reference (AORt) or voltage reference (AORv) / digital input – instructions, addresses, data |
| V+ | power supply – positive supply voltage |
| AOT | analog output – object temperature related output voltage - AOTc (amplified thermopile signal internal compensated by the temperature reference) - AOTu (amplified thermopile signal) / digital output - data |
| V- | power supply – negative supply voltage , ground |
| CM | calibration mode – selection between analog and digital mode |
| SCLK | serial clock input |
| <i>device</i> | <i>description</i> |
| Cap C1 | optional ; connected to V+ and V- |
| Cap C2 | optional ; connected to CEXT – low pass filter for the output AOT |

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com




Fast Response
Small Size




Datasheet HEIMANN Sensor Integrated Module HTIA

Sample Signal Characteristics Sensor Output AOT

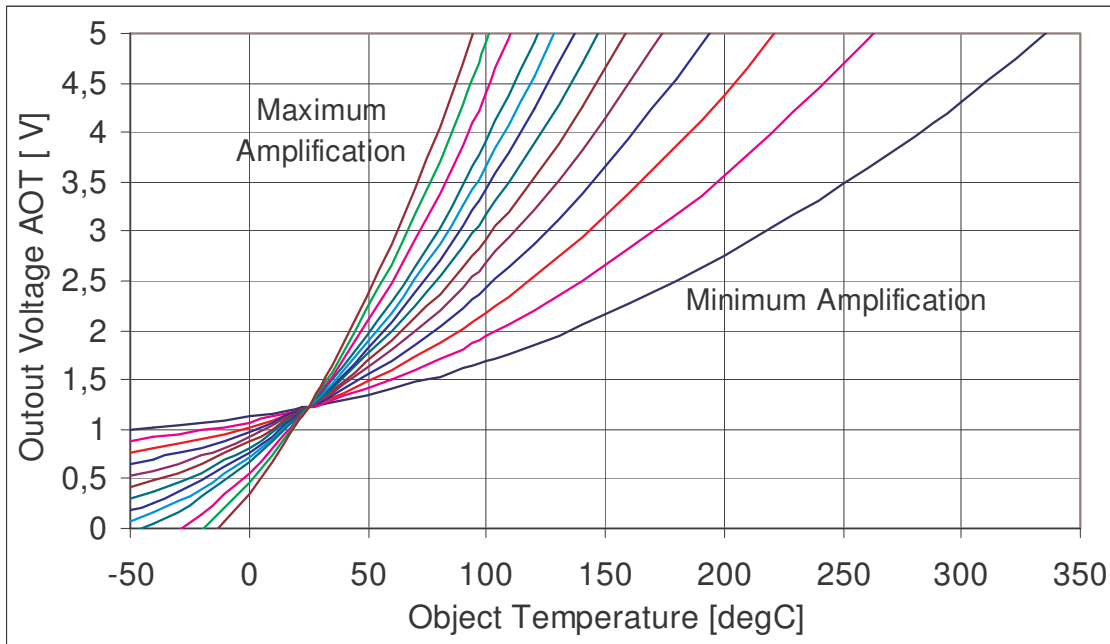

Sample Signal Characteristics Reference Output AOT

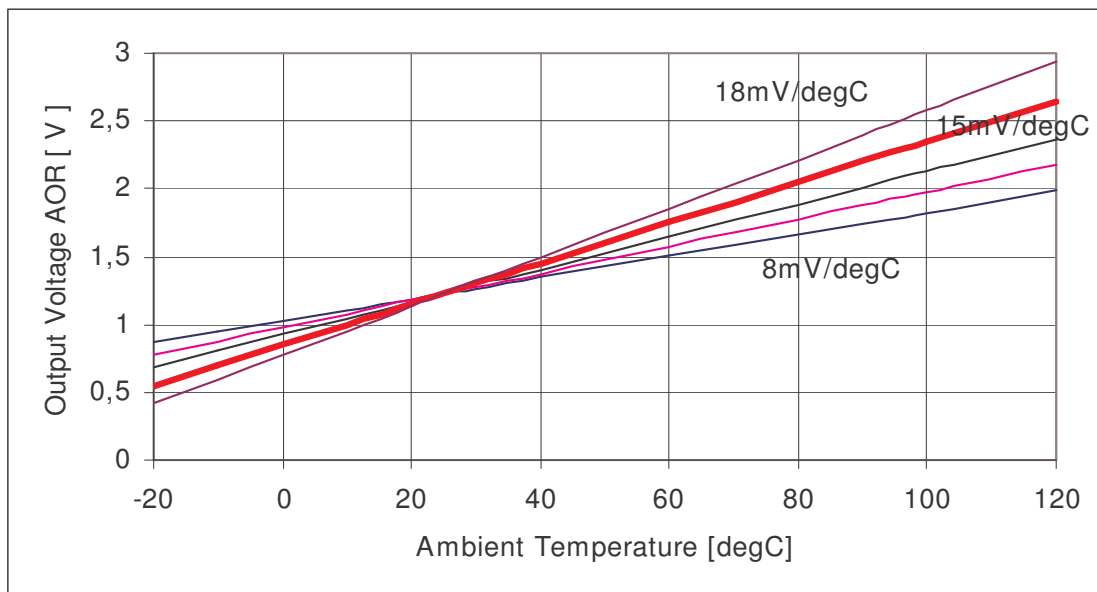

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Temperature Calculation and Compensation

The HEIMANN Sensor integrated module HTIA consists of a fast response thermopile sensor and an ASIC as specific integrated circuit for the signal processing and on chip calibration.

The thermopile sensor converts the temperature radiation of an object surface to an electrical signal (voltage) by thermocouples (Seebeck effect). The sensor output voltage is related to the object temperature and emissivity (radiation) as well as to the sensor chip temperature (housing temperature) and surrounding temperature (radiation) by the following equation :

$$VS = K * \varepsilon * (TON - TSn) \text{ at } TA=TS$$

VS -> sensor output voltage

K -> constant apparatus factor

ε -> object emissivity



TO -> object temperature

TA -> ambient (surrounding) temperature

TS -> sensor (housing) temperature

n -> exponent to describe the temperature dependency of the signal voltage

The equation is simplified by the hypothesis of equal ambient and sensor temperatures. The exponent „n“ has the theoretical value of „4“ based on physical laws. But in the application practice it is an empirically determined exponent value mostly in the range of 3 .. 4 . The knowledge of the housing temperature is necessary to get the right object temperature from the sensor voltage.

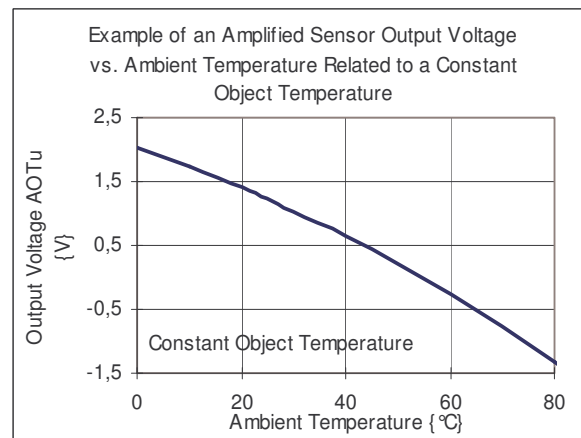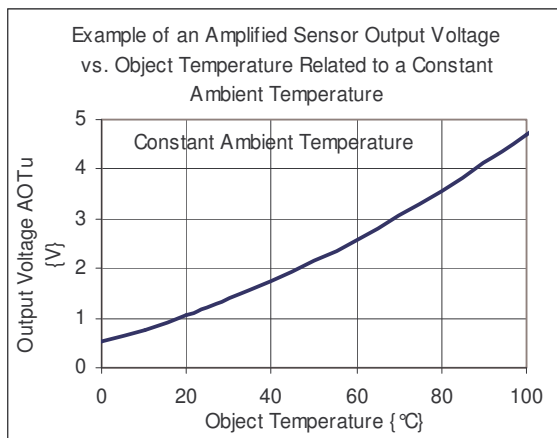

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size




Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Temperature Calculation and Compensation

The integrated sensor module HTIA is designed to detect the housing temperature and to convert the temperature to a voltage.

By the multi-functionality of the integrated sensor module HTIA it is possible to use that voltage for an internal (on chip) ambient temperature compensation which makes the output voltage of the sensor module widely independent from ambient temperature variations within a range of about 40° C. The achievable accuracy is shown in the picture.

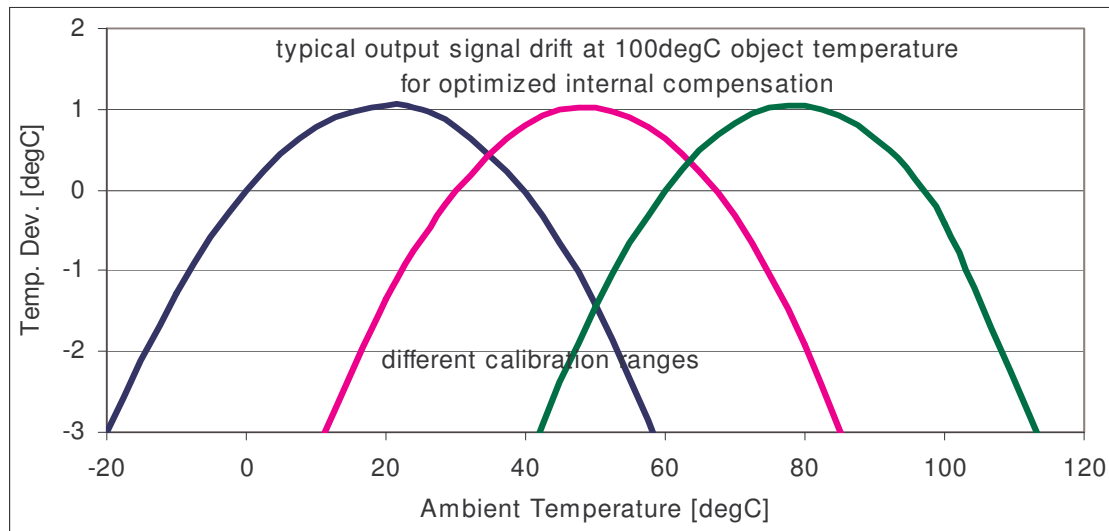

For higher accuracy requirements the multi-functional sensor module can output the amplified and calibrated sensor voltage separated from the linear on-chip temperature reference voltage. With it the ambient temperature compensation can be simply done combined with the object temperature calculation by the external microcontroller used in most applications. The following equations and procedures can be used for the calculation of the object temperature independent from the ambient temperature with sufficient accuracy for most applications.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Temperature Calculation and Compensation

Base Function

- Vobj (V): sensor object voltage
K : constant apparatus factor -> test certificate
 ε : emissivity of the object
Tobj (K): object temperature (Kelvin)
Tamb (K): sensor (ambient) temperature (Kelvin); The equation is simplified by the hypothesis of equal ambient Tamb and sensor temperatures Ts.
n: exponent, empirically determined, in sensor practice mostly in the range 3 to 4 -> test certificate

$$V_{obj} = K * \varepsilon * (T_{obj}^n - T_{amb}^n)$$

Tamb=Tsens

Experimental Determined Factors

In a first approximation the constant factor "K" and exponent "n" based on the Heimann Sensor measuring data can be used. In most cases an exponent of 4 is sufficient for the required temperature tolerance, which simplifies the calculation. The verification of the values is recommended by an application test.

$$K = \frac{V_{obj}}{\varepsilon * (T_{obj}^n - T_s^n)}$$

Function for Object Temperature Calculation with Temperature Compensation

$$T_{obj} = \sqrt[n]{\frac{V_{obj}}{K * \varepsilon} + T_s^n}$$

The uncompensated sensor output voltage $V(AOT_u)$, measured at the output AOT, is containing the object signal value V_{obj} and the reference voltage V_{ref} :

$$V_{obj} = V\{AOT_u\} - V_{ref}$$

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Temperature Calculation and Compensation

Internal temperature gradients generate additional offset voltages V_{offs} depending on application influences :

$$V_{obj} = V\{AOTu\} - V_{ref} + V_{offs}$$

The temperature generated offset can be determined by an output signal test at $T_{obj} = T_{amb}$.

Calculation of the ambient (sensor) temperature using the sensor output AOR :

$$T_s = 1/S_T * (V\{AORt\} - V\{AORt@25\}) + 298.15K$$

T_s : sensor temperature

S_T (V/K): temperature sensitivity of the internal temperature reference
-> test certificate

$V\{AORt\}$ (V): measured temperature output voltage at output AOR

$V\{AORt@25\}$ (V): temperature output voltage at 25° C (298.15K)
-> test certificate

For first tests the object temperature calculation can be done by the mentioned calculation procedure using an application factor and exponent derived from the Heimann Sensor sample data and based on Heimann Sensor test equipment. All test data are typical related to a defined emissivity of 100%. The emissivity variation can be considered by the factor ϵ .

Another ways for the object temperature calculation with ambient temperature compensation can be performed using look-up tables or polynomial regression equations.

But by the large number of physical affects influencing the non-contact temperature measurement, it is difficult to have the best initial adjustment for the different applications. In detail the measuring is influenced by the object emissivity and its variation, optical ratios (field of view, object size, measuring distances), the ambient and object temperature ranges, the adjustment of the ambient temperature compensation as well as unstable (dynamic) ambient temperature conditions. For that reason the object and ambient temperature to output voltage relation needs to be measured on application conditions.

For most applications an optimized solution can be found and fixed for a serial production. Don't hesitate to contact HEIMANN Sensor for support to use our long-time experience in infrared sensors and sensor modules.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size

HEIMANN
Sensor
HEIMANN SENSOR GMBH

Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Handling

Thermal stress to the sensor module can cause temporary measuring deviations. That deviations are generated by internal temperature differences in the sensor package. The sensor detects the temperature differences until the system is thermal stabilized. Recommended measures to reduce the influence of temperature stress to the output signal are

- to fix the sensor module at the printed circuit board only
- to thermal isolate the sensor package to the environment
- to place the sensor chip far from parasitic thermal sources

Stresses above the absolute maximum ratings may cause damages to the device. Precautions should be taken to avoid voltages 0.3V beyond the supply voltages to all inputs and outputs, which may result in latch-up effects (low impedance state with excessive currents). A limitation of the input current to maximum 5mA can avoid latch-up effects.

The allowed duration of output short circuits are indefinite. Continuous short-circuits to ground might cause permanent damage to the device.

Reversed polarity of power supply may result in a destroyed unit.

Do not expose the sensors to aggressive detergents.

Windows may be cleaned with alcohol and cotton swab.

Capacitive loads which are applied directly to the outputs reduce the loop stability margin. A resistive isolation should be used if larger load capacitances must be driven.

The module can be damaged by electrostatic discharges. Please take appropriate precautions for the handling.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size

HEIMANN
Sensor
HEIMANN SENSOR GMBH

Datasheet HEIMANN Sensor Integrated Module HTIA

Ordering Information

The sensor modules can be ordered by the following nomenclature :

HTIA-"type"+"U" or "C"-To , e.g. HTIA-DU-100

HTIA -> HEIMANN Sensor thermopile module with integrated circuit and analog outputs
type -> letter describing the size and optics according to the datasheet
"U" or "C" -> stands for separated or internal compensated output voltage AOT
To -> maximum object temperature describing the amplification adjustment
The long wavelength pass filter with 5.5µm cut on is used as standard filter type for all types.

Please give following information :

- object and ambient temperature ranges
- object (surface) emissivity
- required temperature accuracy and resolution
- required optics (field of view or object size and measuring distance)
- special environmental conditions
- requested speed of response
- different filter transmission

Don't hesitate to contact us , if the sensor modules show problems in your special application.

Liability Information


Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance.

Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com




HTS Series


Thermopile Sensors for Remote Temperature Measurement and Gas Analysis

The HTS Series of CMOS compatible thermopile sensor chips in a TO39 size transistor housing, features good sensitivity, small temperature coefficient of sensitivity and high reproducibility and reliability. The smallest chip TP1 is well suited for temperature measurements which require a precise measuring spot whereas the chip type TP3 is optimized for highest signal.

Additionally Heimann Sensor can offer integrated thermopile sensors (HIS series) combining a thermopile sensor chip with an ASIC in a TO39 housing.







$$R_{therm.ref}(T) = R_{25} \cdot e^{B \cdot \left(\frac{1}{T} - \frac{1}{T_{25}} \right)}$$




Ordering Information:
HTS / cap aperture / chip type /
w/wo thermistor / F desired filter
e.g.: HTS A11 F5.5

| Parameter | HTS A11 | HTS B21 C21 | HTS B31 C31 | Unit |
|---|---------------------|---------------------|---------------------|--------------------------|
| element size | 0,61 ² | 1,2 ² | 2,1 ² | mm ² |
| voltage response ¹ | 13 | 39 | 74 | V mm ² /W |
| sensitivity ¹ | 36 | 27 | 16 | V/W |
| resistance R _{TP} ² | 86 | 84 | 88 | kOhm |
| TC of resistance R _{TP} ² | 0.02 | 0.02 | 0.02 | % / K |
| noise ² | 38 | 37 | 38 | nV/ Hz ^{1/2} |
| detectivity ^{1,2} | 5.6 10 ⁷ | 8.7 10 ⁷ | 9.1 10 ⁷ | cm Hz ^{1/2} / W |
| time constant | 6 | 10 | 18 | ms |
| thermistor reference ² | 100 | 100 | 100 | kOhm |
| temp. coeff. of thermistor B ³ | 3940 | 3940 | 3940 | K |
| field of view ⁴ | 70 | 100 | 100 | ° |
| operating temperature | -20 ... 120 | | | °C |
| storage temperature | -40 ... 120 | | | °C |


- 1) filter type F5.5, Tobj=100°C, DC
- 2) at Tamb=25°C
- 3) 25°C, 50°C
- 4) deg at 50% signal level

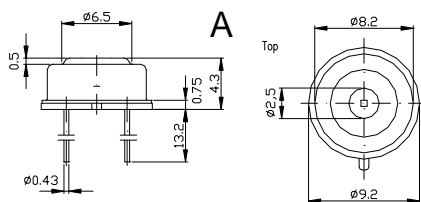

Filter types for temperature measurements

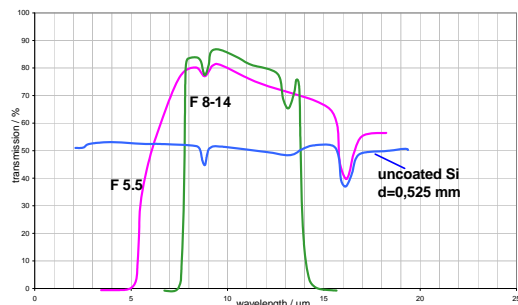

Filter types for Gas Analysis

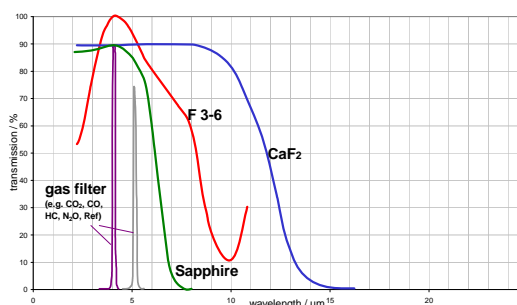

Modifications reserved Rev.07 / 01.10.2004

| | | |
|--------------------------------|-------------------------|---|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HTS A10 F8-14-HT |
| Author(s): W. Leneke, M. Simon | Rev.: R 01 / 14.05.2008 | Page 1 of 4 |

Specification Thermopile Sensor (preliminary)
HTS A10 F8-14-HT
Part No. 1050

R 01

Author(s):

W. Leneke, M. Simon

Revision History

| Version | Date | Remarks |
|---------|------------|------------------------------|
| R 01 | 14.05.2008 | Draft of HEIMANN Sensor GmbH |
| | | |
| | | |
| | | |
| | | |
| | | |

TABLE OF CONTENTS

| | |
|---|----------|
| 1. Purpose, Scope | 2 |
| 2. Absolute Maximum Ratings | 2 |
| 3. General and Electrical Parameter Thermopile | 2 |
| 4. Filter Characteristics | 3 |
| 5. Drawing and Pin Assignment | 4 |
| 6. General Directions for Further Processing | 4 |
| 7. Liability | 4 |

1. Purpose, Scope

The new thermopile infrared sensor from Heimann Sensor, comprising a new type CMOS compatible sensor chip plus a thermistor reference chip, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The sensor meets the requirements of the European Union RoHS (Regulation of Hazardous Substances) Directive.

The sensor will be available in a standard transistor outline package, equipped with an IR transmitting filter window (transmission curve as shown below).

2. Absolute Maximum Ratings

| <i>Parameter</i> | <i>Symbol</i> | <i>Limits</i> | | | <i>Units</i> | <i>Conditions</i> |
|-----------------------|---------------|---------------|-------------|------------|--------------|-------------------|
| | | <i>Min</i> | <i>Typ.</i> | <i>Max</i> | | |
| storage temperature | | -40 | | 185 | °C | |
| operating temperature | | -20 | | 180 | °C | |


3. General and Electrical Parameter Thermopile

| <i>Parameter</i> | <i>Symbol</i> | <i>Limits</i> | | | <i>Units</i> | <i>Conditions</i> |
|------------------|------------------|---------------|---------------------|------------|-----------------|---|
| | | <i>Min</i> | <i>Typ.</i> | <i>Max</i> | | |
| filling gas | | | | | | dry nitrogen |
| element size | | | 0.6*0.6 | | mm ² | absorbing area |
| field of view | | | 75 | | | degree |
| resistance | R _{TS} | 69 | 86 | 112 | kΩ | -40°C to 185°C |
| signal voltage | V _S | | 600 | | μV | Filter F8–14 μm, T _{BB} 100°C, f = 4.5 Hz |
| time constant | τ | | 15 | | ms | t ₉₀ |
| noise voltage | V _{RMS} | | 38 | | nV/√Hz | r.m.s., 25°C |
| detectivity | D* | | 2.9*10 ⁷ | | cm√Hz/W | Filter F8–14 μm |


4. Filter Characteristics

| Filter F8-14 | | | | | |
|----------------------|----------------|-------|------|-------|------------------------------|
| Parameter | Limits | | | Units | Conditions |
| | Min | Typ | Max | | |
| average transmission | 75 | | | % | 9µm to 13µm |
| average transmission | | | 1 | % | visual to pass, pass to 20µm |
| half power point on | 7.8 | 8 | 8.2 | µm | 25°C |
| Half power point off | 13.5 | 14 | 14.5 | µm | 25°C |
| filter thickness | | 0.525 | | | |
| filter material | coated silicon | | | | |

Typical Transmission 8µm to 14µm Filter

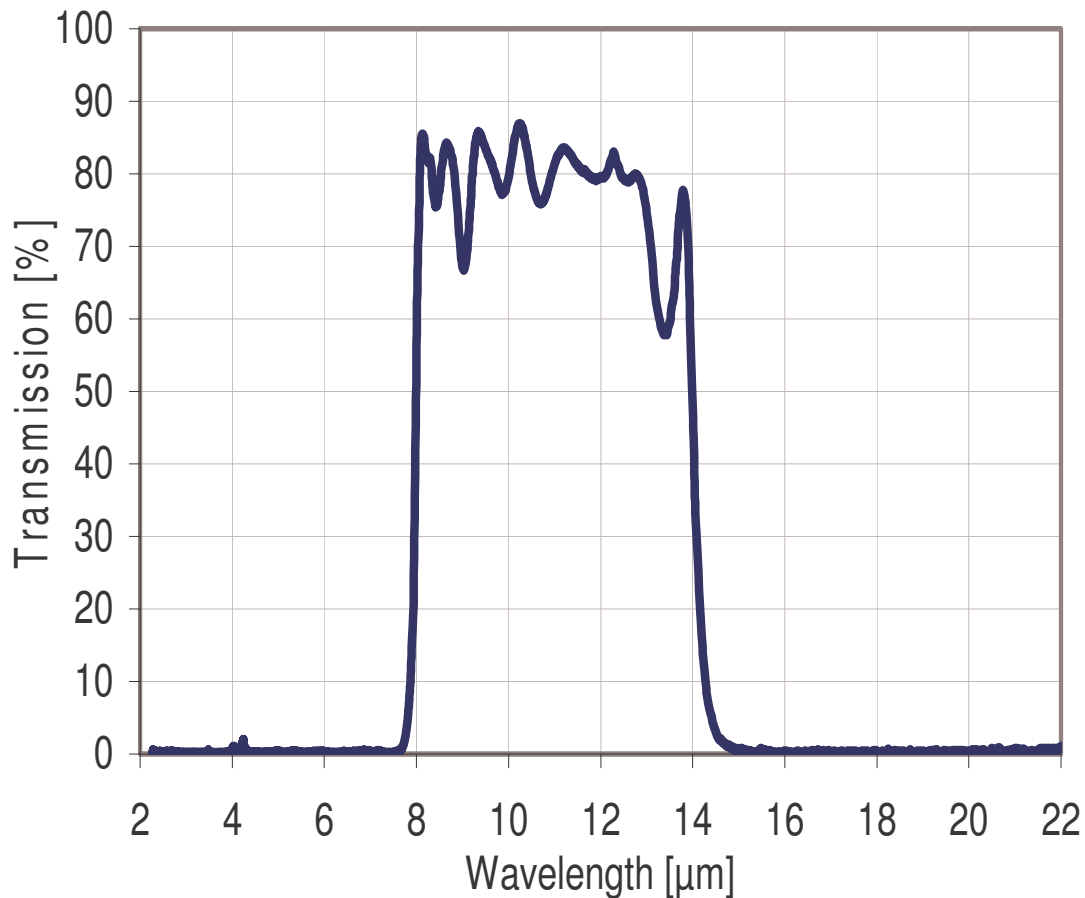

5. Drawing and Pin Assignment

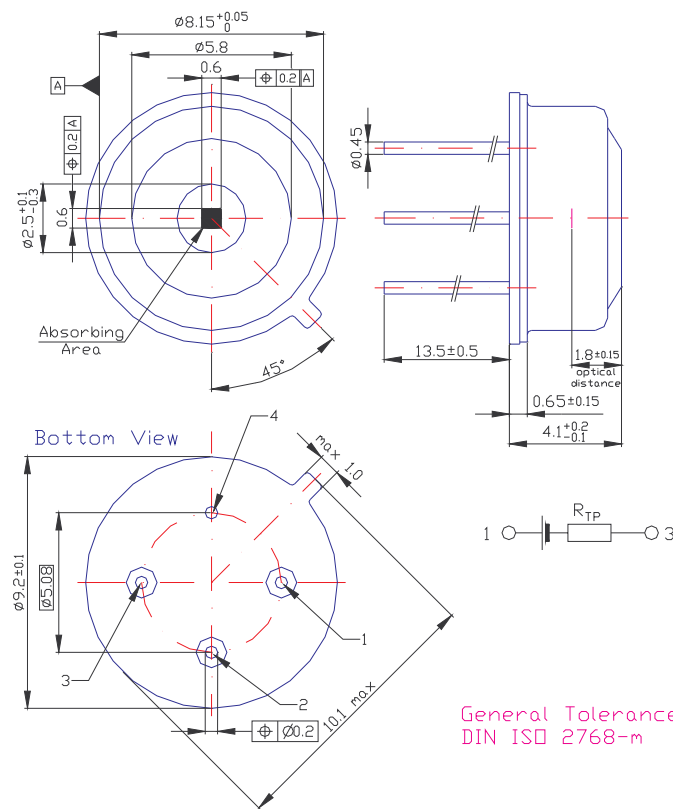

General Tolerances:
DIN ISO 2768-m

6. General Directions for Further Processing

Stresses above the absolute maximum ratings may cause damages to the device. The sensor can be damaged by electrostatic discharges. Please take appropriate precautions for the handling.

Do not expose the sensors to aggressive detergents. Windows may be cleaned with alcohol and cotton swab.

For hand soldering the maximum applicable temperature is 215°C for a dwell time less than 10s.

Any temperature above 215°C will lead to an irreversible damage of the thermopile sensor.

Avoid heat exposure to the top and the window of the detector. Reflow and wave soldering is not recommended.

7. Liability


Important product or process changes require a customer release. Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.



HTS i e S e n s o r

Thermopile Sensor for Gas Analysis




The HTS Multichannel Sensors comprise two or four independent sensor chips for a multichannel gas concentration measurement. Typically one to three of the optical channels contain a gas specific filter window and the other channel, equipped with a filter with center wavelength where no gas absorption occurs, serves as reference. Of course we can also provide Multichannel Sensors with customer filters (thickness should be close to 0.5 mm).

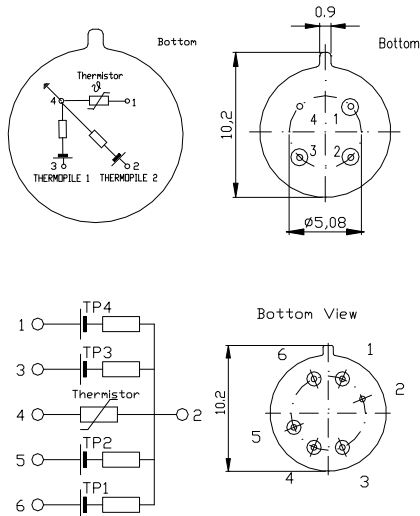

| Parameter | HTS Q21 | HTS E21 | HTS E31 | Unit |
|---|---------------------|---------------------|---------------------|--------------------------|
| number of channels | 4 | 2 | 2 | |
| element size | 1,2 ² | 1,2 ² | 2,1 ² | mm ² |
| voltage response ¹ | 125 | 125 | 237 | V mm ² /W |
| sensitivity ¹ | 86 | 86 | 51 | V/W |
| resistance R _{TP} ² | 84 | 84 | 88 | k Ohm |
| TC of resistance R _{TP} ² | 0.02 | 0.02 | 0.02 | % / K |
| noise ² | 37 | 37 | 38 | nV/ Hz ^{1/2} |
| detectivity ^{1,2} | 2.7 10 ⁸ | 2.7 10 ⁸ | 2.9 10 ⁸ | cm Hz ^{1/2} / W |
| time constant | 10 | 10 | 18 | ms |
| thermistor reference ² | 100 | 100 | 100 | kOhm |
| temp. coeff. of thermistor B ³ | 3940 | 3940 | 3940 | K |
| operating temperature | | -20..120 | | °C |
| storage temperature | | -40..120 | | °C |

1) without filter, T_{obj}=500°C, DC
 2) at T_{amb}=25°C
 3) 25°C, 50°C

Ordering Information:
 HTS / package type / chip type /
 w/wo thermistor / F desired filters
 e.g.: HTS 21 F4.0 / F4.26

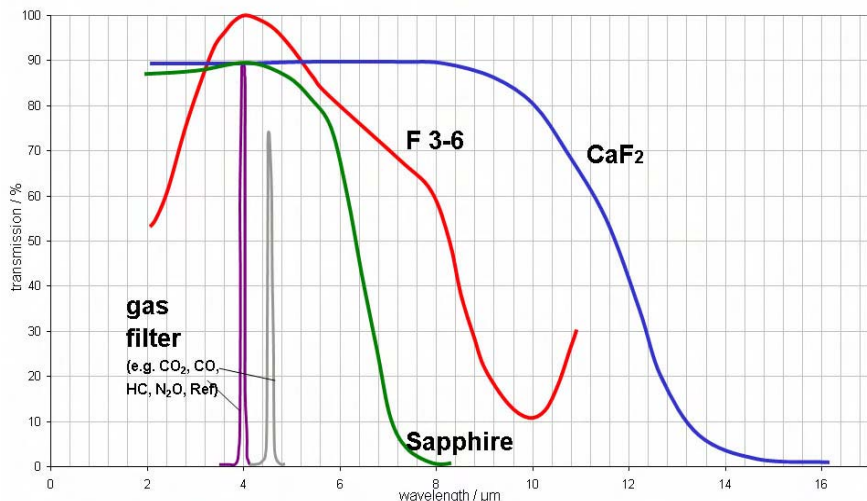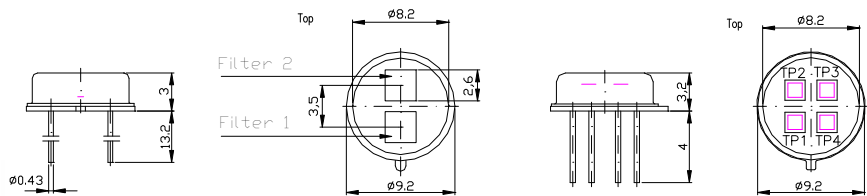

Please contact Heimann Sensor also for

- IR lamps,
- light concentrators or
- high precision broad-band IR sources.

Modifications reserved Rev.08 / 01.10.2004

| | | |
|--|--------------------------|--|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26 |
| Author(s): W. Leneke, J. Schieferdecker | Rev.: R 0.1 / 04.08.2005 | Page 1 of 6 |

Specification Thermopile Sensor HTS-E21-F3.91/F4.26

R 0.1

Author(s):

W. Leneke, M. Simon

Revision History

| Version | Date | Remarks |
|---------|------------|---------------------------------|
| R 0.1 | 04.08.2005 | 1. Draft of HEIMANN Sensor GmbH |
| | | |
| | | |
| | | |

| | | |
|--|--------------------------|--|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26 |
| Author(s): W. Leneke, J. Schieferdecker | Rev.: R 0.1 / 04.08.2005 | Page 2 of 6 |

1. Purpose, Scope

The new thermopile infrared sensor from Heimann Sensor, comprising a new type CMOS compatible sensor chip plus a thermistor reference chip, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability.

The sensor will be available in standard transistor outline packages in different sizes, equipped with an IR transmitting filter window (transmission curve as shown below).

2. Absolute Maximum Ratings

| Parameter | Symbol | Limits | | | Units | Conditions |
|-----------------------|--------|--------|------|-----|-------|------------|
| | | Min | Typ. | Max | | |
| storage temperature | | -40 | | 120 | °C | |
| operating temperature | | -20 | | 120 | °C | |

3. General and Electrical Parameter Thermopile

| Parameter | Symbol | Limits | | | Units | Conditions |
|--------------------------------|------------------|--------|---------|-----|-----------------|--|
| | | Min | Typ. | Max | | |
| element size | | | 1.2*1.2 | | mm ² | absorbing area |
| resistance | R _{TP} | 69 | 84 | 112 | kΩ | -40°C to 100°C |
| TC of resistance | | | 0.02 | | %/K | 25°C |
| signal voltage channel 3.9 | V _S | 60 | 90 | 115 | μV | Heimann Sensor test set-up "F1": IR source, 6V, 3Hz, distance 15mm |
| signal voltage channel 4.26 | V _S | 95 | 120 | 145 | μV | Heimann Sensor test set-up "F1": IR source, 6V, 3Hz, distance 15mm |
| noise voltage | V _{RMS} | | 37 | | nV/√Hz | r.m.s., 25°C |
| time constant | τ | | 10 | 13 | ms | |

| | | |
|--|--------------------------|--|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26 |
| Author(s): W. Leneke, J. Schieferdecker | Rev.: R 0.1 / 04.08.2005 | Page 3 of 6 |

4. General and Electrical Parameter Thermistor

| Type | Thermistor 100k Ω | | | | | |
|------------|--------------------------|--------|------|------|------------|------------|
| Parameter | Symbol | Limits | | | Units | Conditions |
| | | Min | Typ. | Max | | |
| resistance | R _{TH} | 95 | 100 | 105 | k Ω | 25°C |
| BETA-value | β | 3900 | 3940 | 3980 | K | 25°C/50°C |


| T / °C | Rth_min / Ohm | Rth_nom / Ohm | Rth_max / Ohm |
|--------|---------------|---------------|---------------|
| -30 | 1557900 | 1655000 | 1753100 |
| -25 | 1163320 | 1234000 | 1306680 |
| -20 | 875826 | 928700 | 981974 |
| -15 | 665010 | 704500 | 744190 |
| -10 | 508730 | 538500 | 568370 |
| -5 | 392108 | 414600 | 437292 |
| 0 | 304466 | 321700 | 338934 |
| 5 | 238072 | 251400 | 264728 |
| 10 | 187444 | 197800 | 208056 |
| 15 | 148568 | 156600 | 164632 |
| 20 | 118404 | 124800 | 131096 |
| 25 | 95000 | 100000 | 105000 |
| 30 | 76537 | 80630 | 84713 |
| 35 | 62032 | 65380 | 68738 |
| 40 | 50543 | 53310 | 56077 |
| 45 | 41386 | 43680 | 45984 |
| 50 | 34070 | 35980 | 37890 |
| 55 | 28174 | 29770 | 31366 |
| 60 | 23405 | 24750 | 26095 |
| 65 | 19536 | 20670 | 21804 |
| 70 | 16383 | 17340 | 18297 |
| 75 | 13788 | 14600 | 15422 |
| 80 | 11653 | 12350 | 13047 |
| 85 | 9890 | 10480 | 11080 |
| 90 | 8421 | 8930 | 9444 |
| 95 | 7197 | 7635 | 8076 |
| 100 | 6172 | 6551 | 6935 |

| | | |
|--|--------------------------|--|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26 |
| Author(s): W. Leneke, J. Schieferdecker | Rev.: R 0.1 / 04.08.2005 | Page 4 of 6 |

5. Filter Characteristics


| Filter F3.91 | | | | | |
|----------------------------|---------------|------------------------------|------------|--------------|------------------------|
| Parameter | Limits | | | Units | Conditions |
| | <i>Min</i> | <i>Typ.</i> | <i>Max</i> | | |
| Center wavelength (CWL) | 3.87 | 3.91 | 3.95 | µm | |
| Half power bandwidth (HPB) | 70 | 90 | 110 | nm | |
| HPB/CWL | | 2.3 | | % | |
| Peak transmittance | 76 | | | % | |
| Blocking | | $T_{\text{average}} < 0.1\%$ | | % | from UV to band pass |
| | | $T_{\text{peak}} < 1\%$ | | % | from UV to band pass |
| | | $T_{\text{peak}} < 1\%$ | | % | from band pass to 12µm |

| Filter F4.26 | | | | | |
|----------------------------|---------------|------------------------------|------------|--------------|------------------------|
| Parameter | Limits | | | Units | Conditions |
| | <i>Min</i> | <i>Typ.</i> | <i>Max</i> | | |
| Center wavelength (CWL) | 4.05 | 4.26 | 4.51 | µm | |
| Half power bandwidth (HPB) | 160 | 180 | 200 | nm | |
| HPB/CWL | | 4.2 | | % | |
| Peak transmittance | 73 | | | % | |
| Blocking | | $T_{\text{average}} < 0.1\%$ | | % | from UV to band pass |
| | | $T_{\text{peak}} < 1\%$ | | % | from UV to band pass |
| | | $T_{\text{peak}} < 1\%$ | | % | from band pass to 12µm |

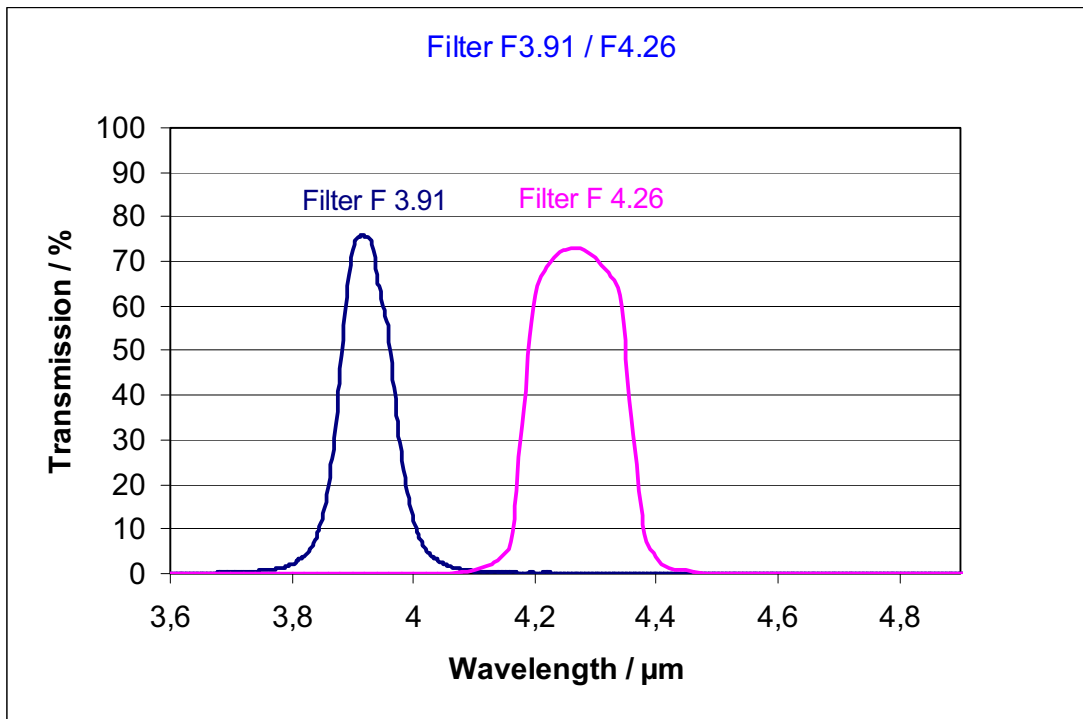

| | | |
|--|--------------------------|---|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26 |
| Author(s): W. Leneke, J. Schieferdecker | Rev.: R 0.1 / 04.08.2005 | Page 6 of 6 |

6. Drawing and Pin Assignment

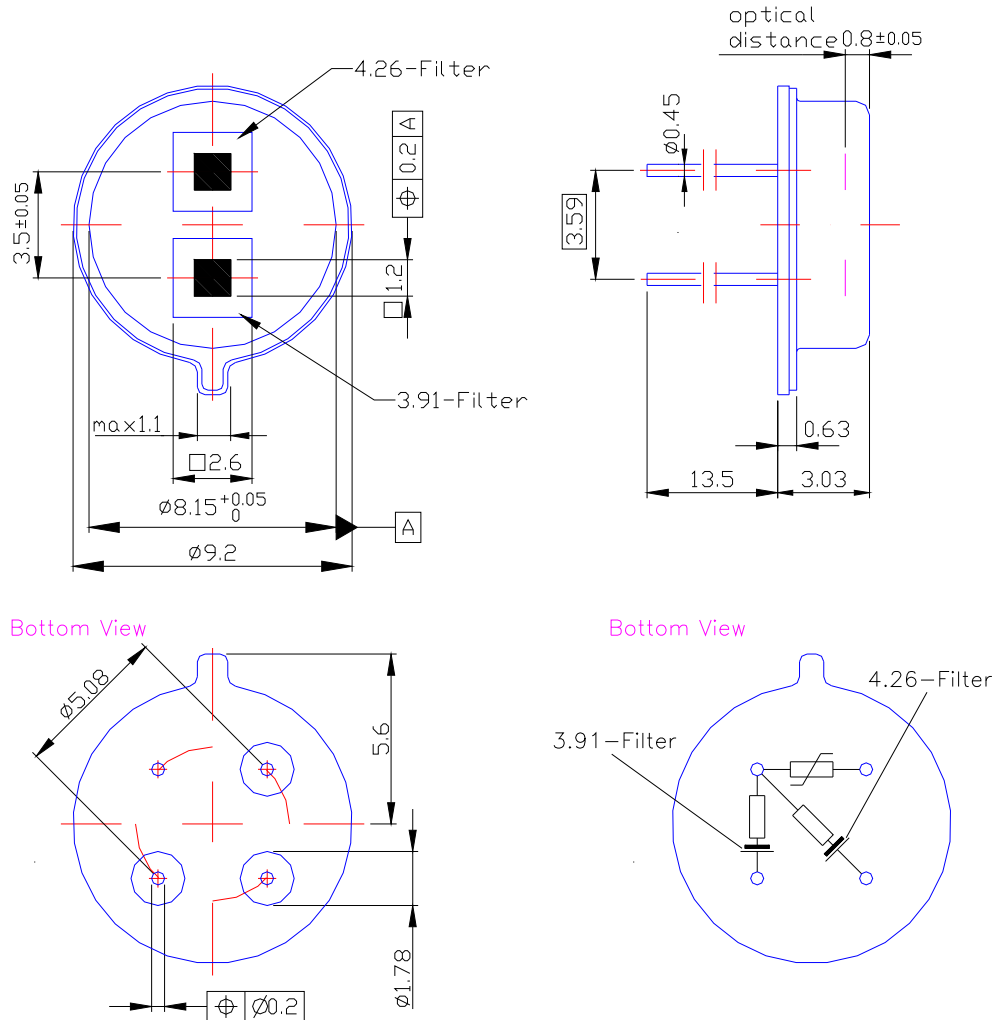

7. Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

| | | |
|--------------------------------|-------------------------|---|
| HEIMANN Sensor GmbH | | Product Specification: Thermopile Sensor HTS A10 F8-14-HT |
| Author(s): W. Leneke, M. Simon | Rev.: R 01 / 14.05.2008 | Page 1 of 4 |

Specification Thermopile Sensor (preliminary)
HTS A10 F8-14-HT
Part No. 1050

R 01

Author(s):

W. Leneke, M. Simon

Revision History

| Version | Date | Remarks |
|---------|------------|------------------------------|
| R 01 | 14.05.2008 | Draft of HEIMANN Sensor GmbH |
| | | |
| | | |
| | | |
| | | |
| | | |

TABLE OF CONTENTS

| | |
|---|----------|
| 1. Purpose, Scope | 2 |
| 2. Absolute Maximum Ratings | 2 |
| 3. General and Electrical Parameter Thermopile | 2 |
| 4. Filter Characteristics..... | 3 |
| 5. Drawing and Pin Assignment..... | 4 |
| 6. General Directions for Further Processing | 4 |
| 7. Liability..... | 4 |

1. Purpose, Scope

The new thermopile infrared sensor from Heimann Sensor, comprising a new type CMOS compatible sensor chip plus a thermistor reference chip, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The sensor meets the requirements of the European Union RoHS (Regulation of Hazardous Substances) Directive.

The sensor will be available in a standard transistor outline package, equipped with an IR transmitting filter window (transmission curve as shown below).

2. Absolute Maximum Ratings

| Parameter | Symbol | Limits | | | Units | Conditions |
|-----------------------|--------|--------|------|-----|-------|------------|
| | | Min | Typ. | Max | | |
| storage temperature | | -40 | | 185 | °C | |
| operating temperature | | -20 | | 180 | °C | |


3. General and Electrical Parameter Thermopile

| Parameter | Symbol | Limits | | | Units | Conditions |
|----------------|------------------|--------|---------------------|-----|-----------------|---|
| | | Min | Typ. | Max | | |
| filling gas | | | | | | dry nitrogen |
| element size | | | 0.6*0.6 | | mm ² | absorbing area |
| field of view | | | 75 | | | degree |
| resistance | R _{TS} | 69 | 86 | 112 | kΩ | -40°C to 185°C |
| signal voltage | V _S | | 600 | | μV | Filter F8–14 μm, T _{BB} 100°C, f = 4.5 Hz |
| time constant | τ | | 15 | | ms | t90 |
| noise voltage | V _{RMS} | | 38 | | nV/√Hz | r.m.s., 25°C |
| detectivity | D* | | 2.9*10 ⁷ | | cm√Hz/W | Filter F8–14 μm |


4. Filter Characteristics

| Filter F8-14 | | | | | |
|----------------------|----------------|-------|------|-------|------------------------------|
| Parameter | Limits | | | Units | Conditions |
| | Min | Typ | Max | | |
| average transmission | 75 | | | % | 9μm to 13μm |
| average transmission | | | 1 | % | visual to pass, pass to 20μm |
| half power point on | 7.8 | 8 | 8.2 | μm | 25°C |
| Half power point off | 13.5 | 14 | 14.5 | μm | 25°C |
| filter thickness | | 0.525 | | | |
| filter material | coated silicon | | | | |

Typical Transmission 8μm to 14μm Filter

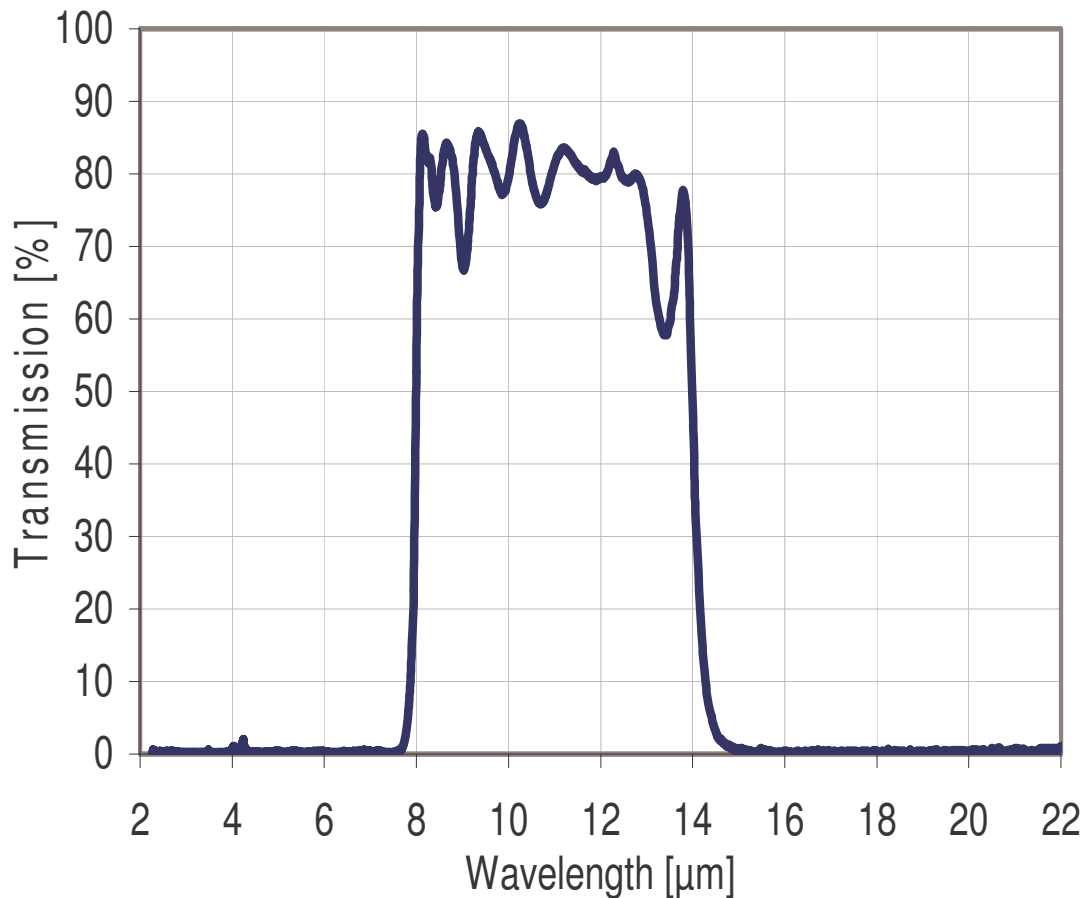

5. Drawing and Pin Assignment

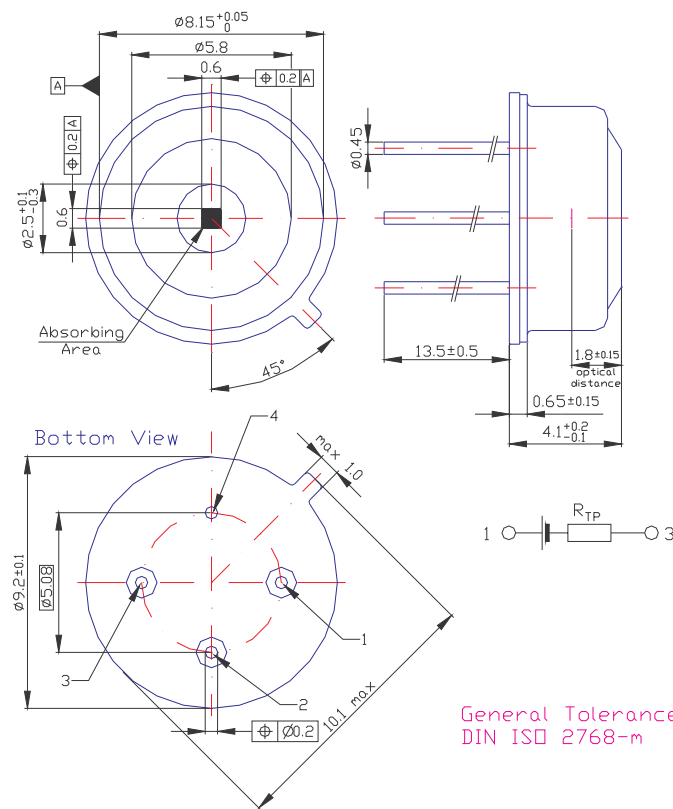

6. General Directions for Further Processing

Stresses above the absolute maximum ratings may cause damages to the device. The sensor can be damaged by electrostatic discharges. Please take appropriate precautions for the handling.

Do not expose the sensors to aggressive detergents. Windows may be cleaned with alcohol and cotton swab.

For hand soldering the maximum applicable temperature is 215 °C for a dwell time less than 10s.

Any temperature above 215 °C will lead to an irreversible damage of the thermopile sensor.

Avoid heat exposure to the top and the window of the detector. Reflow and wave soldering is not recommended.

7. Liability

Important product or process changes require a customer release. Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.