



Thermopiles for
temperature measurement
and gas detection



HEIMANN
Sensor

91 Boylston Street, Brookline, MA 02445
www.boselec.com | boselec@boselec.com
617-566-3821

Heimann Thermopiles - how to select

Need to decide on **ACTIVE AREA, NUMBER OF ELEMENTS, PACKAGE, AND FILTER/WINDOW.**
OPTIONALLY add **AMPLIFICATION** (inside package or outside) and **OPTICS** (lens, mirror)

Active Area		4 standard active areas are available.			
CODE >>	1	2	3	1C	
AREA mm ² (rectangular)	0.61x0.61	1.2x1.2	2.1x2.1	0.85x0.85	
Chips	small, low cost	large, high signal	largest, higher signal, higher cost	midsize	
	used for temp sensing usually	used for gas sensing usually	used for gas sensing usually	temp or gas	
Active area = area of highest absorption. Heimann's main advantage over competitors is small thermal time constant. The heat capacity of Heimann elements is small, which makes them fast.					
Number of elements	single, dual and quad are standard. 3x3, 1x8 and 1x16 available as engineering samples				
Thermistors	CODE: second digit	n 1 = 100 kOhm thermistor; n 2 = 30 kOhm thermistor			


Spectral Response		A variety of filters are stocked	
Filters are chosen depending on the application			
Application	Filter		
Temp measurement, short distance to target	5.5 micron LWP		
Temp measurement, when distance to target makes atmospheric absorption significant	8 to 14 micron BP		
Gas sensing	Gas	filter ctr_wl/HPBW (standard)	Also Available
	CO2	4.26/0.18 or 0.09	4.43/0.06 (band edge)
	CO	4.64/0.18	and per customer specification
	HC	3.4/0.19	
	Reference	3.91/0.09	
	others	customer specified	
uncoated windows	uncoated Si, CaF, sapphire - yet might not always be in stock for all window sizes		

Sensor Packages				
	Code	Type	Comment	
Packages	HCM	C	Surface mount with ASIC	
	HID	E	TO-39 with ASIC and Digital Output Voltage	
	HIM	J	TO-46 with ASIC	
	HIS	various	TO-39 with ASIC	
	HTS	A	TO-5 (TO-39)	2.5 mm dia aperture
	HTS	B		3.8 mm dia aperture
	HTS	C		3.5x3.5 mm aperture; not encouraged
	HTS	D		customized product
	HTS	I		internal FOV aperture
	HTS	E		Dual aperture
	HTS	Q		Quad aperture
	HMS	M		TO-18 (TO-46)
	HMS	J / K	TO-18 (TO-46) Mini	J with tab, K no tab, "1" or "1C" or 2 chip only
	HMS	Z	Baby	no tab, "1" chip only

Sensor Modules with electronics		customers can get the timing and protocol requirements for re-programming	
	Code		
Electronics	HTIA (typical application is temp measurement)	PCB type with chip-on-board , TO39 cap	Analog single channel ASIC with EEPROM adjusted to customer requirements
		B	external mirror optics
		C	cap aperture 2.5mm dia , filter type typ. F5.5
		D	internal mirror optics , typ. F5.5
		E	lens optics focal length 4.4mm, typ. F5.5
HIS 6PIN (typical application is temp of gas measurement)		TO39 housing	Single channel ASIC with EEPROM adjusted to customer requirements
		C	cap aperture 2.5mm dia , filter type typ. F5.5
		E	lens optics focal length 3mm or 4.4mm
HIS 4PIN (typical application is gas measurement)		TO39 housing	Single channel ASIC with EEPROM max. amplification pref. for gas detection
		A	cap aperture 2.5mm dia , filter type typically gas , typically chip type 2



Integrated Sensor For NDIR Gas Detection

- Thermopile single sensor with integrated ASIC
- 2 analog outputs for amplified thermopile and reference signal
- Simple linear reference function for external compensation
- TO-5 or TO-18 metal housing with 4 connections
- Fast sensor response time of 8 msec typical
- Various types equipped with different filters available
- Gas types for NDIR gas detection CO₂, CO, NO_x, HC, (H₂O)
- IR-Lamp or broadband IR-Source available

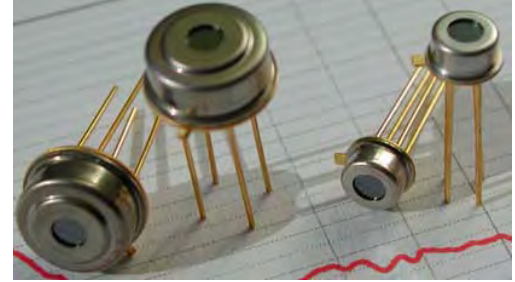


Parameter	Typ. Value ASIC 1	Typ. Value ASIC 2	Unit	Condition
supply voltage	5	3 or 5	V	VDD
supply current	1.7	1	mA	without load
output voltage range	0.3 .. VDD-0.3	0.3 .. VDD-0.3	V	
output load	> 20	> 20	kOhm	for optimal operation
thermopile amplification	5500	4000	V/V	
gradient temp. reference	15	15	mV/°C	linear ; 1.225V at 25°C
response time	8	8	ms	t / T = 63% ; sensor
transmission range	filter list	filter list	µm	narrow band pass
sensor housing	TO-5	TO-5 or TO-18		
operating temperature	-40 to 120	-40 to 120	°C	

Measuring Principle

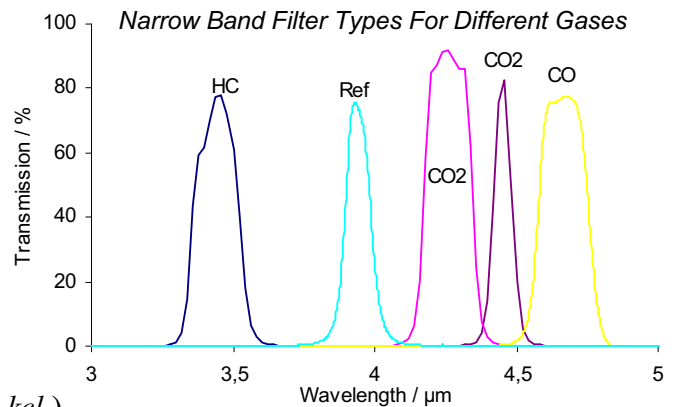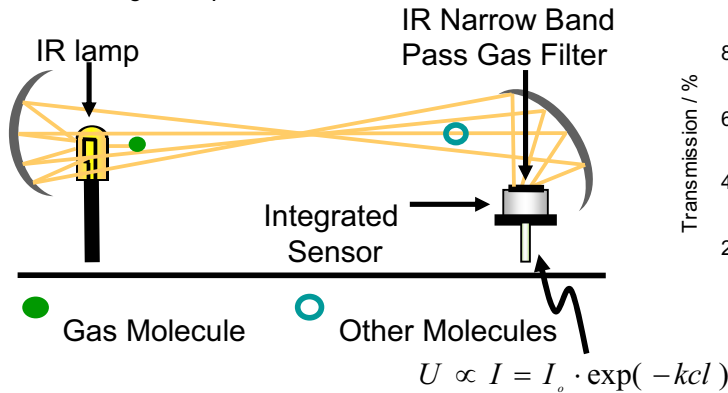


Schematic

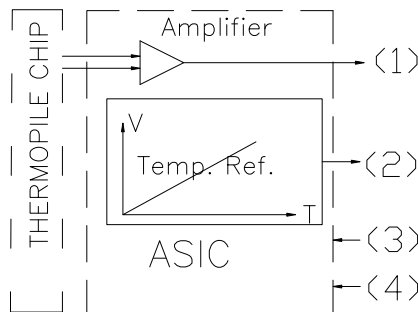

Pin Assignment


- (1) 1: AOT -> Sensor
- (2) 2: AOR -> Temp. Reference
- (3) 3: VDD -> Supply Voltage
- (4) 4: Vss -> Ground

TO Header Bottom Side



Package drawings TO-5 and TO-18 see HTS- and HMS series datasheet


Modifications reserved Rev. 08 / 08.04.2008



HMS Series

Miniature Thermopile Sensors for Remote Temperature Measurement and Gas Analysis

The HMS Series of CMOS compatible thermopile sensor chips in TO46 (or TO18) and even smaller transistor housings, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The smaller package sizes benefit applications in which sensor mounting is a critical parameter. Especially the ultra small HMS Z11 F5.5 sensor with high symmetry (no orientation tap) opens new design and application possibilities. The HMS M-types offers the possibility to integrate an infrared lens into a TO46 housing and to reduce the field of view accordingly. The smaller chip TP1 is well suited for temperature measurements which require a precise measuring spot whereas the chip type TP2 offers higher signal.



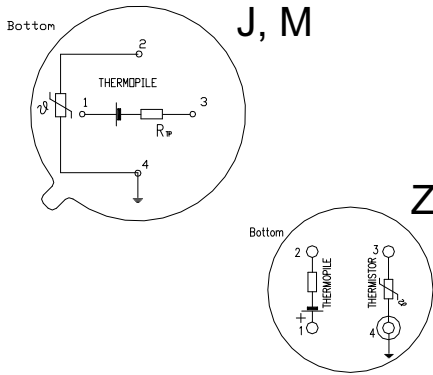


Parameter	HMS Z11	HMS J11	HMS J21	Unit
element size	0,61 ²	0,61 ²	1,2 ²	mm ²
voltage response ¹	13	13	39	V mm ² /W
sensitivity ¹	36	36	27	V/W
resistance R _{TP} ²	86	86	84	k Ohm
TC of resistance R _{TP} ²	0.02	0.02	0.02	% / K
noise ²	38	38	37	nV / Hz ^{1/2}
detectivity ^{1,2}	5,6 · 10 ⁷	5.6 · 10 ⁷	8.7 · 10 ⁷	cm Hz ^{1/2} / W
time constant	< 6	< 6	10	ms
thermistor reference ²	100	100	100	kOhm
temp.coeff.of thermistor B ³	3940	3940	3940	K
field of view ⁴	95	120	120	
operating temperature		-20...120		°C
storage temperature		-40...120		°C


Ordering Information:

HMS / package shape / chip type /
w/wo thermistor / F desired filter type,
e.g.: HMS J11 F5.5


- 1) filter type F5.5, Tobj=100°C, DC
- 2) at Tamb=25°C
- 3) 25°C, 50°C
- 4) degree at 50% signal level

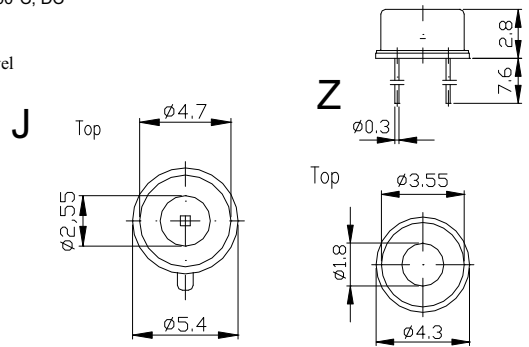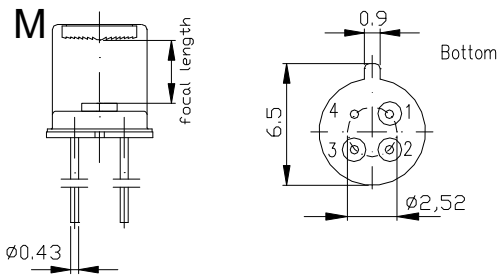


Filter types for temperature measurements

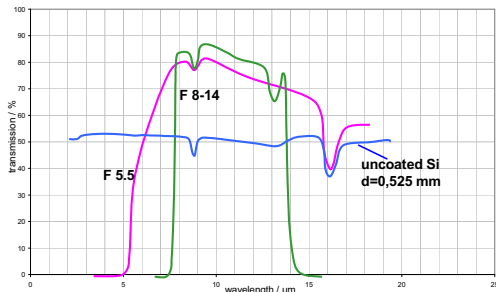

Filter types for Gas Analysis

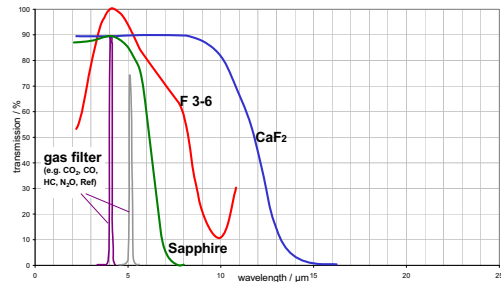




Modifications reserved Rev.07 / 01.10.2004



HMS-M Series

Thermopile Sensors with Lens L 3.0


The HMS-M Series combines the good characteristics of the HMS Series in TO46 housing and the advantages of a diffractive lens in respect to field of view and signal. The focal length of this lens is 3.0 mm and it is available with F5.5 or F8.0 filter coatings.




Parameter	HMS M11	HMS M1C1	HMS M21	Unit
element size	0,61 ²	0.76 ²	1,2 ²	mm ²
signal voltage ¹	330	480	890	μV
resistance R _{TP} ²	86	75	84	k Ohm
temp. coeff. of resistance R _{TP}	0.02	0.02	0.02	% / K
noise ²	38	35	37	nV/ Hz ^{1/2}
time constant	< 6	< 9	< 13	ms
thermistor reference ²	100	100	100	kOhm
temp. coeff. of thermistor B ³	3940	3940	3940	K
field of view ⁴	12° @ 50% 20° @ 10% 25° @ 5%	14° @ 50% 22° @ 10% 26° @ 5%	16° @ 50% 30° @ 10% 34° @ 5%	degree
operating temperature	-20...120			°C
storage temperature	-40...120			°C

- 1) Tamb=25°C, TBB = 100°C, 4.5Hz, distance 15mm, filter F5.5
- 2) at Tamb=25°C
- 3) 25°C, 50°C
- 4) Full FOV vs indicated Sv level
Diagonal cut
Tested with point source

M11 L3.0 Field of View

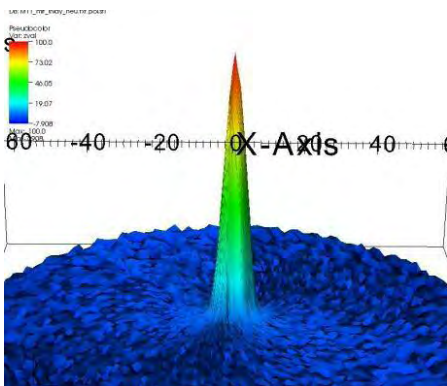

Filter types for lenses L 3.0

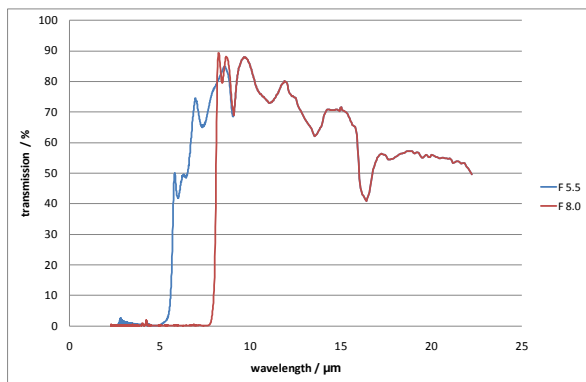


Modifications reserved Rev.01 / 28.07.2011



HTIA series with optics

Thermopile Modules for Temperature measurement

- Thermopile sensor with integrated ASIC for signal processing
- 2 analog outputs for thermopile and reference signal
- Simple linear reference function for external compensation
- Small size by COB technology
- Fast response time of 6 msec available
- Various optics and filter available



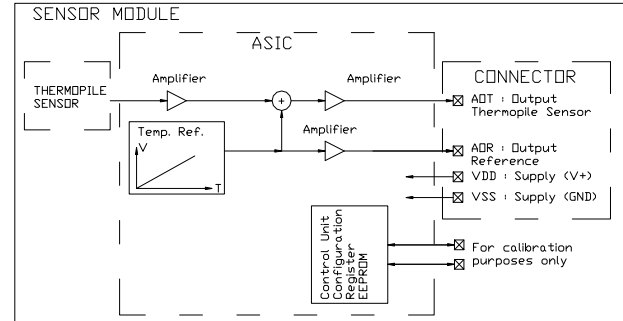


Ordering information for Modules:

Please specify:

- object temperature range
- ambient temperature range
- object (surface) emissivity
- required temperature accuracy and resolution
- required optics
- environmental conditions
- requested speed of response
- connector type and mounting

Parameter	Typical Value	Unit	Condition
supply voltage	5	V	VDD
supply current	1	mA	without load
output voltage range	0.3 ... (Vdd - 0.3)	V	
thermopile amplification	500 ... 5000		
object temperature range	-30 ... +500 (max)	$^{\circ}C$	object emissivity 90%
gradient temp. reference	8 ... 18	$mV/^{\circ}C$	at AOR
response time	6 ... 10	ms	$t/T = 63\%$
operating temperature	-20 to 120	$^{\circ}C$	

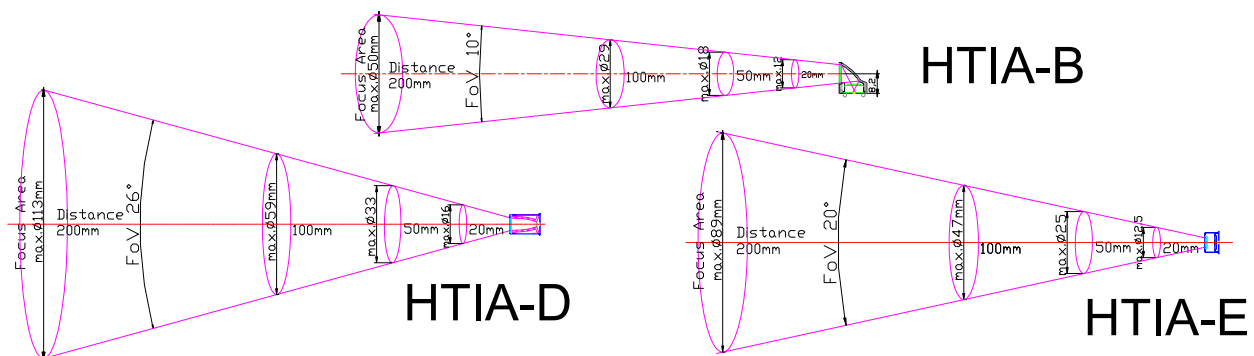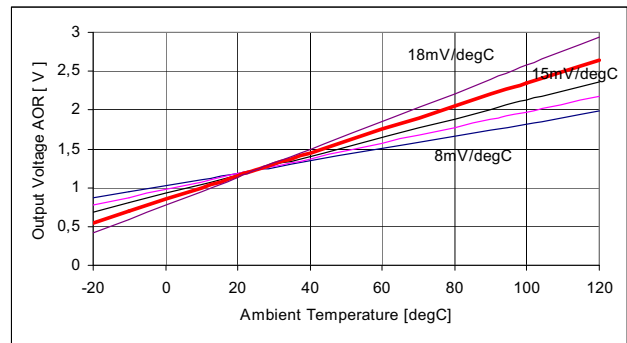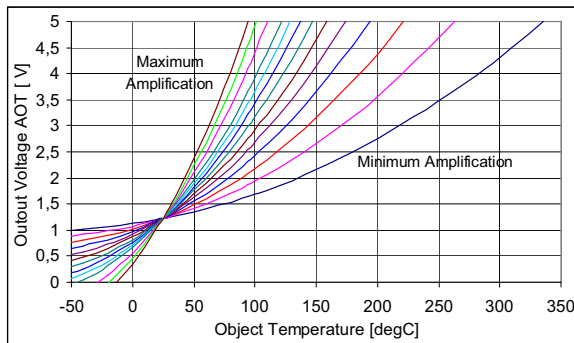

Modifications reserved Rev.07 / 05.10.2004




HTS Series


Thermopile Sensors for Remote Temperature Measurement and Gas Analysis

The HTS Series of CMOS compatible thermopile sensor chips in a TO39 size transistor housing, features good sensitivity, small temperature coefficient of sensitivity and high reproducibility and reliability. The smallest chip TP1 is well suited for temperature measurements which require a precise measuring spot whereas the chip type TP3 is optimized for highest signal.

Additionally Heimann Sensor can offer integrated thermopile sensors (HIS series) combining a thermopile sensor chip with an ASIC in a TO39 housing.







$$R_{therm.ref}(T) = R_{25} \cdot e^{B \cdot \left(\frac{1}{T} - \frac{1}{T_{25}} \right)}$$




Ordering Information:
HTS / cap aperture / chip type /
w/wo thermistor / F desired filter
e.g.: HTS A11 F5.5

Parameter	HTS A11	HTS B21 C21	HTS B31 C31	Unit
element size	0,61 ²	1,2 ²	2,1 ²	mm ²
voltage response ¹	13	39	74	V mm ² /W
sensitivity ¹	36	27	16	V/W
resistance R _{TP} ²	86	84	88	kOhm
TC of resistance R _{TP} ²	0.02	0.02	0.02	% / K
noise ²	38	37	38	nV/ Hz ^{1/2}
detectivity ^{1,2}	5.6 · 10 ⁷	8.7 · 10 ⁷	9.1 · 10 ⁷	cm Hz ^{1/2} / W
time constant	6	10	18	ms
thermistor reference ²	100	100	100	kOhm
temp. coeff. of thermistor B ³	3940	3940	3940	K
field of view ⁴	70	100	100	°
operating temperature	-20 ... 120			°C
storage temperature	-40 ... 120			°C


- 1) filter type F5.5, Tobj=100°C, DC
- 2) at Tamb=25°C
- 3) 25°C, 50°C
- 4) deg at 50% signal level

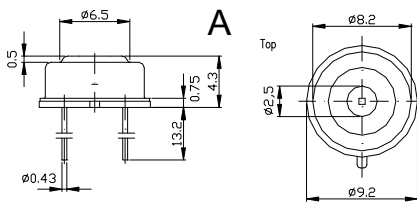

Filter types for temperature measurements

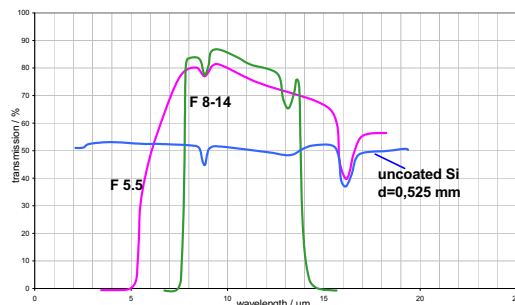

Filter types for Gas Analysis

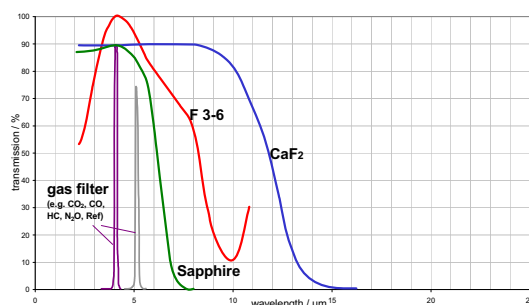


Modifications reserved Rev.07 / 01.10.2004



HTS Multichannel Sensor

Thermopile Sensor for Gas Analysis




The HTS Multichannel Sensors comprise two or four independent sensor chips for a multichannel gas concentration measurement. Typically one to three of the optical channels contain a gas specific filter window and the other channel, equipped with a filter with center wavelength where no gas absorption occurs, serves as reference. Of course we can also provide Multichannel Sensors with customer filters (thickness should be close to 0.5 mm).

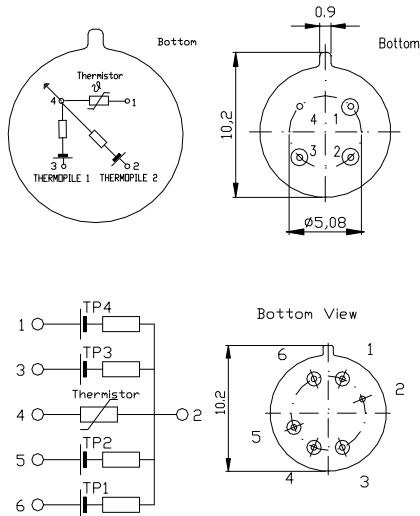

Parameter	HTS Q21	HTS E21	HTS E31	Unit
number of channels	4	2	2	
element size	1,2 ²	1,2 ²	2,1 ²	mm ²
voltage response ¹	125	125	237	V mm ² /W
sensitivity ¹	86	86	51	V/W
resistance R _{TP} ²	84	84	88	k Ohm
TC of resistance R _{TP} ²	0.02	0.02	0.02	% / K
noise ²	37	37	38	nV/ Hz ^{1/2}
detectivity ^{1,2}	2.7 · 10 ⁸	2.7 · 10 ⁸	2.9 · 10 ⁸	cm Hz ^{1/2} / W
time constant	10	10	18	ms
thermistor reference ²	100	100	100	kOhm
temp. coeff. of thermistor B ³	3940	3940	3940	K
operating temperature		-20..120		°C
storage temperature		-40..120		°C

1) without filter, T_{obj}=500°C, DC
 2) at T_{amb}=25°C
 3) 25°C, 50°C

Ordering Information:
 HTS / package type / chip type /
 w/wo thermistor / F desired filters
 e.g.: HTS E21 F4.0 / F4.26

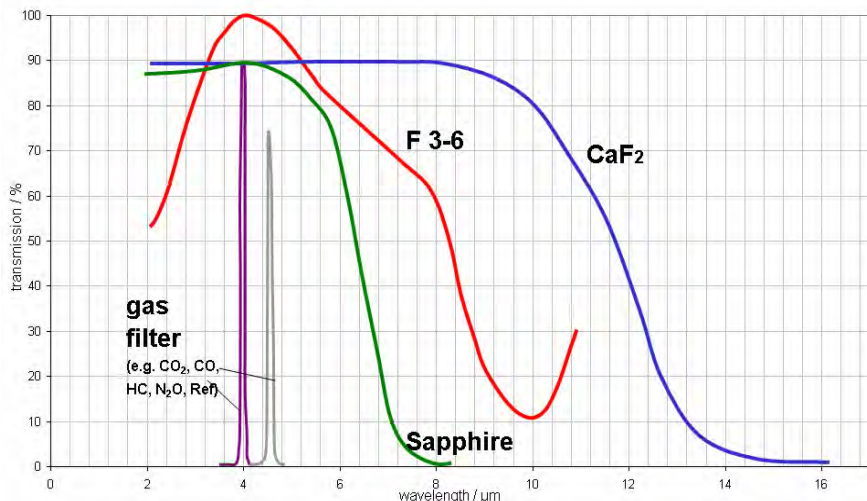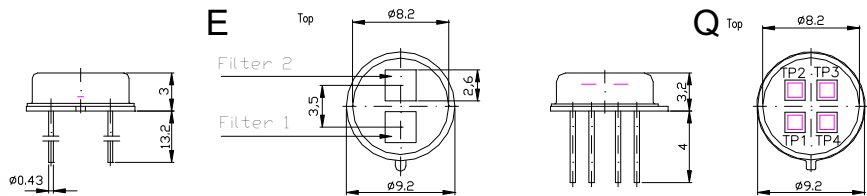

Please contact Heimann Sensor also for

- IR lamps,
- light concentrators or
- high precision broad-band IR sources.

Modifications reserved Rev.08 / 01.10.2004

Intro

Heimann Sensor components are exceptionally suitable to measure the concentration of several gases by NDIR method. Steady improvements on existing products as well as constantly developing innovations, puts us in the position of being able to provide best support to all our customers. This note gives an overview on the physics, available components and the principles of measurement.

Physics

The nondispersive infrared (NDIR) gas detection is based on the absorption of infrared radiation, which is shown by many polyatomic or heterodimer diatomic gases. For example CO₂ gas absorbs IR radiation at 4.26µm wavelength. The detected radiation intensity at this wavelength decreases if the concentration of CO₂ increases between source and detector. The extent of absorption mainly depends on the absolute number of CO₂-molecules between radiation source and detector. Accordingly the given concentration for a measured intensity is a function of the cell length and the gas density.

The law of Lambert and Beer describes the transmitted intensity I in relation to the initial intensity I_0 , where k is a specific absorption coefficient, c is the concentration and s is the absorption path length:

$$I = I_0 \cdot e^{-k \cdot c \cdot s} \quad (1)$$

Note: In equation (1) the concentration c refers to the volume, not to the total number of molecules. As the gas density is a function of the given pressure, the concentration in ppm is also pressure dependent.

Basic Set-Up

The basic set-up consists of an IR-source, the gas cell, an IR filter matching the absorption line of interest and the IR-Sensor (see Figure 1).

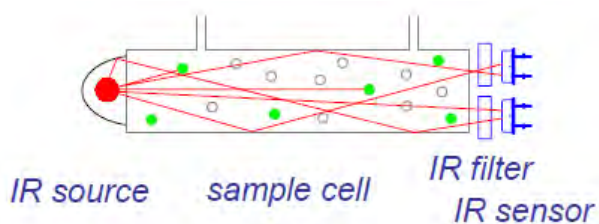


fig. 1 example set-up with dual channel sensor

Optics to focus the radiation can be integrated, as well as measures to increase the reflecting ratio on inner walls. The gas cell must ensure access to free flowing gas, but it is not strictly recommended to have a single path. A design increasing the path length by folding the rays is also possible.

Application Note NDIR-Measurement

Rev.1: 2013.10.02, Hu, MaS



Sensor Components

Main part of the set-up is the sensor with integrated optical filter(s). A single sensor could be used as well as a dual-channel sensor to manage source variations and minimize aging effects.

Also available are 4-channel-sensors for multi-gas-detection (see figure 2). The different channels vary in the use of diverse filters, according to the specific absorbing wavelength of the gases to be detected.

One channel without sensitivity to any of the gases can be used as reference.



fig. 2 Dual and 4-channel Sensor HTS E21 and HTS Q21

Thermopile infrared sensors create a voltage signal (U) proportional to the received radiation. The signal is generated by a difference of temperature of the object (T_{Object}) and the sensors own temperature (T_{amb}). Equation (3) describes the basic function, where K is an apparatus constant and the exponent n depends on the actual filter characteristics. n reaches a theoretically maximum of $n=4$ for a perfect "black" characteristic and unlimited wavelength.

$$U = K \cdot (T_{Object}^n - T_{amb}^n) \quad (2)$$

All multichannel sensors tend to crosstalk effects, where sensor chips might receive radiation passing through a different close-by filter. To avoid these effects all Heimann multichannel sensors are equipped with an optical barrier working as crosstalk suppression.

The following table gives an overview for the many different detector options available from Heimann Sensor.

type	size	TP Chip	channels	integrated amplifier	output
HMS J21 F1	TO46	TP2	1	N	analog
HTS A21 F1	TO39	TP2	1	N	analog
HTS E21 F1/F2	TO39	TP2	2	N	analog
HTS Q21 F1/F2/F3/F4	TO39	TP2	4	N	analog
HIM J1C2 F1 G4300	TO46	TP1C	1	Y	analog
HIS A22 F1 G4300	TO39	TP2	1	Y	analog
HID A2x F1 G100	TO39	TP2	1	Y	digital
HIS E222 F1 F2 G4300	TO39	TP2	2	Y	analog
HID E22x F1 F2 G100	TO39	TP2	2	Y	digital
HCS C21 F1	SMD3.8x3.8	TP2	1	N	analog
HCM C1C2 F1	SMD3.8x3.8	TP1C	1	Y	analog
Plus many different highest detectivity pyroelectric sensors	TO39 TO8	various element sizes	1, 2, 4	voltage mode	analog

Note: F1 to F4: filter matching infrared absorption lines of specific gases or reference filter (recommended filters in below list)

Optical Filters

The following filter specifications are available at Heimann Sensor.

Gas	CWL /nm	Tol /%	Tol /nm	HPBW /nm	HPBW Tol /nm
CH ₄	3300	±1	±33	160	±20
HC	3375	±1	±34	190	±20
CO ₂	4260	±1	±43	180	±20
CO ₂	4270	±1	±43	90	±20
CO ₂	4430	±1	±44	60	±10
CO	4640	±1	±46	180	±20
Ref	3910	±1	±39	90	±20

Further filters can be sourced on demand if the customer provides the specification in terms of center wavelength, half power bandwidth and blocking.

If Heimann Sensor is asked to do the dicing of consigned filter material, we need to know about the substrate material so that we can calculate the dicing cost. The preferred thickness is 0.5 mm.

If a customer wants to consign diced filter windows, first we need to agree on the appropriate window specification.

The filter transmission curves will vary with temperature and angle of incidence.

If the angle deviates from normal condition, the filter shifts to shorter wavelength. Equation (3) describes this dependency.

$$\lambda_{\Theta} = \lambda_0 \cdot \frac{\sqrt{n^2 - \sin^2 \Theta}}{n} \quad (3)$$

with λ_0 being the specific wavelength, n the index of refraction and Θ being the angle of incidence.

Sources

Besides infrared sensors Heimann Sensor offers infrared lamps and infrared radiation sources to be used together with our detectors in NDIR gas detection.

The infrared lamps HSL 5/115, HSL 5/60 or HSL 5/115/S are low cost and reliable IR sources with a long lifetime. They can be used for wavelengths up to approximately 4.5 μm and they can be operated in DC or AC mode. Typical operating conditions are 5 V and 115 mA respectively 60 mA. The version "S" has the leads fixed in a small socket.

The infrared sources are micro-machined thermal infrared emitters that allow fast electrical modulation for wavelengths range up to 16 μm . A patented technology enables manufacturing of sources with true black body characteristics and very high emissivity combined with low power consumption and long life time. The sources are available with and without a concentrating reflector mirror. The standard version comes without window in a TO39 package.

IR sources in TO46 or even micro TO packages are also available.

Measurement Method

To make sure to process only source data, the emission of the source should be pulsed, generating time based sequences with a well defined frequency. To avoid thermal drifts, time of emission should be short to ensure a sufficient cool down time. Figures 3&4 show an example: a pulse sequence of 8 pulses, 140 ms/pulse at 1.33 Hz of the source and the corresponding received radiation of the sensor.

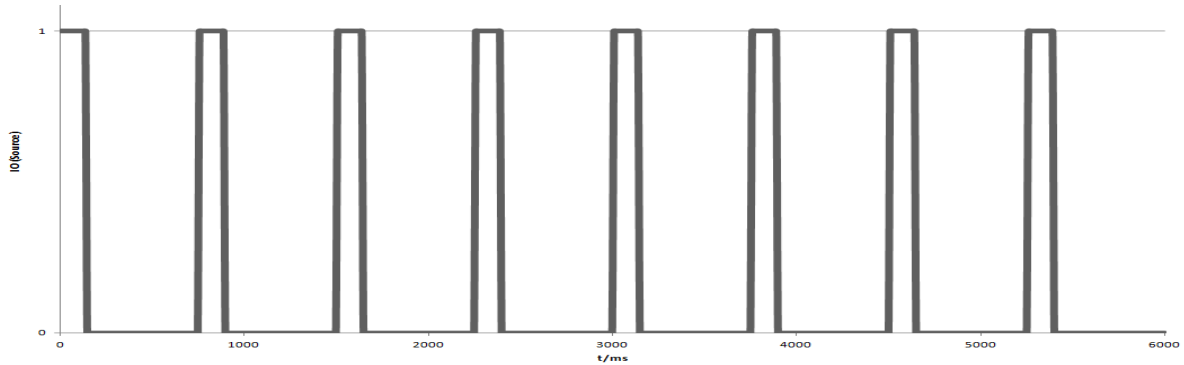


fig. 3 Pulse sequence of the source

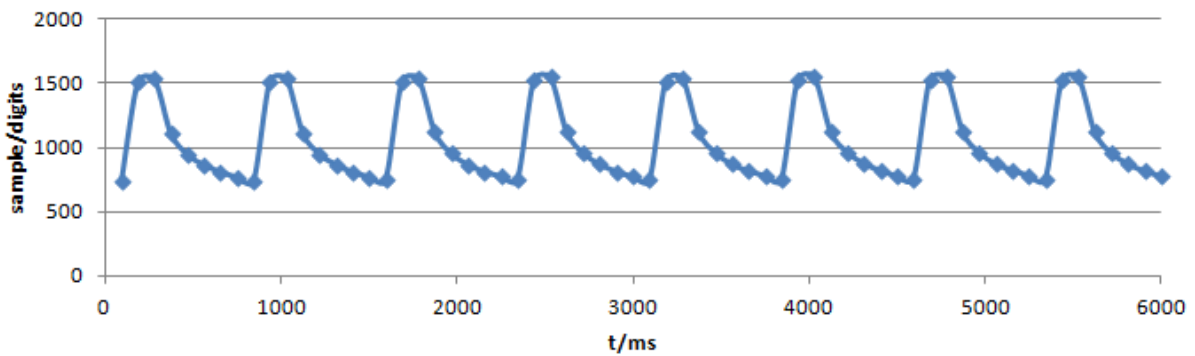


fig. 4 Sample sequence of the sensor

Reference channel and gas-sensitive channels can be recorded simultaneously. Data could be frequency-analyzed with an FFT (fig. 5&6).

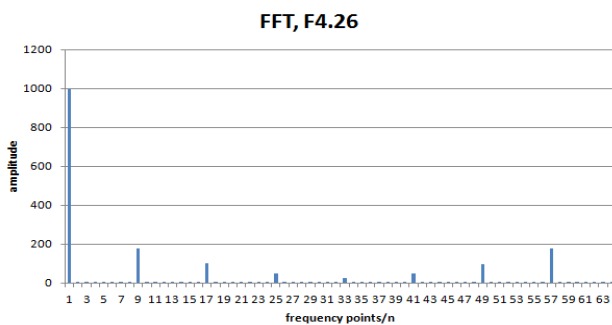


fig. 5 FFT of a CO₂ sensitive channel

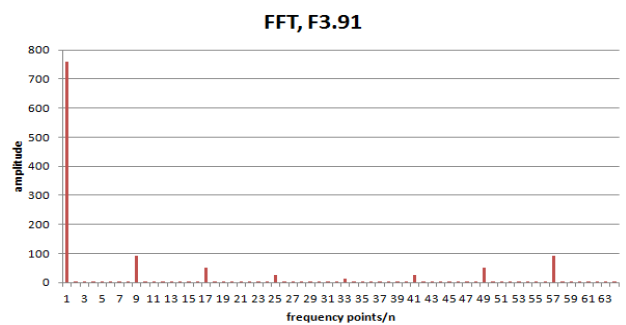


fig. 6 FFT of the reference channel

In general there are two possible ways to evaluate the data. Either do take the quotient or the difference of gas sensitive and reference channel.



Infrared Measurement

Application Notes

Every object emits electromagnetic radiation, which wavelength spectrum is dependent on its temperature. For an object without “color”, which means that no wavelength is selectively emitted or absorbed, the radiation spectrum is completely determined by the temperature alone. In this case, the total radiation power P_{obj} emitted by an object of temperature T_{obj} can be expressed as

$$P_{obj} = \sigma \cdot \epsilon \cdot (T_{obj})^4$$

with σ being the Stefan-Boltzmann constant and ϵ the so-called emission factor (or emissivity) of the object. In the ideal case ϵ has the value 1 (black body). For many substances the emission factor lies in the range between 0.85 to 0.95. The above equation is called the Stefan-Boltzmann law. It integrates the total quantity of radiation over all wavelength.

The *net* power P_{rad} received by the thermopile is related to the object temperature T_{obj} and to the temperature of the thermopile chip itself. This value is generally referred as T_{amb} , the ambient temperature.

Therefore the total heat power P_{rad} received from the object at temperature T_{obj} is given to

$$P_{rad} = K \cdot (\epsilon_{obj} \cdot T_{obj}^4 - \epsilon_{abs} \cdot T_{amb}^4)$$

The empirical factor K is a constant device factor.

The thermopile sensor delivers an output signal proportional to the heat flux. The heat balance equation is the basis of any quantitative temperature measurement ($S \rightarrow$ voltage sensitivity).

$$U_{TP} = S \cdot P_{rad} = S \cdot K \cdot (\epsilon_{obj} \cdot T_{obj}^4 - \epsilon_{abs} \cdot T_{amb}^4)$$

It describes that the output voltage is a function of the object and the ambient temperature. For a fixed ambient, the theoretical output voltage of the thermopile chip is proportional to T_{obj}^4 . The T^4 -dependence is only valid, if the sensor senses the whole electromagnetic spectrum with the same sensitivity.

Since in all practical situations the thermopile sensor never senses over all wavelengths with the same sensitivity, the pure T^4 -dependence will rarely be seen. The real dependency can be better described by a polynomial regression of many polynomial factors and coefficients.


The output voltage also varies with the ambient temperature. Any IR temperature measurement system needs therefore to compensate this effect.

There are two possible ways to realize the ambient temperature compensation of the output signal. The analog way by employing an analog circuit. The circuit is designed in a way, that a voltage is generated, which matches exactly the loss or gain in output voltage due to any ambient temperature change.


For high accuracy applications a digital (numerical) calculation method is needed. In this case, the two signals, thermopile voltage and temperature reference signal are derived separately and fed into a microcontroller system, where the necessary calculations are made. The ambient temperature compensation can be performed using look-up tables or polynomial regression equations as a function of the ambient temperature, thermopile output and as result the object temperature. The calculation is related to a defined emissivity. The emissivity variation can be considered by a factor.

Example Amplifier Circuits

Common Amplifier

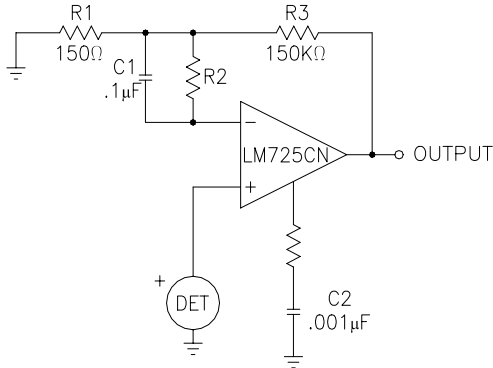


Micro Power Amplifier

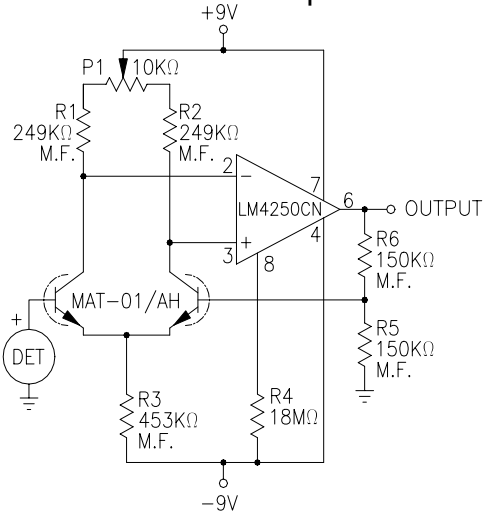

LM4250CN NATIONAL SEMICONDUCTOR AVAILABLE FROM DIGIKEY
R2 IS SELECTED TO MATCH DETECTOR RESISTANCE


MAT-01/AH ANALOG DEVICES AVAILABLE FROM NEWARK ELECTRONICS
LM4250CN NATIONAL SEMICONDUCTOR AVAILABLE FROM DIGIKEY
M.F. = METAL FILM RESISTOR

Modulated Signal Rectifier For 10Hz (Full Wave)

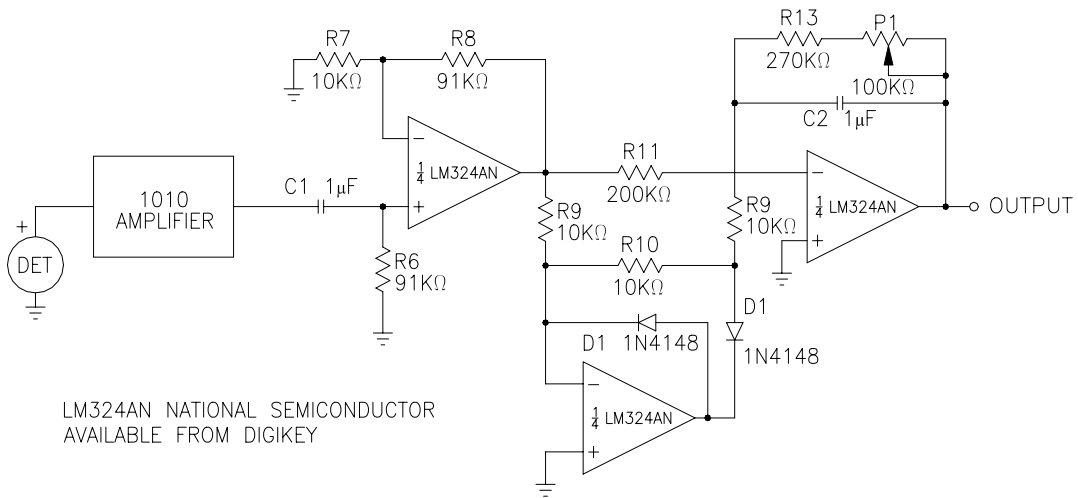

LM324AN NATIONAL SEMICONDUCTOR AVAILABLE FROM DIGIKEY

Equivalent Circuit Single Element Thermopile Detector

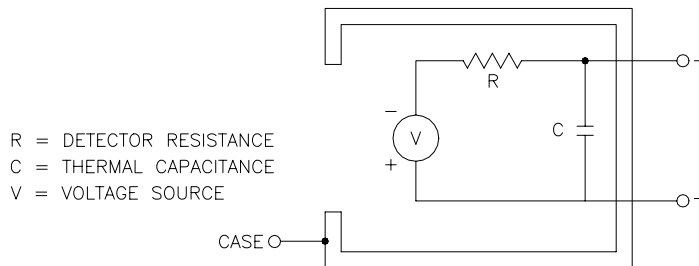

This page intentionally blank.

Datasheet Integrated Sensor SMD
Type HCM Cx2 Fxxx



Features and Benefits

- Small size, low cost, integrated ASIC with analog outputs
- Surface mountable ceramic leadless chip carrier CLCC with 3.8mm
- Operating range 2.7V to 5.5V , -40°C to 120°C
- Sensor gain adjustable to 4300 or 2150 (preset 4300 with internal pull-up res.)
- Integrated linear temperature reference with a sensitivity of typical 16mV/°C
- Large variety of available filter types for different application

Ordering Information

HCM -> Heimann thermopile sensor and ASIC in a SMD ceramic carrier
 Cx2 -> „C“ ceramic carrier of 3.8mm ; „x“ sensor chip (list) ; „2“ ASIC STP1
 Fxxx -> application-specific filter type (list)

Sensor Chip Selection		
<i>Parameter</i>	<i>Sensor chip "1"</i>	<i>Sensor chip "2"</i>
Absorbing area	0.61x 0.61mm ²	1.2 x 1.2mm ²
Sensitivity	50 V/W	38 V/W
Voltage response	19 Vmm ² /W	55 Vmm ² /W
Resistance	85 kOhm	85 kOhms
Time constant	5ms	8ms
Filter Selection		
<i>Filter Type</i>	<i>Application</i>	<i>Specification</i>
F4.26-180	CO2 gas detection	NBP CWL 4.26µm HPB 180nm
F4.27-90	CO2 gas detection	NBP CWL 4.27µm HPB 90nm
F4.43-60	CO2 gas detection	NBP CWL 4.43µm HPB 60nm
F4.64-180	CO gas detection	NBP CWL 4.64µm HPB 180nm
F3.30-160	HC gas detection	NBP CWL 3.30µm HPB 160nm
F3.37-190	HC gas detection	NBP CWL 3.375µm HPB 190nm
F3.91-90	gas reference	NBP CWL 3.91µm HPB 90nm
F5.5	temperature detection	LWP Cut On 5.5µm
F8-14	temperature detection	BP HPP 8µm to 14µm


Please contact Heimann customer service for special filter requirements.

Operating Conditions

Parameter	Typical Value	Unit	Condition
Supply voltage VDD	(2.7).. 3 .. 5..(5.5)	V	+Vs
Supply voltage VSS	0	V	-Vs , Ground
Supply current	1	mA	Without load
Open loop gain	90	dB	
Low pass frequency	240	Hz	ASIC
PSRR	>40	dB	
Output voltage range	0.15 .. (VDD-0.15)	V	
Start up time after POR	Max. 0.5	sec	Electrical start up
Noise voltage input related	45	nV/ $\sqrt{\text{Hz}}$	Output TPO; Sensor + ASIC
Zero input sensor signal	1.25	V	Output TPO
Sensor gain adjustment	4300 or 2150	V/V	Output TPO ; adjustable
Temp. ref. voltage at 25°C	1.45	V	Output TRO
Sensitivity temp. reference	16	mV/°C	Linear ; Output TRO
Field of view	120	degree	
Operating temperature	-40.. 120	°C	

Pin Assignment


Pin No.	Sym bol	Description
1	GAIN	Gain factor 4300 (Internal pull up or VDD on GAIN) Gain factor 2150 (VSS/GND on GAIN)
3	VDD	Positive supply voltage
4 / 8	VSS/ GND	Negative supply voltage / Ground (0V)
6	TPO	Analog temperature reference output voltage
7	TRO	Amplified thermopile sensor output voltage

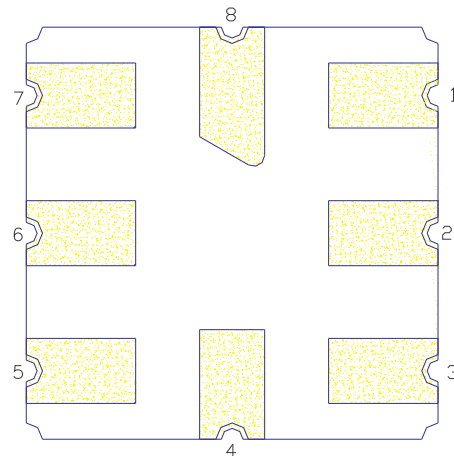


Datasheet Integrated Sensor SMD
Type HCM Cx2 Fxxx




Dimensions

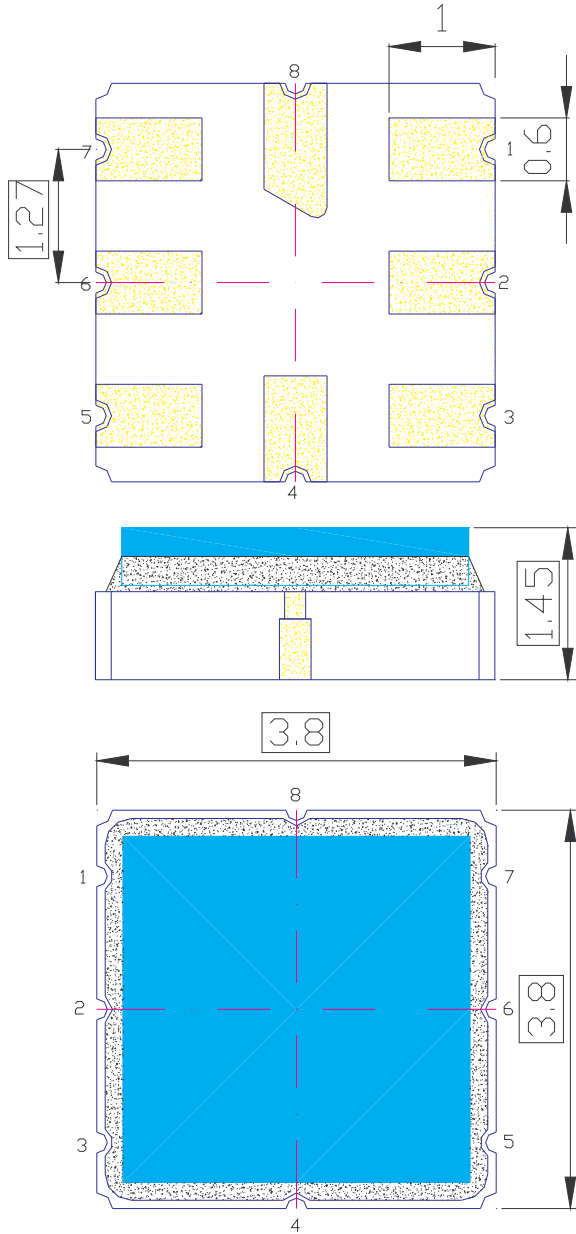

HCM C12 ..

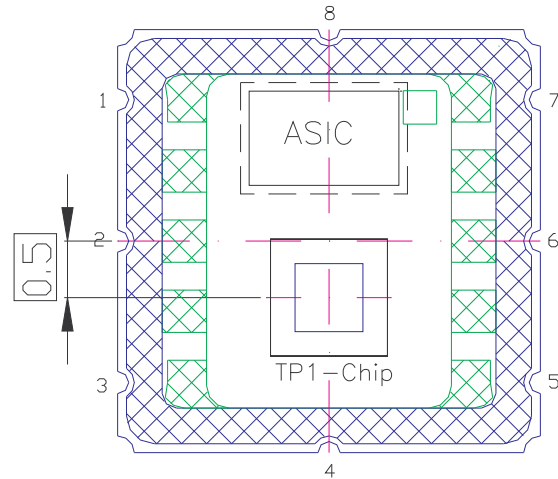

HCM C22 ..

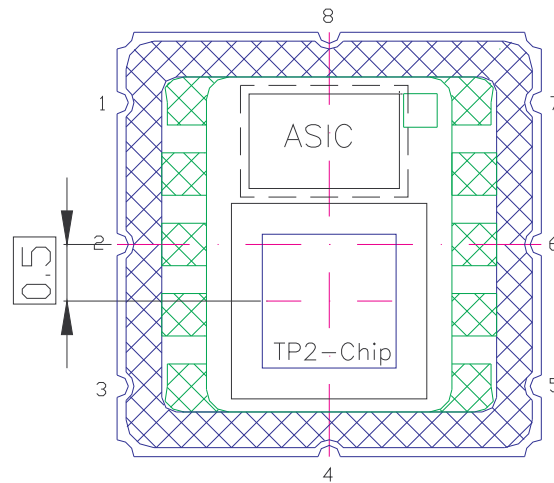

Application Hints

Heimann integrated sensors are used for non-contact temperature measurements. A thermopile sensor and a signal conditioning circuit (ASIC) are integrated in the same housing. The thermopile sensor converts the temperature radiation of an object surface to an electrical signal (voltage) by thermocouples (Seebeck effect). The sensor output voltage is related to the object temperature and object emissivity (radiation) as well as to the sensor chip temperature (housing temperature) and surrounding temperature (radiation) by the following equation :

$$V_S = K * \epsilon * (T_O^n - T_S^n) \quad \text{at } T_A = T_S$$

V_S -> sensor output voltage ; K -> constant apparatus factor ; ϵ -> object emissivity ; T_O -> object temperature ; T_A -> ambient (surrounding) temperature ; T_S -> sensor (housing) temperature ; n -> exponent to describe the temperature dependency of the signal voltage

The low noise amplifier of the ASIC transforms the sensor signal to a suitable voltage range. A temperature related voltage provided by the ASIC can be used to compensate ambient temperature drift effects.

A gas concentration can be measured by monitoring the absorption of an infrared light beam. The base equation for gas concentration measurement in the infrared way is Beer's law :

$$I = I(0) * \exp(-k * c * L)$$

I -> radiant flux at the point of measurement
 $I(0)$ -> base radiant flux of the test system without gas absorption
 k -> constant (gas and filter specific)
 L -> measuring distance
 c -> gas concentration

The radiant flux is proportional to the output voltage of the sensor module :
 $U/U(0) \sim I/I(0)$.

A special infrared light source is used to generate the radiant heat. The infrared source needs to be pulsed to eliminate parasitic temperature influences. Don't hesitate to contact HEIMANN Sensor for support to use our long-time experience in infrared sensors and sensor modules.

Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

Preliminary Datasheet
 Digital Sensor Module with 2 IR Channels
 Type HID E2x Fyyy Fzzz




Features and Benefits

- Thermopile Sensor with ASIC in TO-5 housing with 4 leads
- 2 IR channels with low noise chopper amplifiers and programmable gain
- Digital voltage output (via SMBus compatible RAM access) or PWM output
- 3V and 5V supply ranges available
- Complies with ROHS regulations

Ordering Information


HID : Heimann thermopile sensors and ASIC in TO-5 housing
 E2 : ->„E“ cap with 2 filter openings ;
 ->„2“ two thermopile sensors of type TP2
 x : ASIC supply voltage ->„4“ : 5V ; ->„5“ : 3V
 Fyyy : Filter 1 of IR channel 1, selection acc. to filter list
 Fzzz : Filter 2 of IR channel 2, selection acc. to filter list
 e.g. HID E24 F3.91-90 F4.26-180

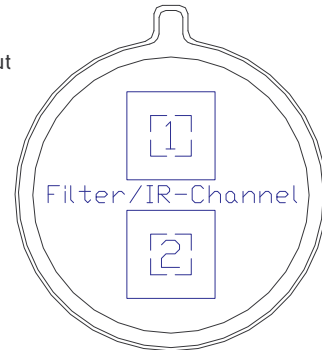

Filter Selection (Please contact Heimann customer service for special filter requirements)		
<i>Filter Type</i>	<i>Application</i>	<i>Specification</i>
F5.30-180	NO gas detection	NBP CWL 5.30µm HPB 180nm
F4.64-180	CO gas detection	NBP CWL 4.64µm HPB 180nm
F4.43-60	CO2 gas detection	NBP CWL 4.43µm HPB 60nm
F4.26-180	CO2 gas detection	NBP CWL 4.26µm HPB 180nm
F4.27-90	CO2 gas detection	NBP CWL 4.27µm HPB 90nm
F3.91-90	gas reference	NBP CWL 3.91µm HPB 90nm
F3.37-190	HC gas detection	NBP CWL 3.375µm HPB 190nm
F3.30-160	HC gas detection	NBP CWL 3.30µm HPB 160nm

Pin Configuration

<i>Pin</i>	<i>Sym</i>	<i>Description</i>
1	SCL	Digital input , serial clock in SMBus compatible mode
2	VDD	Positive supply voltage
3	SDA / PWM	Digital I/O , data input /output in SMBus compatible mode (open drain), pulse width modulated temperature(s) in PWM mode
4	VSS	Negative supply voltage / Ground (0V) (connected to housing)

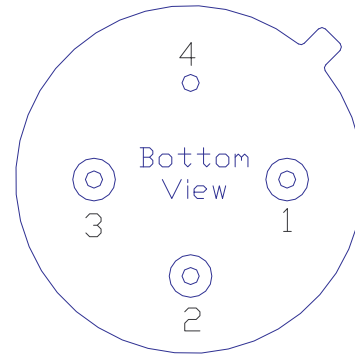

Maximum Ratings


<i>Parameter</i>	<i>Max. value</i>	<i>Unit</i>	<i>Condition</i>
Supply voltage 1 VDD	7	V	Type 5V
Supply voltage 2 VDD	5	V	Type 3V
Reverse voltage	0.4	V	Ground
ESD sensitivity	2	kV	Human body
Storage temperature	-40.. 125	°C	

Features and Benefits


- Thermopile Sensor with ASIC in TO39 housing mounted
- Lens optics with 8:1 D:S ratio
- Digital temperature output (SMBus compatible) or PWM output
- Temperature resolution < 0.1°C (RAM access by SMBus compatible operation)
- High accuracy over wide sensor temperature and object temperature ranges
- 3V and 5V versions available
- Complies with ROHS regulations

Ordering Information

HID -> Heimann thermopile sensor and ASIC
 in a TO39 housing mounted on pcb
 L1 -> „L“ lens cap TO39 ; „1“ sensor chip TP1
 x -> ASIC supply voltage „4“ : 5V or „5“ : 3V
 FL5.5 -> Infrared lens with 5.5mm focal length
 T380 -> Object temperature range

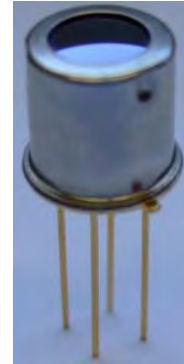


Pin Configuration

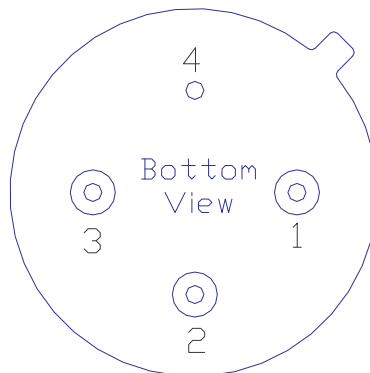

Pin	Symbol	Description
1	SCL	Digital input , serial clock in SMBus compatible mode
2	SDA/ PWM	Digital I/O , data input /output in SMBus compatible mode (open drain), pulse width modulated temperature(s) in PWM mode
3	VDD	Positive supply voltage
4	VSS	Negative supply voltage / Ground (0V) (connected to housing)

Dimensional Drawings

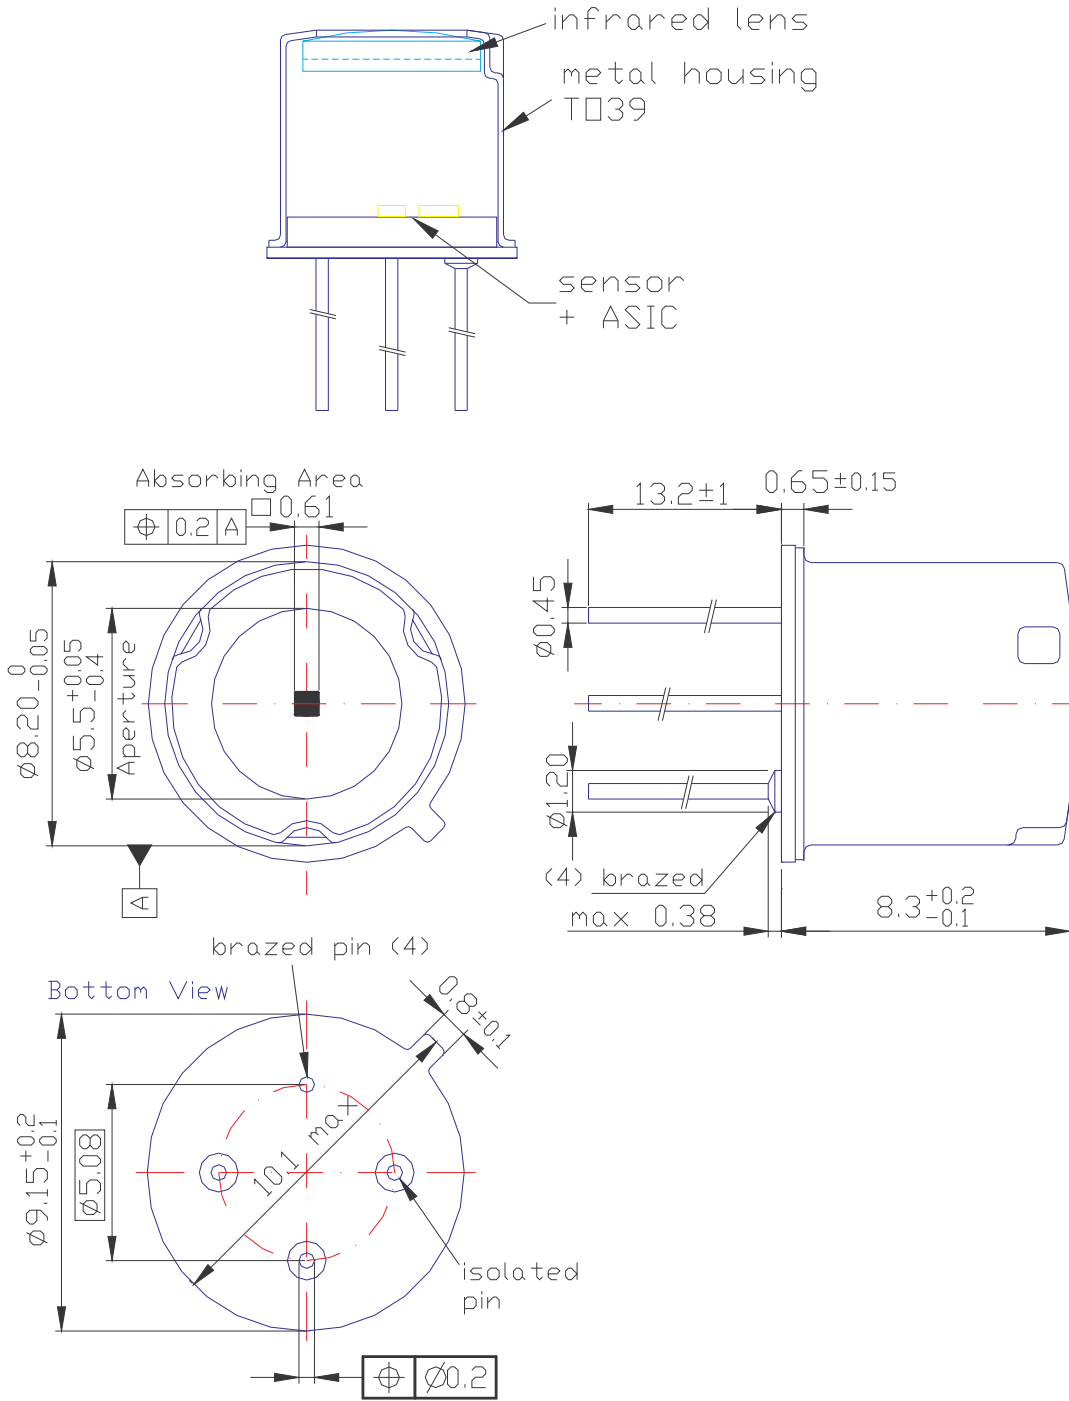


Maximum Ratings

<i>Parameter</i>	<i>Max. value</i>	<i>Unit</i>	<i>Condition</i>
Supply voltage 1 VDD	7	V	Type 5V
Supply voltage 2 VDD	5	V	Type 3V
Reverse voltage	0.4	V	Ground
ESD sensitivity	2	kV	Human body
Storage temperature	-40.. 125	°C	


Operating Conditions

<i>Parameter</i>	<i>Typical Value</i>	<i>Unit</i>	<i>Condition</i>
Supply voltage 1 VDD	5	V	Preset option "x -> 4"
Supply voltage 2 VDD	3	V	Preset option "x -> 5"
Supply voltage VSS	0	V	Ground
Supply current	1	mA	Without load
Start up time after POR	0.15	sec	
Sensor absorbing area	0.61 x 0.61	mm ²	Type TP1
Object temperature range	-30 .. +380	°C	Type "T380"
Ambient temperature range	-40 .. +125	°C	
Response time	5	ms	Sensor chip
Refresh rate	100 .. 250	ms	Temperature signal
IR transmission	52	%	Wavelength range 5.5µm to 13.5µm
Operating temperature	-40.. 125	°C	
Interface (EEPROM Configuration)	2-wire SMBus compatible, output preset to open drain NMOS		
	1-wire PWM output, 10 bit resolution, output configurable to push-pull or open drain		

Field of View – Definition and Sample Measurement

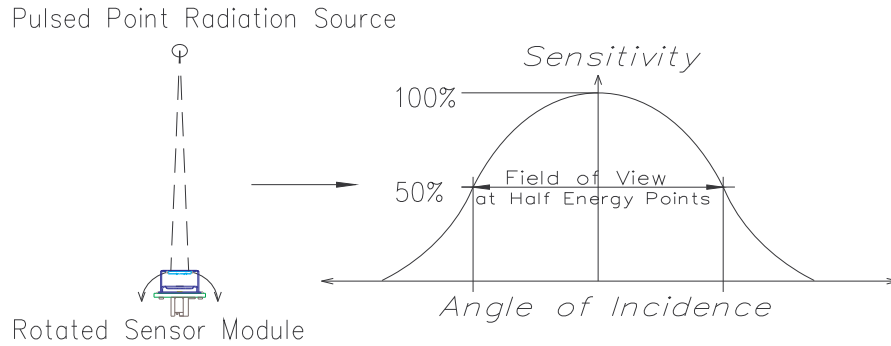

parameter	limits			unit	conditions
	Min	Typ	Max		
Optical axis		0		degree	Sensor view direction
Field of View		6		degree	50% energy points
D:S Ratio		8:1			Distance to spot size

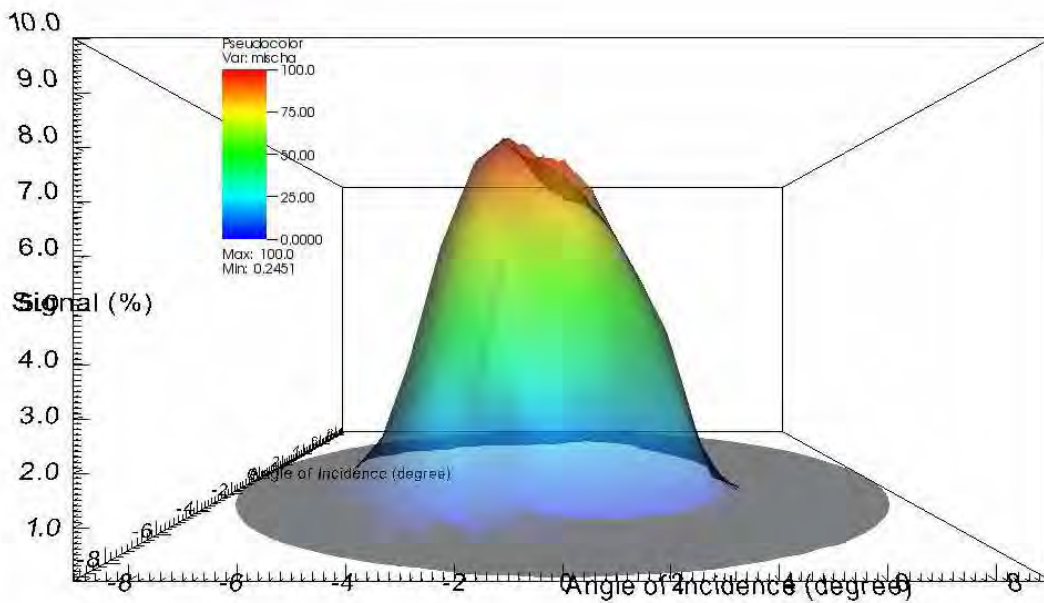

Temperature Performance

		Sensor (Ambient) Temperature [°C]				
		-40 .. 0	0 .. 50	50 .. 100	100 .. 125	
Object Temperature [°C]	-40 .. 0	±3°C	±2°C	±3°C	±4°C	Temperature Accuracy [°C]
	0 .. 60	±2°C	±1°C	±1.5°C	±2.5°C	
	60 .. 120	±3°C	±2°C	±2°C	±3°C	
	120 .. 180	±4°C	±2°C	±2.5°C	±3.5°C	
	180 .. 240	±5°C	±3°C	±3°C	±4°C	
	240 .. 380	±5°C	±4°C	±4°C	±5°C	

Notes to the temperature performance:

- The specified temperature performance presents preliminary findings based on sample investigations using special test equipment.
- The temperature accuracies are achievable by following conditions
 - thermal equilibrium of the sensor
 - no temperature differences in the sensor package
 - the object fills the sensor field of view completely
 - homogenously distributed temperature on the object surface
 - high and uniform emissivity of the object surface in the interesting infrared range

Liability

The contents of this document are subject to change without notice. Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.


Preliminary Datasheet
 Digital Sensor Module with 2 IR Channels
 Type HID E2x Fyyy Fzzz



Operating Conditions

Parameter	Typical Value	Unit	Condition
Supply voltage 1 VDD	5	V	Preset option "x -> 4"
Supply voltage 2 VDD	3	V	Preset option "x -> 5"
Supply voltage VSS	0	V	Ground
Supply current	1	mA	Without load
Start up time after POR	0.15	sec	
Sensor absorbing area	1.2 x 1.2	mm ²	Sensor type TP2
Sensitivity thermopile sensor	38	V/W	Sensor chip, 500K, 1Hz
Voltage response thermopile sensor	55	Vmm ² /W	Sensor chip
Gain factor preset	100	V/V	Range 1 .. 100
IR output voltage range	-475 .. 475	mV	RAM cells V _{TP}
Voltage resolution	0.0145	mV/step	
Response time	8	ms	Sensor chip
Refresh rate	100 .. 250	ms	Temperature signal
Temperature sensor range	-40 .. +125	°C	RAM cell T _A
Operating temperature range	-40.. 125	°C	
Interface (EEPROM Configuration)	2-wire SMBus compatible, output preset to open drain NMOS		
	1-wire PWM output, 10 bit resolution, output configurable to push-pull or open drain		

Dimensional Drawings

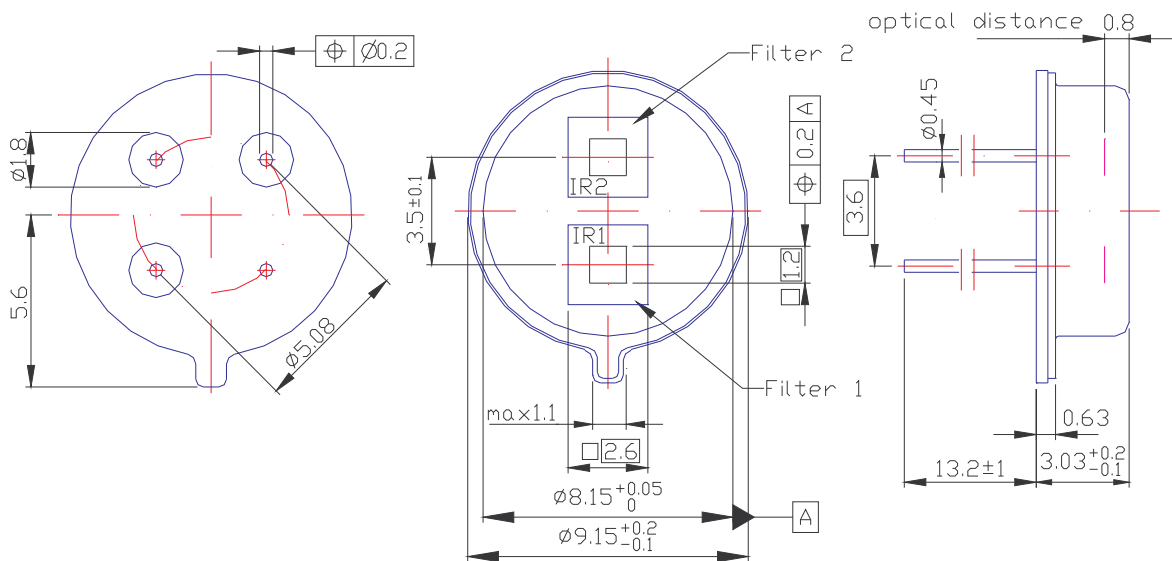


Preliminary Datasheet HID E2x Fxxx Fyyy R01 Oct 2009 Page 2 of 2

Features and Benefits


- Thermopile Sensor with ASIC in TO39 housing mounted
- Lens optics with 8:1 D:S ratio
- Digital temperature output (SMBus compatible) or PWM output
- Temperature resolution < 0.1°C (RAM access by SMBus compatible operation)
- High accuracy over wide sensor temperature and object temperature ranges
- 3V and 5V versions available
- Complies with ROHS regulations

Ordering Information

HID -> Heimann thermopile sensor and ASIC
 in a TO39 housing mounted on pcb
 L1 -> „L“ lens cap TO39 ; „1“ sensor chip TP1
 x -> ASIC supply voltage „4“ : 5V or „5“ : 3V
 FL5.5 -> Infrared lens with 5.5mm focal length
 T380 -> Object temperature range



Pin Configuration

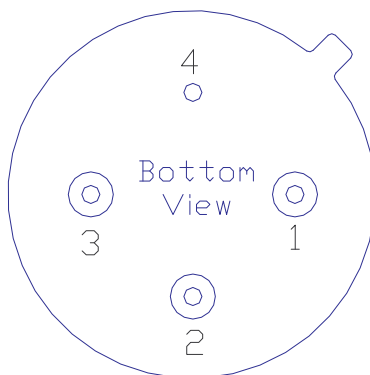

Pin	Symbol	Description
1	SCL	Digital input , serial clock in SMBus compatible mode
2	SDA/ PWM	Digital I/O , data input /output in SMBus compatible mode (open drain), pulse width modulated temperature(s) in PWM mode
3	VDD	Positive supply voltage
4	VSS	Negative supply voltage / Ground (0V) (connected to housing)

Datasheet Integrated Sensor TO46
Type HIM Jx2 Fxxx Gxxx



Features and Benefits

- Small size, low cost, integrated ASIC with analog outputs
- 4-pin metal housing TO46
- Operating range 2.7V to 5.5V , -40°C to 120°C
- Sensor gain preset to 4300 or 2150
- Integrated linear temperature reference with a sensitivity of typical 16mV/°C
- Large variety of available filter types for different application

Ordering Information

HIM -> Heimann thermopile sensor and ASIC in a TO46 housing
 Jx2 -> „J” standard cap TO46 ; „x” sensor chip (list) ; „2” ASIC STP1
 Fxxx -> application-specific filter type (list)
 Gxxx -> sensor gain preset G2150 or G4300

Sensor Chip Selection		
<i>Parameter</i>	<i>Sensor chip "1"</i>	<i>Sensor chip "2"</i>
Absorbing area	0.61x 0.61mm ²	1.2 x 1.2mm ²
Sensitivity	50 V/W	38 V/W
Voltage response	19 Vmm ² /W	55 Vmm ² /W
Resistance	85 kOhm	85 kOhms
Time constant	5ms	8ms
Filter Selection		
<i>Filter Type</i>	<i>Application</i>	<i>Specification</i>
F4.26-180	CO ₂ gas detection	NBP CWL 4.26µm HPB 180nm
F4.27-90	CO ₂ gas detection	NBP CWL 4.27µm HPB 90nm
F4.43-60	CO ₂ gas detection	NBP CWL 4.43µm HPB 60nm
F4.64-180	CO gas detection	NBP CWL 4.64µm HPB 180nm
F3.30-160	HC gas detection	NBP CWL 3.30µm HPB 160nm
F3.37-190	HC gas detection	NBP CWL 3.375µm HPB 190nm
F3.91-90	gas reference	NBP CWL 3.91µm HPB 90nm
F5.5	temperature detection	LWP Cut On 5.5µm
F8-14	temperature detection	BP HPP 8µm to 14µm

Please contact Heimann customer service for special filter requirements.

HEIMANN Sensor GmbH
 Grenzstr. 22
 D-01109 Dresden
 Rohrbergstr. 7
 D-65343 Eltville

Managing Director
 Dr. J. Schieferdecker
 Reg. at District Court
 Dresden HRB20692
 VAT-ID DE813444739

Internet: www.heimannsensor.com
 Mail: info@heimannsensor.com
 Phone 49 (0) 6123 60 50 30
 Fax 49 (0) 6123 60 50 39



Operating Conditions

Parameter	Typical Value	Unit	Condition
Supply voltage VDD	(2.7).. 3 .. 5..(5.5)	V	+Vs
Supply voltage VSS	0	V	-Vs , Ground
Supply current	1	mA	Without load
Open loop gain	90	dB	
Low pass frequency	240	Hz	ASIC
PSRR	>40	dB	
Output voltage range	0.15 .. (VDD-0.15)	V	
Start up time after POR	Max. 0.5	sec	Electrical start up
Noise voltage input related	45	nV/ $\sqrt{\text{Hz}}$	Output TPO; Sensor + ASIC
Zero input sensor signal	1.25	V	Output TPO
Sensor gain preset	4300 or 2150	V/V	Output TPO ; optional
Temp. ref. voltage at 25°C	1.45	V	Output TRO
Sensitivity temp. reference	16	mV/°C	Linear ; Output TRO
Field of view	70	degree	Sensor chip TP1
Operating temperature	-40.. 120	°C	

Pin Assignment

Pin No	Symbol	Description
1	VDD	Positive supply voltage
2	TPO	Amplified analog sensor output voltage
3	TRO	Analog temperature reference output voltage
4	VSS	Negative supply voltage / Ground (0V)




bottom view

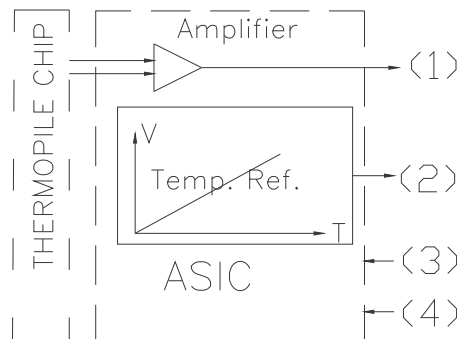


Datasheet Integrated Sensor TO46
Type HIM Jx2 Fxxx Gxxx



Dimensions

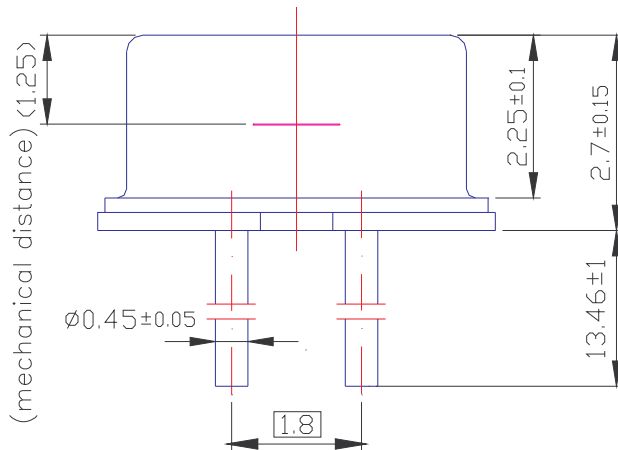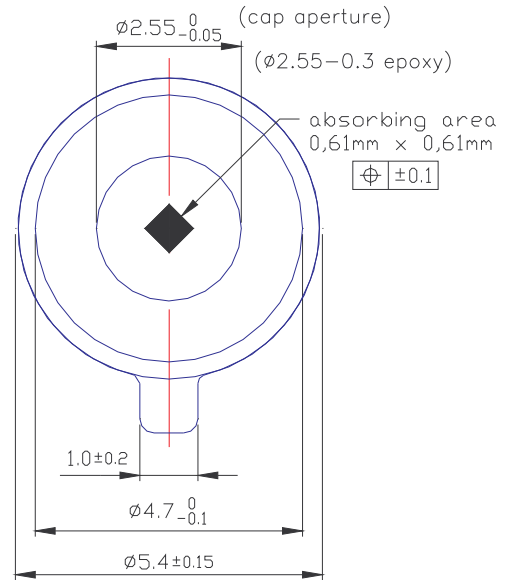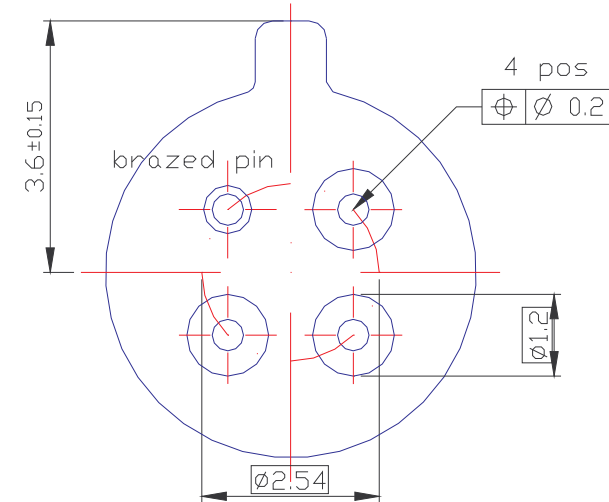

HIM J22 ..

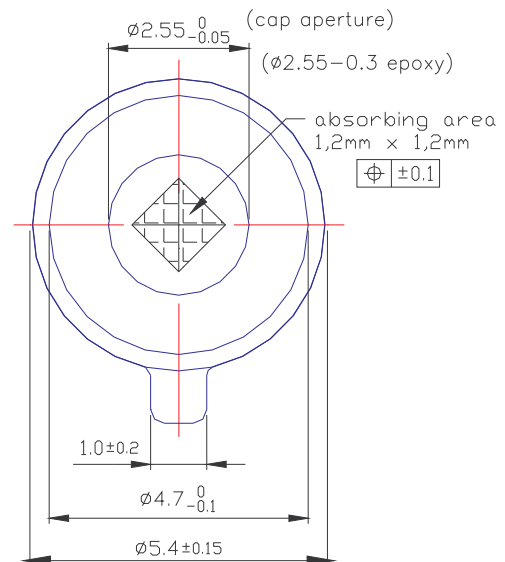

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden
Rohrbergstr. 7
D-65343 Eltville

Managing Director
Dr. J. Schieferdecker
Reg. at District Court
Dresden HRB20692
VAT-ID DE813444739

Internet: www.heimanssensor.com
Mail: info@heimanssensor.com
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Application Hints

Heimann integrated sensors are used for non-contact temperature measurements. A thermopile sensor and a signal conditioning circuit (ASIC) are integrated in the same housing. The thermopile sensor converts the temperature radiation of an object surface to an electrical signal (voltage) by thermocouples (Seebeck effect). The sensor output voltage is related to the object temperature and object emissivity (radiation) as well as to the sensor chip temperature (housing temperature) and surrounding temperature (radiation) by the following equation :

$$VS = K * \epsilon * (TO^n - TS^n) \quad \text{at } TA=TS$$

VS -> sensor output voltage ; K -> constant apparatus factor ; ϵ -> object emissivity ; TO -> object temperature ; TA -> ambient (surrounding) temperature ; TS -> sensor (housing) temperature ; n -> exponent to describe the temperature dependency of the signal voltage

The low noise amplifier of the ASIC transforms the sensor signal to a suitable voltage range. A temperature related voltage provided by the ASIC can be used to compensate ambient temperature drift effects.

A gas concentration can be measured by monitoring the absorption of an infrared light beam. The base equation for gas concentration measurement in the infrared way is Beer's law :

$$I=I(0)*\exp(-k*c*L)$$

I -> radiant flux at the point of measurement
I(0) -> base radiant flux of the test system without gas absorption
k -> constant (gas and filter specific)
L -> measuring distance
c -> gas concentration

The radiant flux is proportional to the output voltage of the sensor module :
 $U/U(0) \sim I/I(0)$.

A special infrared light source is used to generate the radiant heat. The infrared source needs to be pulsed to eliminate parasitic temperature influences. Don't hesitate to contact HEIMANN Sensor for support to use our long-time experience in infrared sensors and sensor modules.

Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.



**4-Pin Gas Sensor with
Integrated Signal
Conditioning**



Datasheet HEIMANN Sensor Integrated Module TO-Case for Gas Detection CO₂ - Type HIS A21 F4.26 4PIN

HEIMANN Sensor thermopile modules are designed for the non-contact temperature measurement based on infrared radiation. A thermopile sensor and a self-designed application specific integrated circuit (ASIC) is integrated in the sensor case. The ASIC is used for the sensor signal amplification and supplies a sensor temperature voltage.

Features of the specific sensor module type :

- CO₂ detection by 4% grade infrared narrow band pass filter
- 4-pin TO39-case
- Sensor amplification factor 5500
- Linear temperature reference with a sensitivity of 15mV/°C

Field of View

parameter	limits			unit	conditions
	Min	Typ	Max		
field of view		70		degree	

Filter Specification

parameter	minimum	typical	maximum	conditions
Center wavelength (CWL) at 90° angle of incidence	4.21 μm	4.26 μm	4.31 μm	
Half power bandwidth (HPB)	160 nm	180 nm	200 nm	
Peak transmittance	70%			
Average transmittance from visual to band pass region			0.1%	
Peak transmission from visual to band pass region			1%	
Peak transmittance from band pass region to 8 μm			1%	
Base material		Silicon		

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



**4-Pin Gas Sensor with
Integrated Signal
Conditioning**



Datasheet HEIMANN Sensor Integrated Module TO-Case for Gas Detection CO₂ - Type HIS A21 F4.26 4PIN

Operating Conditions

<i>Parameter</i>	<i>Typical Value</i>	<i>Unit</i>	<i>Condition</i>
Supply voltage VDD	4.5 .. 5 .. 5.5	V	+Vs
Supply voltage VSS	0	V	-Vs , Ground
Supply current	1 .. 1.5 .. 2	mA	Without load
Output voltage range	0.3 .. VDD-0.3	V	
Start up time after POR	Max. 0.5	sec	Electrical start up
Sensor absorbing area	1.2 x 1.2	mm ²	Type TP2
Sensor amplification	5500		Output AOT
Response time sensor	10	msec	t/T = 63%
Temperature reference voltage at 25°C	1.225	V	output AOR
Sensitivity temperature reference	15	mV/°C	Linear ; output AOR
Operating temperature	-20.. 120	°C	

Pin / Device Configuration

<i>Pin No.</i>	<i>Symbol</i>	<i>Description</i>
1	AOT	Amplified analog sensor output voltage
2	AOR	Analog temperature reference output voltage
3	VDD	Positive supply voltage (+5V)
4	VSS	Negative supply voltage / Ground (0V)

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com




**4-Pin Gas Sensor with
Integrated Signal
Conditioning**

HEIMANN
Sensor
HEIMANN SENSOR GMBH

Datasheet HEIMANN Sensor Integrated Module TO-Case for Gas Detection CO₂ - Type HIS A21 F4.26 4PIN

Dimensions / Pin Assignment

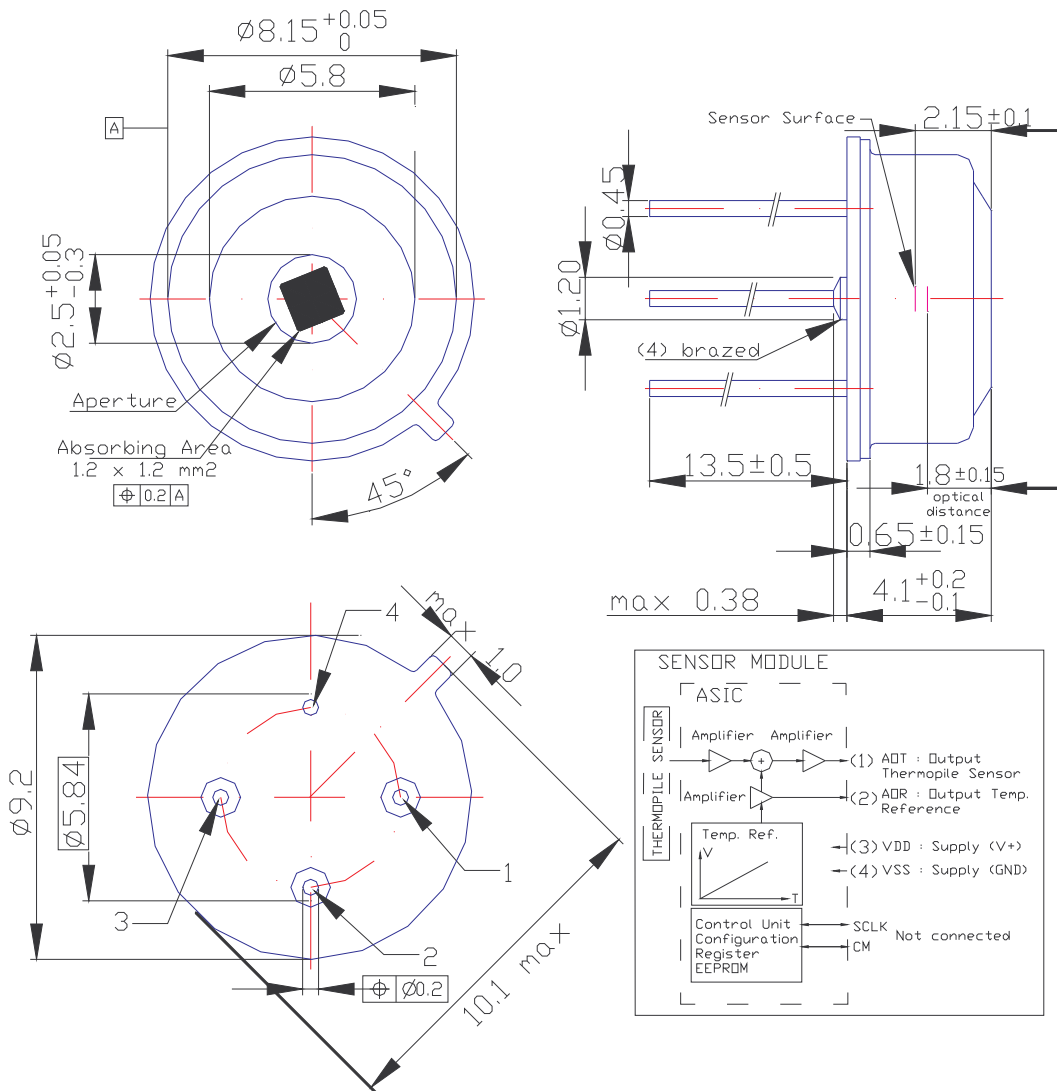

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



**4-Pin Gas Sensor with
Integrated Signal
Conditioning**

HEIMANN
Sensor
HEIMANN SENSOR GMBH

Datasheet HEIMANN Sensor Integrated Module TO-Case for Gas Detection CO₂ - Type HIS A21 F4.26 4PIN

Application Hints

The gas concentration can be measured by monitoring the absorption of an infrared light beam. The base equation for gas concentration measurement in the infrared way is Beer's law :

$$I=I(0)*\exp(-k*c*L)$$

I -> radiant flux at the point of measurement

I(0) -> base radiant flux of the test system without gas absorption

k -> constant (gas and filter specific)

L -> measuring distance

c -> gas concentration

The radiant flux is proportional to the output voltage of the sensor module :

$$U/U(0) \sim I/I(0) .$$

A special infrared light source is used to generate the radiant heat. The infrared source needs to be pulsed to eliminate parasitic temperature influences.

The temperature reference output (housing temperature) of the sensor module can be used to compensate ambient temperature drift effects.

Don't hesitate to contact HEIMANN Sensor for support to use our long-time experience in infrared sensors and sensor modules.

Mischa Schulze	Tel.	+49 (0)6123 605032
	Fax	+49 (0)6123 605039
	e-mail	schulze@heimannsensor.com

Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



6-Pin TO Sensor with Integrated Signal Conditioning



Datasheet HEIMANN Sensor Integrated Module TO-Case Type HIS-Ax1-F8-14


General information about HIS models are described in
“General Datasheet HIS” .

Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

Filter Specification

<i>parameter</i>	<i>minimum</i>	<i>typical</i>	<i>maximum</i>
Cot on wavelength at half power point	7.8 μ m	8 μ m	8.2 μ m
Cut off wavelength at half power point	13.5 μ m	14 μ m	14.5 μ m
Average transmission from 9 μ m to 13 μ m	70%		
Average transmission from visual to band pass			1%
Average transmission from band pass to 20 μ m			1%

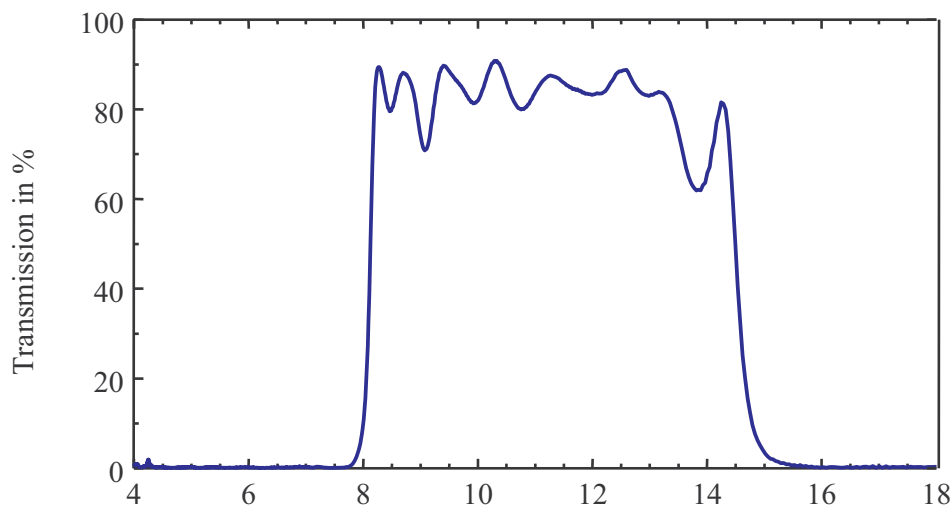

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



6-Pin TO Sensor with Integrated Signal Conditioning



Datasheet HEIMANN Sensor Integrated Module TO-Case Type HIS-Ax1-F8-14 Operating Conditions

Parameter	Typical Value	Unit	Condition
Supply voltage VDD	4.5 .. 5 .. 5.5	V	+Vs
Supply voltage VSS	0	V	-Vs , Ground
Supply current	1 .. 1.5 .. 2	mA	Without load
Output voltage range	0.3 .. VDD-0.3	V	
Start up time after POR	Max. 0.5	sec	Electrical start up
Sensor absorbing area	0,6 x 0,6	mm ²	Type TP2
Sensor amplification	150 .. 5500		Output AOT , preadjusted
Response time sensor	5	msec	t/T = 63%
Temperature reference voltage at 25°C	1.225	V	Output AOR
Sensitivity temperature reference	15 (10 .. 16)	mV/°C	Linear ; output AOR ; not internal compensated (internal compensated)
Field of view	70	degree	
Operating temperature	-20.. 120	°C	

Pin / Device Configuration

Pin No.	Symbol	Description
1	VDD	Positive supply voltage (+5V)
2	VSS	Negative supply voltage / Ground (0V)
3	AOT	Amplified analog sensor output voltage
4	AOR	Analog temperature reference output voltage
5	SCLK	Adjustment mode only – serial clock input
6	CM	Adjustment mode only – programming mode selection




6-Pin TO Sensor with Integrated Signal Conditioning



Datasheet HEIMANN Sensor Integrated Module TO-Case Type HIS-Ax1-F8-14

Dimensions / Pin Assignment

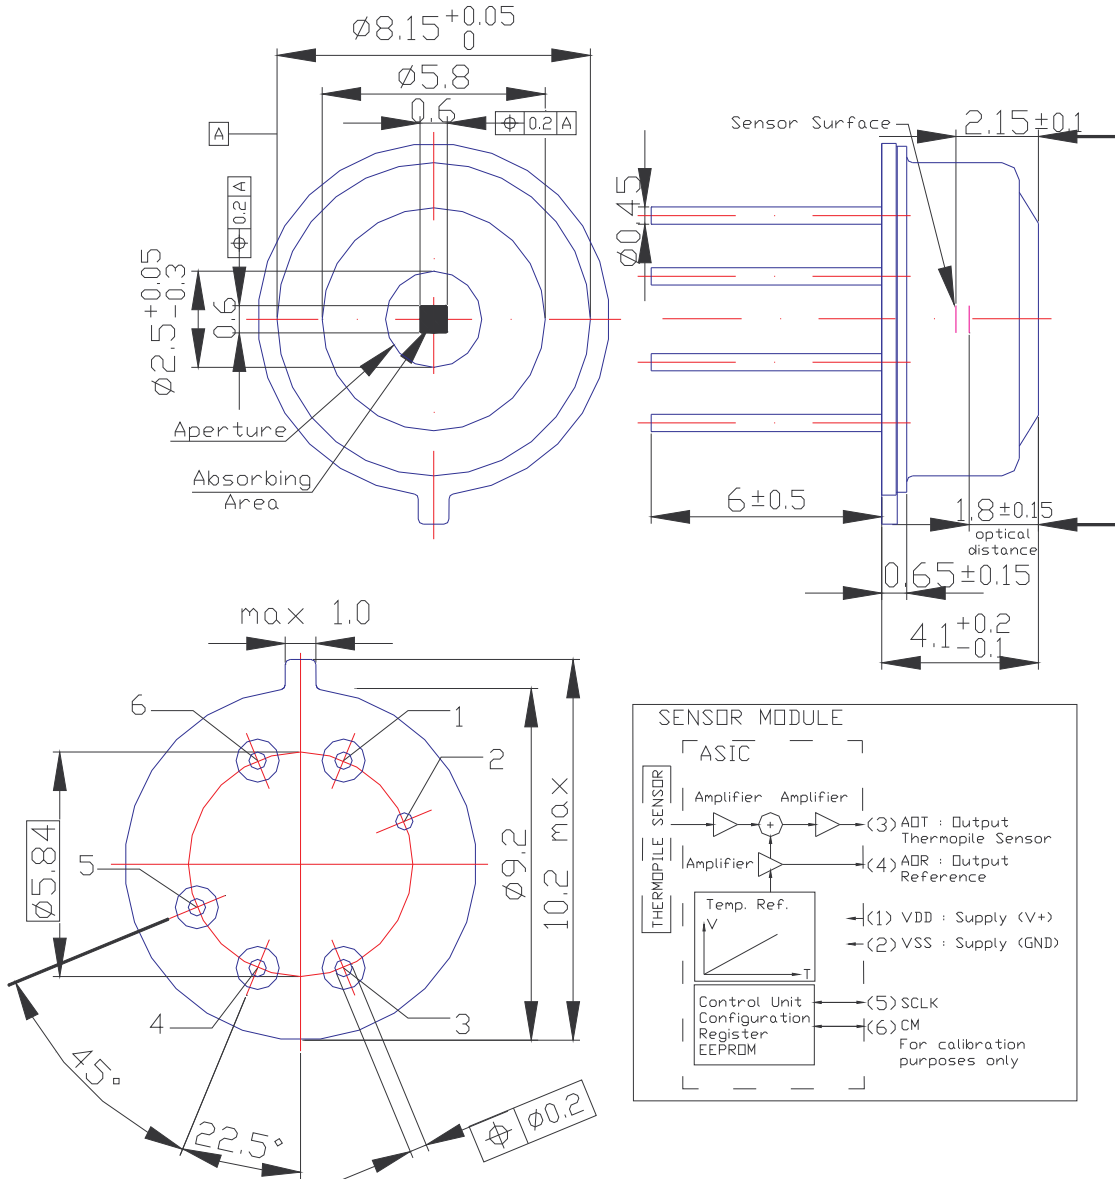

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HMS Z11 F5.5
Author(s): W. Leneke, M. Simon	Rev.: R 04 / 15.12.2008	Page 1 of 7

Specification Thermopile Sensor

HMS Z11 F5.5

Part No. 1018

R 04

Author(s):

W. Leneke, M. Simon

Revision History

Version	Date	Remarks
R 01	29.08.2005	1. Draft of HEIMANN Sensor GmbH
R 02	27.02.2006	Update packing
R 03	30.08.2006	Update drawing
R 04	15.12.2008	Update drawing

TABLE OF CONTENTS

1. Purpose, Scope	2
2. Absolute Maximum Ratings	2
3. General and electro-optical Parameter Thermopile	3
4. General and Electrical Parameter Thermistor.....	4
5. Filter Characteristics.....	5
6. Drawing and Pin Assignment.....	6
7. Packing.....	6
8. General Directions for Further Processing	7
9. Liability.....	7

1. Purpose, Scope

The new thermopile infrared sensor from Heimann Sensor, comprising a new type CMOS compatible sensor chip plus a thermistor reference chip, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The sensor meets the requirements of the European Union RoHS (Regulation of Hazardous Substances) Directive.

The sensor will be available in standard transistor outline packages in different sizes, equipped with an IR transmitting filter window (transmission curve as shown below).


2. Absolute Maximum Ratings

<i>Parameter</i>	<i>Symbol</i>	<i>Limits</i>			<i>Units</i>	<i>Conditions</i>
		<i>Min</i>	<i>Typ.</i>	<i>Max</i>		
storage temperature		-40		100	°C	
operating temperature		-20		100	°C	

3. General and electro-optical Parameter Thermopile

Parameter	Symbol	Limits			Units	Conditions
		Min	Typ.	Max		
element size			0.6*0.6		mm ²	absorbing area
field of view	FOV		94		degree	50% intensity within FOV, see graph
resistance	R _{TS}	69	86	112	kΩ	-40 °C to 100 °C
voltage response		9	11.5	16	Vmm ² /W	Filter F5.5, 100 °C, 1Hz
voltage sensitivity	S _V	25	35	45	V/W	Filter F5.5, 100 °C, 1Hz
time constant	τ		6	10	ms	
noise voltage	V _{RMS}		38		nV/√Hz	r.m.s., 25 °C
detectivity	D*		5.6*10 ⁷		cm√Hz/W	Filter F5.5, 100 °C, 1Hz
Insulation resistance	R _{iso}	5			GΩ	10V, 25 °C, 60% r.h., between pin 1 or 2 and 4 (ground)

Field Of View

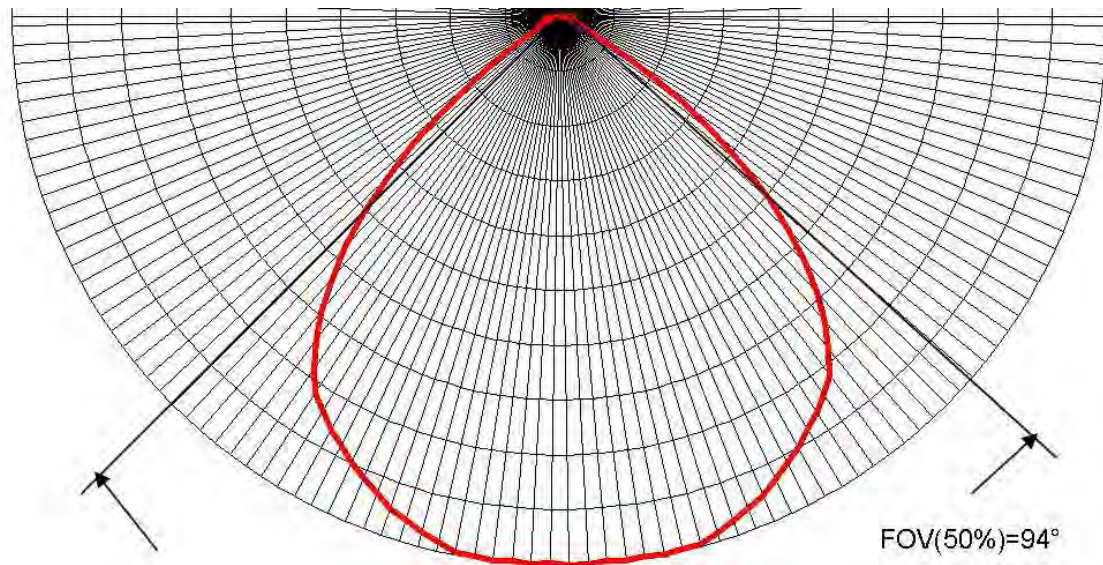


4. General and Electrical Parameter Thermistor

Type	Thermistor 100k Ω					
Parameter	Symbol	Limits			Units	Conditions
		Min	Typ.	Max		
resistance	R _{TH}	95	100	105	k Ω	25 °C
BETA-value	β	3900	3940	3980	K	25 °C/50 °C

T / °C	Rth_min / Ohm	Rth_nom / Ohm	Rth_max / Ohm
-30	1557900	1655000	1753100
-25	1163320	1234000	1306680
-20	875826	928700	981974
-15	665010	704500	744190
-10	508730	538500	568370
-5	392108	414600	437292
0	304466	321700	338934
5	238072	251400	264728
10	187444	197800	208056
15	148568	156600	164632
20	118404	124800	131096
25	95000	100000	105000
30	76537	80630	84713
35	62032	65380	68738
40	50543	53310	56077
45	41386	43680	45984
50	34070	35980	37890
55	28174	29770	31366
60	23405	24750	26095
65	19536	20670	21804
70	16383	17340	18297
75	13788	14600	15422
80	11653	12350	13047
85	9890	10480	11080
90	8421	8930	9444
95	7197	7635	8076
100	6172	6551	6935


5. Filter Characteristics

Filter F5.5					
Parameter	Limits			Units	Conditions
	Min	Typ	Max		
average transmission	70			%	7.5µm to 13.5µm
average transmission			1	%	visual to 5µm
cut on	5.2	5.5	5.8	µm	25°C
filter thickness		0.525			
filter material	silicon coated				

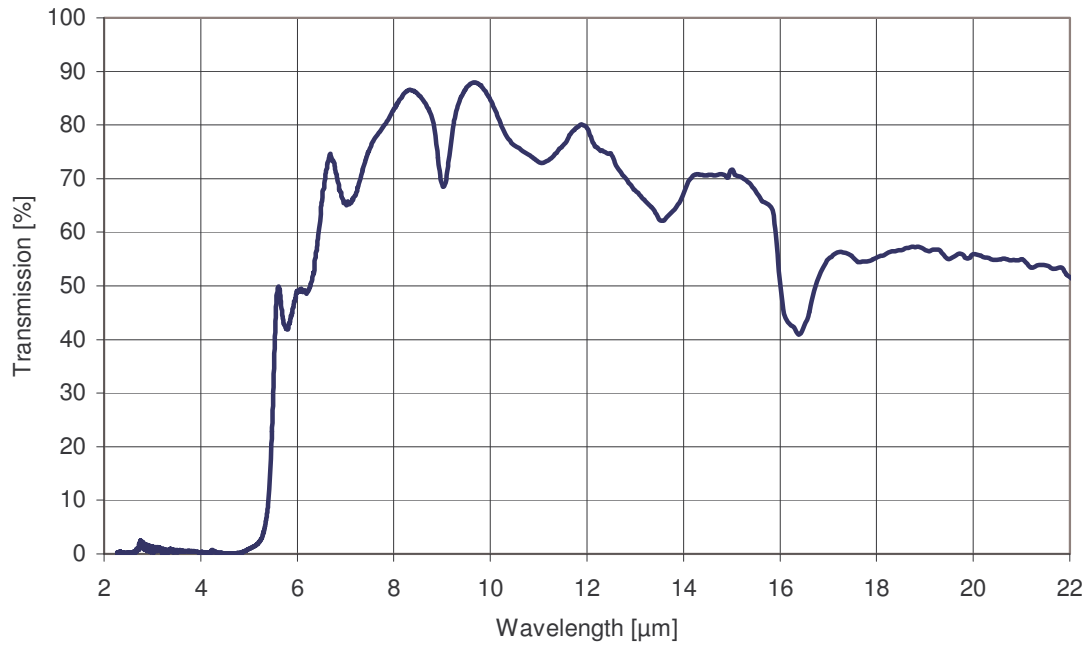

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HMS Z11 F5.5
Author(s): W. Leneke, M. Simon	Rev.: R 04 / 15.12.2008	Page 6 of 7

6. Drawing and Pin Assignment

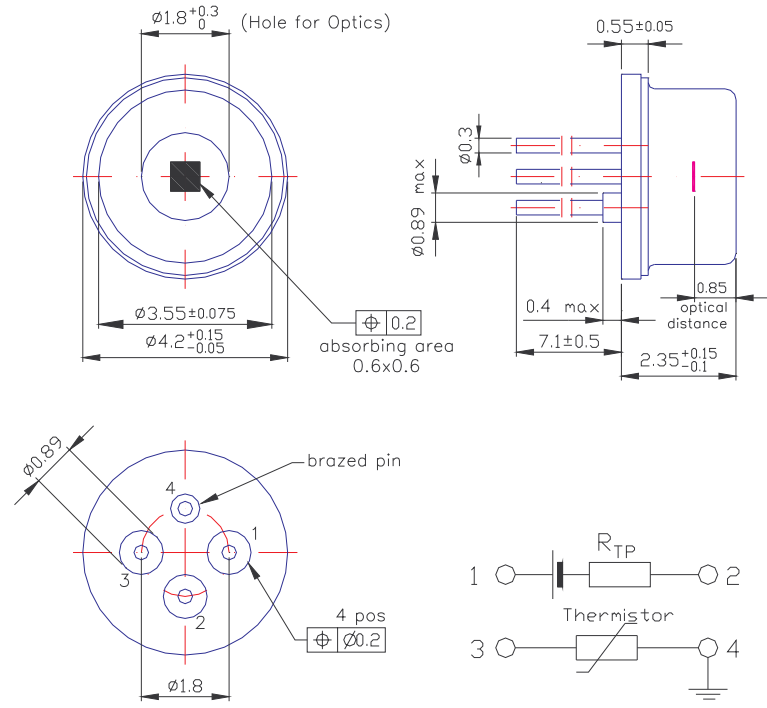


7. Packing

The thermopile sensors HMS Z11 F5.5 are packed in ESD save plastic packing tubes. Each packing tube contains 55 sensors and the tube ends are closed by soft rubber plugs.

Two labels stick on each packing tube:



Main dimensions of packing tube

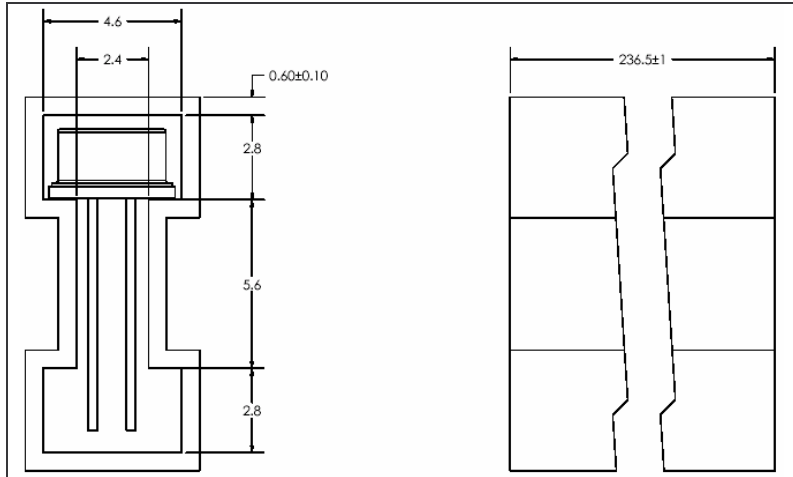

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HMS Z11 F5.5
Author(s): W. Leneke, M. Simon	Rev.: R 04 / 15.12.2008	Page 7 of 7

8. General Directions for Further Processing

Stresses above the absolute maximum ratings may cause damages to the device. The sensor can be damaged by electrostatic discharges. Please take appropriate precautions for the handling.

Do not expose the sensors to aggressive detergents. Windows may be cleaned with alcohol and cotton swab.

Wave soldering may be applied by a maximum temperature of 280 °C for a dwell time less than 10s. For hand soldering the maximum applicable temperature is 350 °C for a dwell time less than 3s. The minimum distance between the housing body and the liquid solder should be for 280 °C at least 0.6mm and for 350 °C at least 1.5mm. Avoid heat exposure to the top and the window of the detector. Reflow soldering is not recommended.

9. Liability

Important product or process changes require a customer release. Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.



Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Features

The HEIMANN Sensor thermopile module is designed for the non-contact temperature measurement of surfaces based on infrared radiation. A self-designed application specific integrated circuit is used for the sensor signal processing. The module can be supplied with or without internal compensation of the sensor-typical, physical-based ambient temperature drift.

The HEIMANN Sensor thermopile module HTIA-type-To can be supplied for different object temperature ranges characterized by the detectable object temperature „To“. The “type” in the nomenclature describes the sizes, optics and filter characteristics of the different versions.

- Thermopile sensor with integrated ASIC for signal processing
- 2 analog outputs for thermopile and reference signal
- Simple linear reference function for external compensation
- Small size by COB technology
- Fast sensor response time of 5 msec
- Various optics and filter available

Characteristics

Parameter	min/typ/max value	unit	condition
supply voltage	4.5 .. 5 .. 5.5	V	VDD
supply current	1 .. 1.4 .. 2	mA	without load
output voltage range	0.3 .. VDD-0.3	V	
output resistance	< 10	Ohm	$f < 100\text{Hz}$
output load	> 20	kOhm	for optimal operation
thermopile amplification	150 .. 5500		
object temperature range	-30...+500 (1000)	°C	dep. on meas.conditions
gradient temp. reference	10 .. 15 .. 16	mV/°C	linear function w/ 1.225V at 25°C
response time	4 .. 5 .. 10	ms	$t/T=63\%$; sensor
transmission range	Typ. lwp cut on 5.5 (filter list)	µm	long wavelength pass (options)
operating temperature	-40 to 120	°C	

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com




Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Schematic

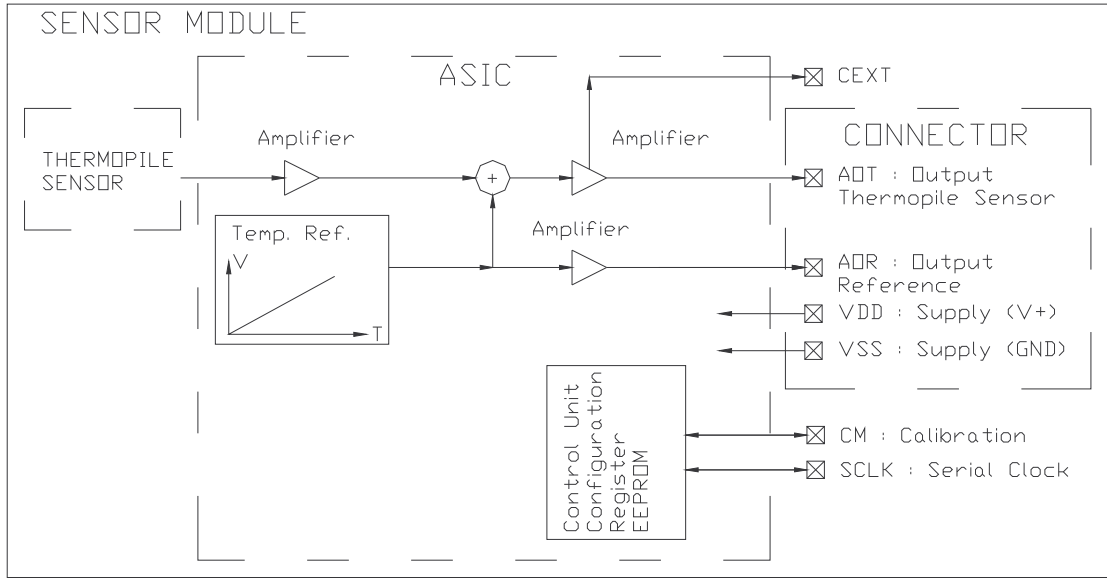

<i>connect</i>	<i>description</i>
AOR	analog output – temperature reference (AORt) or voltage reference (AORv) / digital input – instructions, addresses, data
V+	power supply – positive supply voltage
AOT	analog output – object temperature related output voltage - AOTc (amplified thermopile signal internal compensated by the temperature reference) - AOTu (amplified thermopile signal) / digital output - data
V-	power supply – negative supply voltage , ground
CM	calibration mode – selection between analog and digital mode
SCLK	serial clock input
<i>device</i>	<i>description</i>
Cap C1	optional ; connected to V+ and V-
Cap C2	optional ; connected to CEXT – low pass filter for the output AOT

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com




Fast Response
Small Size




Datasheet HEIMANN Sensor Integrated Module HTIA

Sample Signal Characteristics Sensor Output AOT

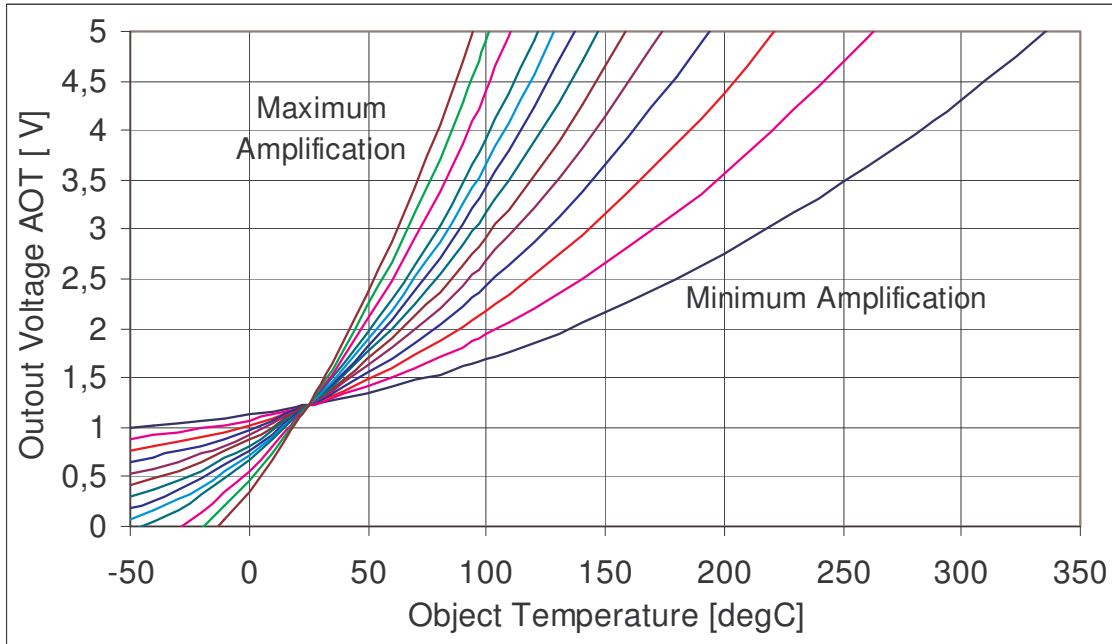

Sample Signal Characteristics Reference Output AOT

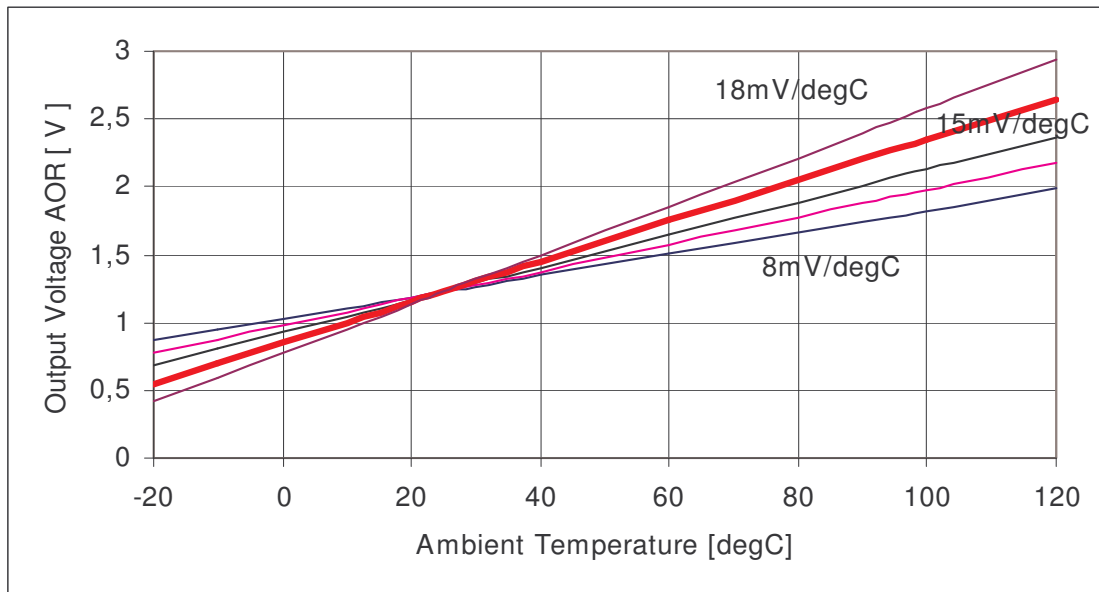

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Temperature Calculation and Compensation

The HEIMANN Sensor integrated module HTIA consists of a fast response thermopile sensor and an ASIC as specific integrated circuit for the signal processing and on chip calibration.

The thermopile sensor converts the temperature radiation of an object surface to an electrical signal (voltage) by thermocouples (Seebeck effect). The sensor output voltage is related to the object temperature and emissivity (radiation) as well as to the sensor chip temperature (housing temperature) and surrounding temperature (radiation) by the following equation :

$$V_S = K * \varepsilon * (T_{On} - T_{Sn}) \text{ at } T_A = T_S$$

V_S -> sensor output voltage

K -> constant apparatus factor

ε -> object emissivity



T_O -> object temperature

T_A -> ambient (surrounding) temperature

T_S -> sensor (housing) temperature

n -> exponent to describe the temperature dependency of the signal voltage

The equation is simplified by the hypothesis of equal ambient and sensor temperatures. The exponent „n“ has the theoretical value of „4“ based on physical laws. But in the application practice it is an empirically determined exponent value mostly in the range of 3 .. 4 . The knowledge of the housing temperature is necessary to get the right object temperature from the sensor voltage.

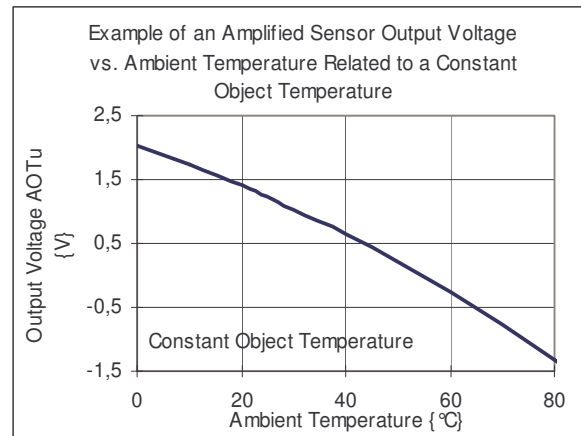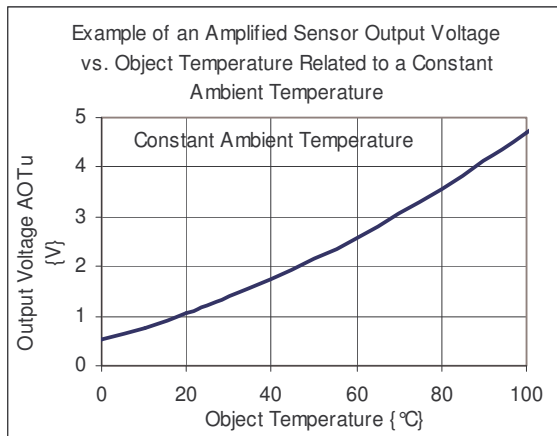

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size




Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Temperature Calculation and Compensation

The integrated sensor module HTIA is designed to detect the housing temperature and to convert the temperature to a voltage.

By the multi-functionality of the integrated sensor module HTIA it is possible to use that voltage for an internal (on chip) ambient temperature compensation which makes the output voltage of the sensor module widely independent from ambient temperature variations within a range of about 40° C. The achievable accuracy is shown in the picture.

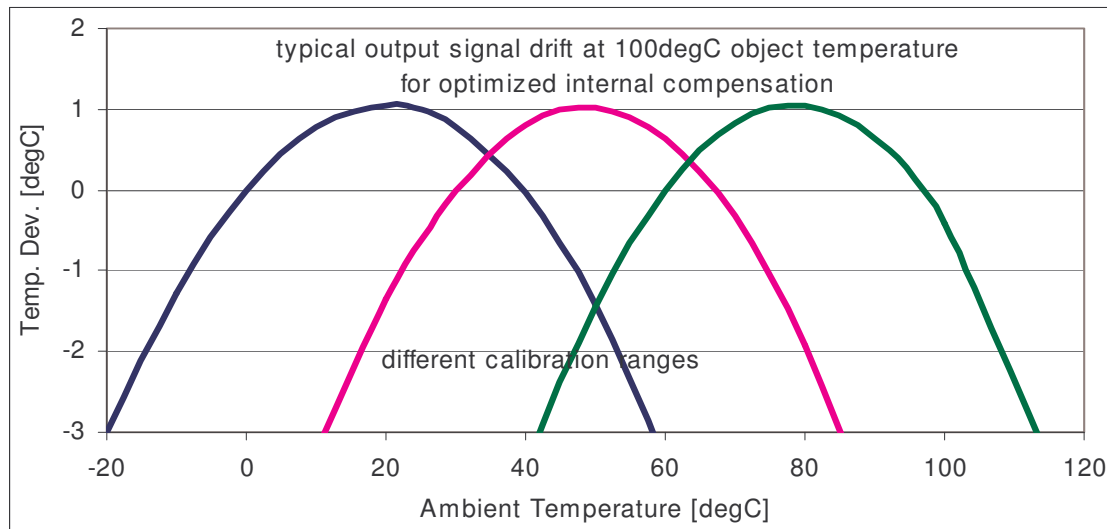

For higher accuracy requirements the multi-functional sensor module can output the amplified and calibrated sensor voltage separated from the linear on-chip temperature reference voltage. With it the ambient temperature compensation can be simply done combined with the object temperature calculation by the external microcontroller used in most applications. The following equations and procedures can be used for the calculation of the object temperature independent from the ambient temperature with sufficient accuracy for most applications.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Temperature Calculation and Compensation

Base Function

- Vobj (V): sensor object voltage
K : constant apparatus factor -> test certificate
 ε : emissivity of the object
Tobj (K): object temperature (Kelvin)
Tamb (K): sensor (ambient) temperature (Kelvin); The equation is simplified by the hypothesis of equal ambient Tamb and sensor temperatures Ts.
n: exponent, empirically determined, in sensor practice mostly in the range 3 to 4 -> test certificate

$$V_{obj} = K * \varepsilon * (T_{obj}^n - T_{amb}^n)$$

Tamb=Tsens

Experimental Determined Factors

In a first approximation the constant factor "K" and exponent "n" based on the Heimann Sensor measuring data can be used. In most cases an exponent of 4 is sufficient for the required temperature tolerance, which simplifies the calculation. The verification of the values is recommended by an application test.

$$K = \frac{V_{obj}}{\varepsilon * (T_{obj}^n - T_s^n)}$$

Function for Object Temperature Calculation with Temperature Compensation

$$T_{obj} = \sqrt[n]{\frac{V_{obj}}{K * \varepsilon} + T_s^n}$$

The uncompensated sensor output voltage $V(AOT_u)$, measured at the output AOT, is containing the object signal value V_{obj} and the reference voltage V_{ref} :

$$V_{obj} = V\{AOT_u\} - V_{ref}$$

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size



Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Temperature Calculation and Compensation

Internal temperature gradients generate additional offset voltages V_{offs} depending on application influences :

$$V_{obj} = V\{AOTu\} - V_{ref} + V_{offs}$$

The temperature generated offset can be determined by an output signal test at $T_{obj} = T_{amb}$.

Calculation of the ambient (sensor) temperature using the sensor output AOR :

$$T_s = 1/S_T * (V\{AORt\} - V\{AORt@25\}) + 298.15K$$

T_s : sensor temperature

S_T (V/K): temperature sensitivity of the internal temperature reference
-> test certificate

$V\{AORt\}$ (V): measured temperature output voltage at output AOR

$V\{AORt@25\}$ (V): temperature output voltage at 25° C (298.15K)
-> test certificate

For first tests the object temperature calculation can be done by the mentioned calculation procedure using an application factor and exponent derived from the Heimann Sensor sample data and based on Heimann Sensor test equipment. All test data are typical related to a defined emissivity of 100%. The emissivity variation can be considered by the factor ϵ .

Another ways for the object temperature calculation with ambient temperature compensation can be performed using look-up tables or polynomial regression equations.

But by the large number of physical affects influencing the non-contact temperature measurement, it is difficult to have the best initial adjustment for the different applications. In detail the measuring is influenced by the object emissivity and its variation, optical ratios (field of view, object size, measuring distances), the ambient and object temperature ranges, the adjustment of the ambient temperature compensation as well as unstable (dynamic) ambient temperature conditions. For that reason the object and ambient temperature to output voltage relation needs to be measured on application conditions.

For most applications an optimized solution can be found and fixed for a serial production. Don't hesitate to contact HEIMANN Sensor for support to use our long-time experience in infrared sensors and sensor modules.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size

HEIMANN
Sensor
HEIMANN SENSOR GMBH

Datasheet HEIMANN Sensor Integrated Module HTIA

Application Hints – Handling

Thermal stress to the sensor module can cause temporary measuring deviations. That deviations are generated by internal temperature differences in the sensor package. The sensor detects the temperature differences until the system is thermal stabilized. Recommended measures to reduce the influence of temperature stress to the output signal are

- to fix the sensor module at the printed circuit board only
- to thermal isolate the sensor package to the environment
- to place the sensor chip far from parasitic thermal sources

Stresses above the absolute maximum ratings may cause damages to the device. Precautions should be taken to avoid voltages 0.3V beyond the supply voltages to all inputs and outputs, which may result in latch-up effects (low impedance state with excessive currents). A limitation of the input current to maximum 5mA can avoid latch-up effects.

The allowed duration of output short circuits are indefinite. Continuous short-circuits to ground might cause permanent damage to the device.

Reversed polarity of power supply may result in a destroyed unit.

Do not expose the sensors to aggressive detergents.

Windows may be cleaned with alcohol and cotton swab.

Capacitive loads which are applied directly to the outputs reduce the loop stability margin. A resistive isolation should be used if larger load capacitances must be driven.

The module can be damaged by electrostatic discharges. Please take appropriate precautions for the handling.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com



Fast Response
Small Size

HEIMANN
Sensor
HEIMANN SENSOR GMBH

Datasheet HEIMANN Sensor Integrated Module HTIA

Ordering Information

The sensor modules can be ordered by the following nomenclature :

HTIA-"type"+"U" or "C"-To , e.g. HTIA-DU-100

HTIA -> HEIMANN Sensor thermopile module with integrated circuit and analog outputs
type -> letter describing the size and optics according to the datasheet
"U" or "C" -> stands for separated or internal compensated output voltage AOT
To -> maximum object temperature describing the amplification adjustment
The long wavelength pass filter with 5.5 μ m cut on is used as standard filter type for all types.

Please give following information :

- object and ambient temperature ranges
- object (surface) emissivity
- required temperature accuracy and resolution
- required optics (field of view or object size and measuring distance)
- special environmental conditions
- requested speed of response
- different filter transmission

Don't hesitate to contact us , if the sensor modules show problems in your special application.

Liability Information

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance.

Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

HEIMANN Sensor GmbH
Grenzstr. 22
D-01109 Dresden

Contact / Customer Support
Phone 49 (0) 6123 60 50 30
Fax 49 (0) 6123 60 50 39

Internet
www.heimannsensor.com
mail: info@heimannsensor.com

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HTS A10 F8-14-HT
Author(s): W. Leneke, M. Simon	Rev.: R 01 / 14.05.2008	Page 1 of 4

Specification Thermopile Sensor (preliminary)
HTS A10 F8-14-HT
Part No. 1050

R 01

Author(s):

W. Leneke, M. Simon

Revision History

Version	Date	Remarks
R 01	14.05.2008	Draft of HEIMANN Sensor GmbH

TABLE OF CONTENTS

1. Purpose, Scope	2
2. Absolute Maximum Ratings	2
3. General and Electrical Parameter Thermopile	2
4. Filter Characteristics	3
5. Drawing and Pin Assignment	4
6. General Directions for Further Processing	4
7. Liability	4

1. Purpose, Scope

The new thermopile infrared sensor from Heimann Sensor, comprising a new type CMOS compatible sensor chip plus a thermistor reference chip, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The sensor meets the requirements of the European Union RoHS (Regulation of Hazardous Substances) Directive.

The sensor will be available in a standard transistor outline package, equipped with an IR transmitting filter window (transmission curve as shown below).

2. Absolute Maximum Ratings

<i>Parameter</i>	<i>Symbol</i>	<i>Limits</i>			<i>Units</i>	<i>Conditions</i>
		<i>Min</i>	<i>Typ.</i>	<i>Max</i>		
storage temperature		-40		185	°C	
operating temperature		-20		180	°C	


3. General and Electrical Parameter Thermopile

<i>Parameter</i>	<i>Symbol</i>	<i>Limits</i>			<i>Units</i>	<i>Conditions</i>
		<i>Min</i>	<i>Typ.</i>	<i>Max</i>		
filling gas						dry nitrogen
element size			0.6*0.6		mm ²	absorbing area
field of view			75			degree
resistance	R _{TS}	69	86	112	kΩ	-40°C to 185°C
signal voltage	V _S		600		μV	Filter F8–14 μm, T _{BB} 100°C, f = 4.5 Hz
time constant	τ		15		ms	t ₉₀
noise voltage	V _{RMS}		38		nV/√Hz	r.m.s., 25°C
detectivity	D*		2.9*10 ⁷		cm√Hz/W	Filter F8–14 μm


4. Filter Characteristics

Filter F8-14					
Parameter	Limits			Units	Conditions
	Min	Typ	Max		
average transmission	75			%	9μm to 13μm
average transmission			1	%	visual to pass, pass to 20μm
half power point on	7.8	8	8.2	μm	25°C
Half power point off	13.5	14	14.5	μm	25°C
filter thickness		0.525			
filter material	coated silicon				

Typical Transmission 8μm to 14μm Filter

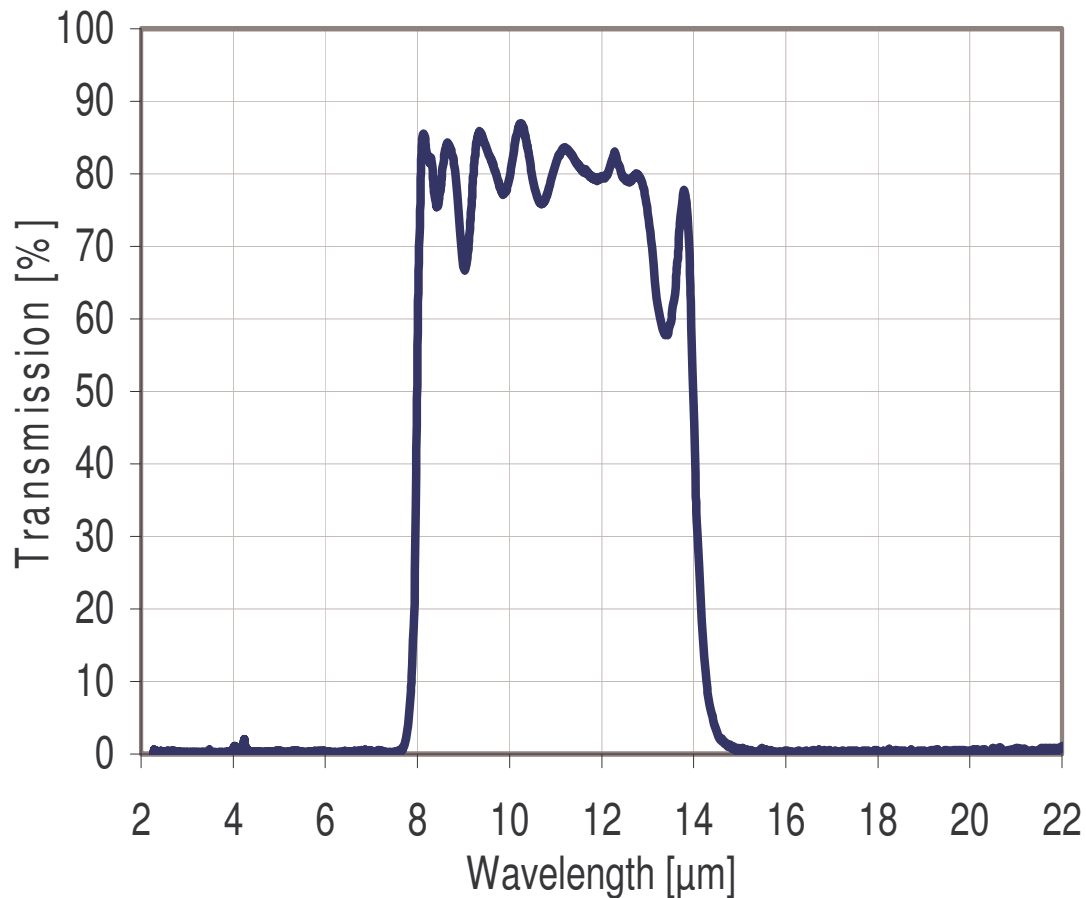

5. Drawing and Pin Assignment

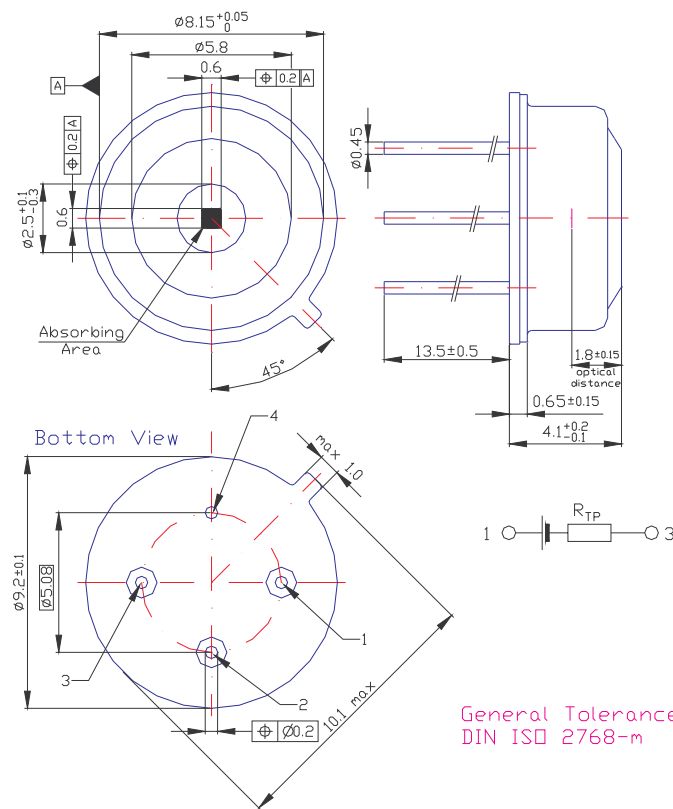

General Tolerances:
DIN ISO 2768-m

6. General Directions for Further Processing

Stresses above the absolute maximum ratings may cause damages to the device. The sensor can be damaged by electrostatic discharges. Please take appropriate precautions for the handling.

Do not expose the sensors to aggressive detergents. Windows may be cleaned with alcohol and cotton swab.

For hand soldering the maximum applicable temperature is 215°C for a dwell time less than 10s.

Any temperature above 215°C will lead to an irreversible damage of the thermopile sensor.

Avoid heat exposure to the top and the window of the detector. Reflow and wave soldering is not recommended.

7. Liability

Important product or process changes require a customer release. Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26
Author(s): W. Leneke, J. Schieferdecker	Rev.: R 0.1 / 04.08.2005	Page 1 of 6

Specification Thermopile Sensor HTS-E21-F3.91/F4.26

R 0.1

Author(s):

W. Leneke, M. Simon

Revision History

Version	Date	Remarks
R 0.1	04.08.2005	1. Draft of HEIMANN Sensor GmbH

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26
Author(s): W. Leneke, J. Schieferdecker	Rev.: R 0.1 / 04.08.2005	Page 2 of 6

1. Purpose, Scope

The new thermopile infrared sensor from Heimann Sensor, comprising a new type CMOS compatible sensor chip plus a thermistor reference chip, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability.

The sensor will be available in standard transistor outline packages in different sizes, equipped with an IR transmitting filter window (transmission curve as shown below).

2. Absolute Maximum Ratings

Parameter	Symbol	Limits			Units	Conditions
		Min	Typ.	Max		
storage temperature		-40		120	°C	
operating temperature		-20		120	°C	

3. General and Electrical Parameter Thermopile

Parameter	Symbol	Limits			Units	Conditions
		Min	Typ.	Max		
element size			1.2*1.2		mm ²	absorbing area
resistance	R _{TP}	69	84	112	kΩ	-40°C to 100°C
TC of resistance			0.02		%/K	25°C
signal voltage channel 3.9	V _S	60	90	115	μV	Heimann Sensor test set-up "F1": IR source, 6V, 3Hz, distance 15mm
signal voltage channel 4.26	V _S	95	120	145	μV	Heimann Sensor test set-up "F1": IR source, 6V, 3Hz, distance 15mm
noise voltage	V _{RMS}		37		nV/√Hz	r.m.s., 25°C
time constant	τ		10	13	ms	

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26
Author(s): W. Leneke, J. Schieferdecker	Rev.: R 0.1 / 04.08.2005	Page 3 of 6

4. General and Electrical Parameter Thermistor

Type	Thermistor 100k Ω					
Parameter	Symbol	Limits			Units	Conditions
		Min	Typ.	Max		
resistance	R _{TH}	95	100	105	k Ω	25°C
BETA-value	β	3900	3940	3980	K	25°C/50°C


T / °C	Rth_min / Ohm	Rth_nom / Ohm	Rth_max / Ohm
-30	1557900	1655000	1753100
-25	1163320	1234000	1306680
-20	875826	928700	981974
-15	665010	704500	744190
-10	508730	538500	568370
-5	392108	414600	437292
0	304466	321700	338934
5	238072	251400	264728
10	187444	197800	208056
15	148568	156600	164632
20	118404	124800	131096
25	95000	100000	105000
30	76537	80630	84713
35	62032	65380	68738
40	50543	53310	56077
45	41386	43680	45984
50	34070	35980	37890
55	28174	29770	31366
60	23405	24750	26095
65	19536	20670	21804
70	16383	17340	18297
75	13788	14600	15422
80	11653	12350	13047
85	9890	10480	11080
90	8421	8930	9444
95	7197	7635	8076
100	6172	6551	6935

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26
Author(s): W. Leneke, J. Schieferdecker	Rev.: R 0.1 / 04.08.2005	Page 4 of 6

5. Filter Characteristics


Filter F3.91					
Parameter	Limits			Units	Conditions
	<i>Min</i>	<i>Typ.</i>	<i>Max</i>		
Center wavelength (CWL)	3.87	3.91	3.95	µm	
Half power bandwidth (HPB)	70	90	110	nm	
HPB/CWL		2.3		%	
Peak transmittance	76			%	
Blocking		$T_{\text{average}} < 0.1\%$		%	from UV to band pass
		$T_{\text{peak}} < 1\%$		%	from UV to band pass
		$T_{\text{peak}} < 1\%$		%	from band pass to 12µm

Filter F4.26					
Parameter	Limits			Units	Conditions
	<i>Min</i>	<i>Typ.</i>	<i>Max</i>		
Center wavelength (CWL)	4.05	4.26	4.51	µm	
Half power bandwidth (HPB)	160	180	200	nm	
HPB/CWL		4.2		%	
Peak transmittance	73			%	
Blocking		$T_{\text{average}} < 0.1\%$		%	from UV to band pass
		$T_{\text{peak}} < 1\%$		%	from UV to band pass
		$T_{\text{peak}} < 1\%$		%	from band pass to 12µm

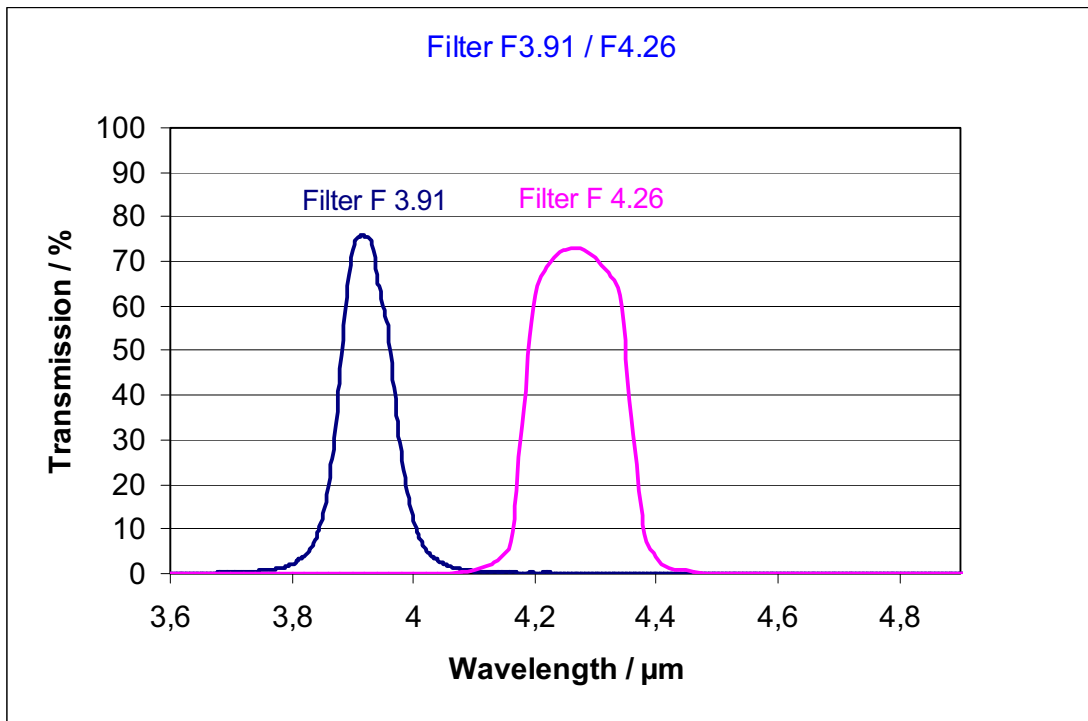

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HTS-E21-F3.91/F4.26
Author(s): W. Leneke, J. Schieferdecker	Rev.: R 0.1 / 04.08.2005	Page 6 of 6

6. Drawing and Pin Assignment

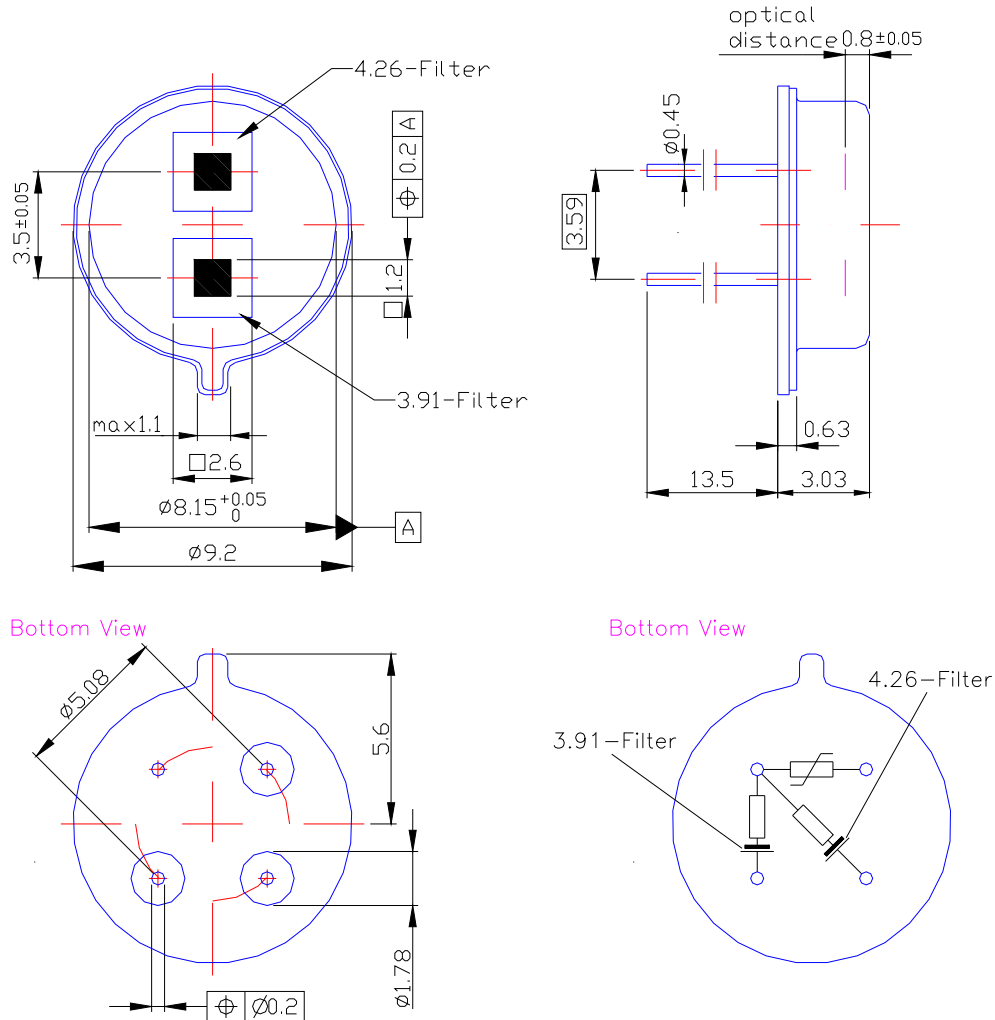

7. Liability

Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.

HEIMANN Sensor GmbH		Product Specification: Thermopile Sensor HTS A10 F8-14-HT
Author(s): W. Leneke, M. Simon	Rev.: R 01 / 14.05.2008	Page 1 of 4

Specification Thermopile Sensor (preliminary)
HTS A10 F8-14-HT
Part No. 1050

R 01

Author(s):

W. Leneke, M. Simon

Revision History

Version	Date	Remarks
R 01	14.05.2008	Draft of HEIMANN Sensor GmbH

TABLE OF CONTENTS

1. Purpose, Scope	2
2. Absolute Maximum Ratings	2
3. General and Electrical Parameter Thermopile	2
4. Filter Characteristics.....	3
5. Drawing and Pin Assignment.....	4
6. General Directions for Further Processing	4
7. Liability.....	4

1. Purpose, Scope

The new thermopile infrared sensor from Heimann Sensor, comprising a new type CMOS compatible sensor chip plus a thermistor reference chip, features good sensitivity, small temperature coefficient of sensitivity as well as high reproducibility and reliability. The sensor meets the requirements of the European Union RoHS (Regulation of Hazardous Substances) Directive.

The sensor will be available in a standard transistor outline package, equipped with an IR transmitting filter window (transmission curve as shown below).

2. Absolute Maximum Ratings

Parameter	Symbol	Limits			Units	Conditions
		Min	Typ.	Max		
storage temperature		-40		185	°C	
operating temperature		-20		180	°C	


3. General and Electrical Parameter Thermopile

Parameter	Symbol	Limits			Units	Conditions
		Min	Typ.	Max		
filling gas						dry nitrogen
element size			0.6*0.6		mm ²	absorbing area
field of view			75			degree
resistance	R _{TS}	69	86	112	kΩ	-40°C to 185°C
signal voltage	V _S		600		μV	Filter F8–14 μm, T _{BB} 100°C, f = 4.5 Hz
time constant	τ		15		ms	t90
noise voltage	V _{RMS}		38		nV/√Hz	r.m.s., 25°C
detectivity	D*		2.9*10 ⁷		cm√Hz/W	Filter F8–14 μm


4. Filter Characteristics

Filter F8-14					
Parameter	Limits			Units	Conditions
	Min	Typ	Max		
average transmission	75			%	9μm to 13μm
average transmission			1	%	visual to pass, pass to 20μm
half power point on	7.8	8	8.2	μm	25°C
Half power point off	13.5	14	14.5	μm	25°C
filter thickness		0.525			
filter material	coated silicon				

Typical Transmission 8μm to 14μm Filter

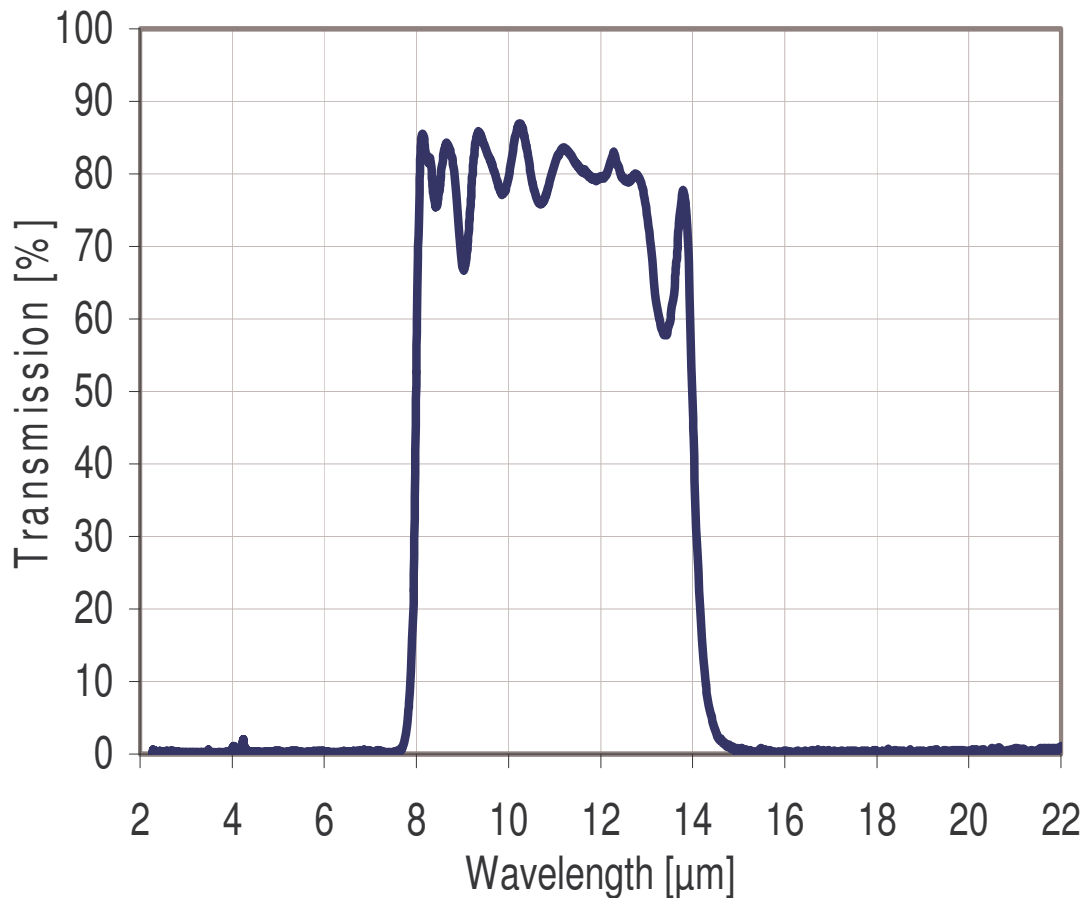

5. Drawing and Pin Assignment

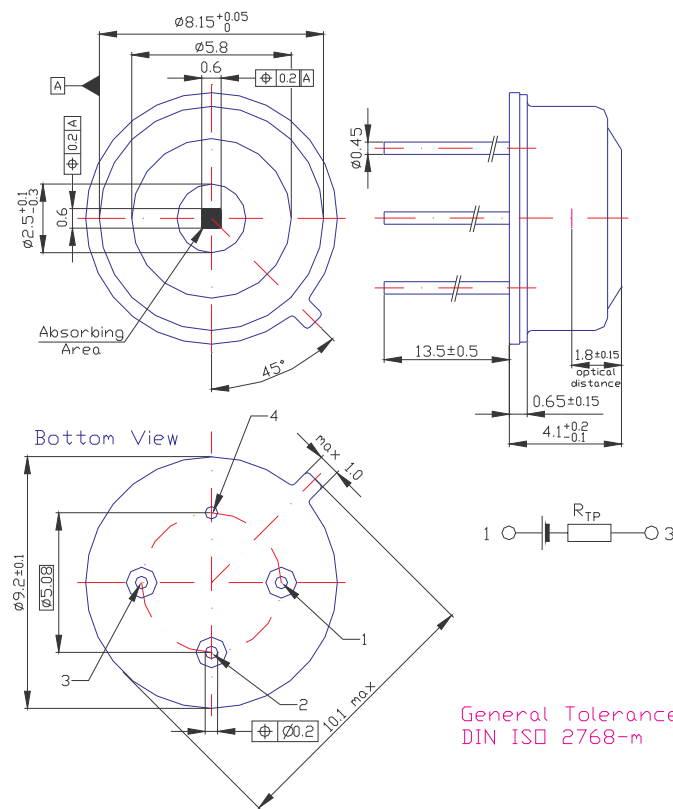

6. General Directions for Further Processing

Stresses above the absolute maximum ratings may cause damages to the device. The sensor can be damaged by electrostatic discharges. Please take appropriate precautions for the handling.

Do not expose the sensors to aggressive detergents. Windows may be cleaned with alcohol and cotton swab.

For hand soldering the maximum applicable temperature is 215 °C for a dwell time less than 10s.

Any temperature above 215 °C will lead to an irreversible damage of the thermopile sensor.

Avoid heat exposure to the top and the window of the detector. Reflow and wave soldering is not recommended.

7. Liability

Important product or process changes require a customer release. Changes or modifications at the product which haven't influence to the performance and/or quality of the device haven't to be announced to the customers in advance. Customers are requested to consult with Heimann Sensor representatives before the use of Heimann Sensor products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage. The company or their representatives will not be responsible for damage arising from such use without prior approval.