violumas
High Power UV LED Solutions

VioBeam
Ultra Narrow Beam
UVA/B/C LED

- **Chip on Board (COB)**
- **Heat Sinks and Drivers**

BostonElectronics

www.boselec.com
uv@boselec.com
shop.boselec.com
617.566.3821

violumas
High Power UV LED Solutions

Data Sheet

BostonElectronics

VioBeam-1X1-255-V2 | Ultra Narrow Beam 255nm UV LED

The VioBeam-1X1-255-V2 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 255±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 9.4mm
- Typical Peak Wavelength: 255nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F=500mA and T_A=25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	250	255	260
Forward Voltage	V_F	V	5.6	5.9	6.4
Radiant Flux	P_O	mW	40	60	80
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	13	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance:±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	700
Reverse Voltage	V_R	V	5
Power	P_D	W	4.8
Junction Temperature	T_J	°C	90
Operating Temperature	T_{OPR}	°C	-30 ~ 85
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

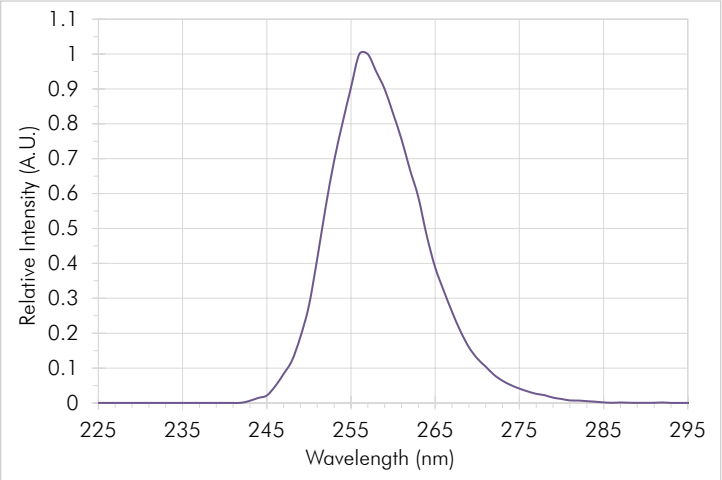


Radiation Pattern

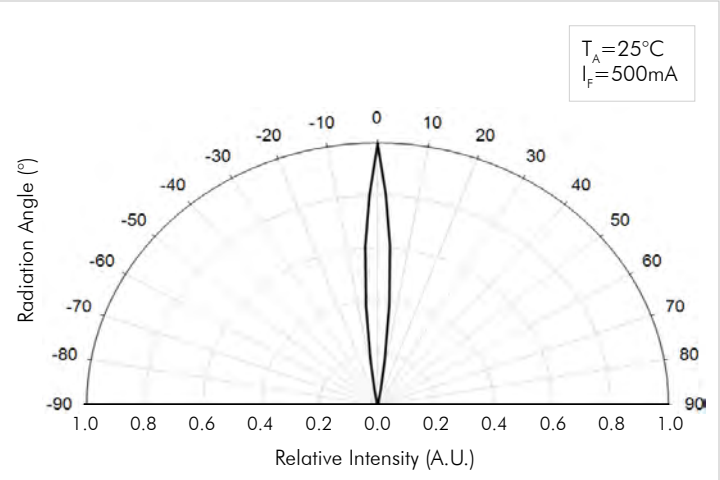


Forward Current vs. Relative Radiant Flux

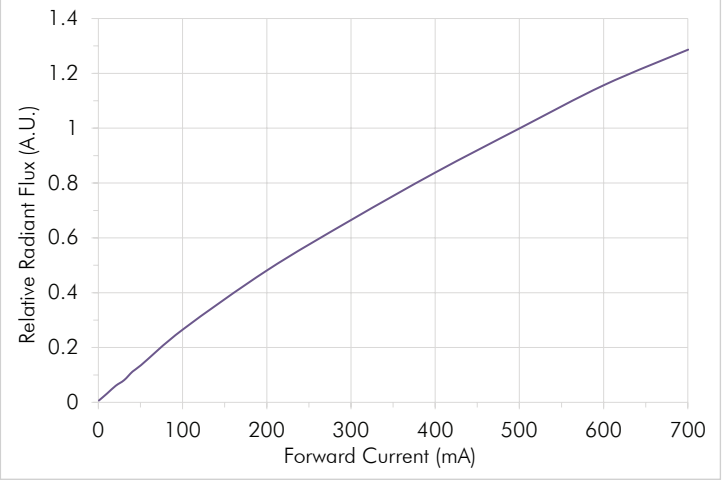


Forward Voltage vs. Forward Current

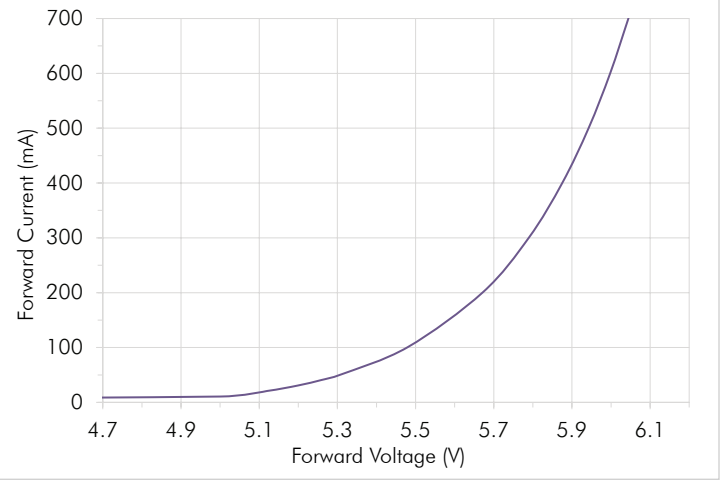



Mechanical Dimensions

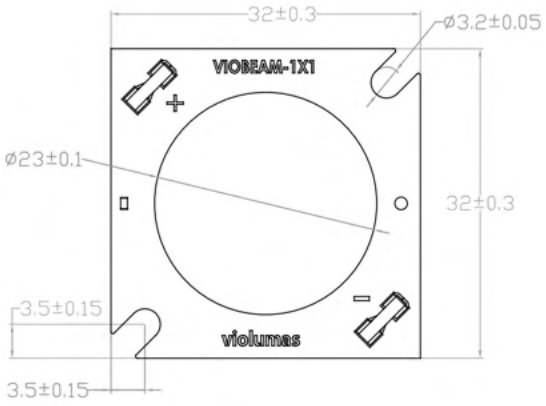

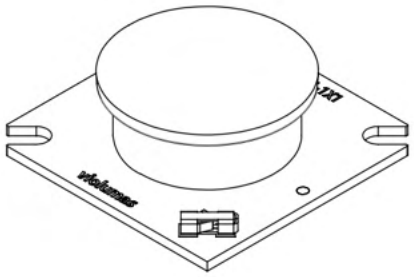

LED Circuit






Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

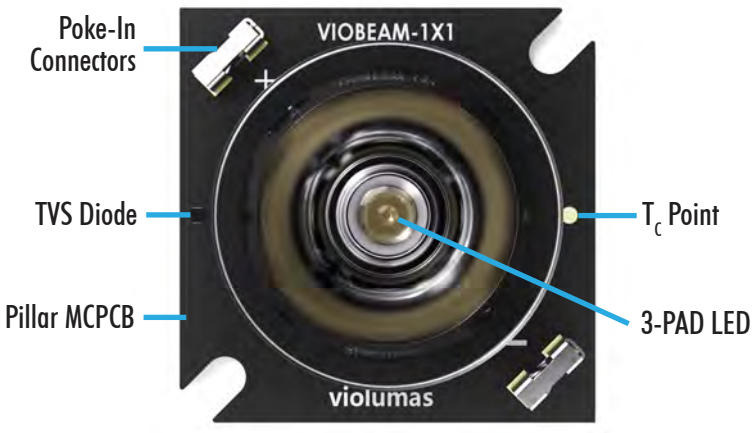

- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 500mA)


The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

Throw Distance: 10cm

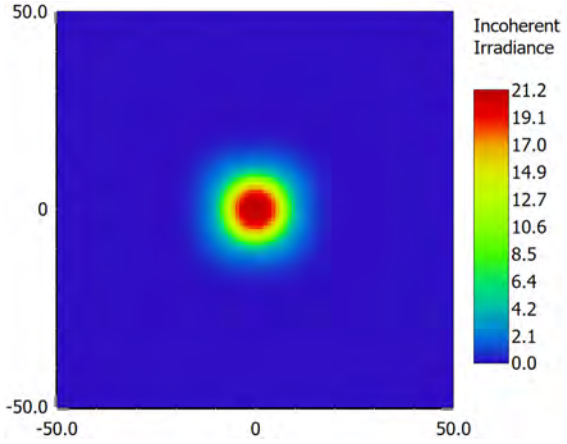

Peak Intensity: 21.2 mW/cm^2

Throw Distance: 10mm

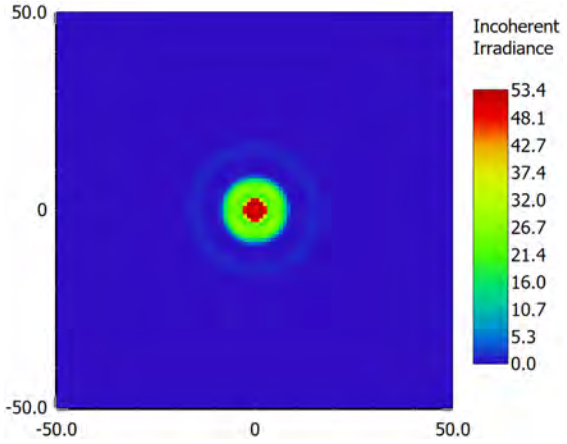

Peak Intensity: 53.4 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-255-V2 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-500A7W Driver Kit

Suitable for VioBeam-1X1-255-V2



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 01/09/2026: Release of official datasheet

violumas
High Power UV LED Solutions

Data Sheet

BostonElectronics

VioBeam-1X1-265-V2 | Ultra Narrow Beam 265nm UV LED

The VioBeam-1X1-265-V2 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 265±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 9.4mm
- Typical Peak Wavelength: 265nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F = 700mA and T_A = 25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	260	265	270
Forward Voltage	V_F	V	5.8	6.2	6.8
Radiant Flux	P_O	mW	90	115	145
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	13	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	90
Operating Temperature	T_{OPR}	°C	-30 ~ 85
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

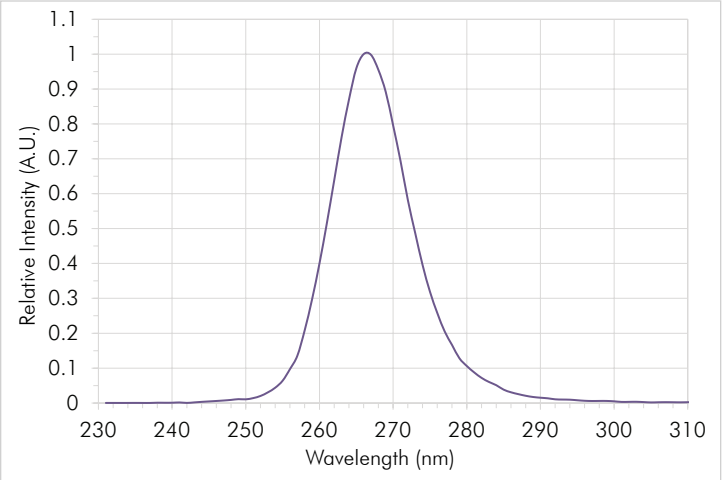


Radiation Pattern

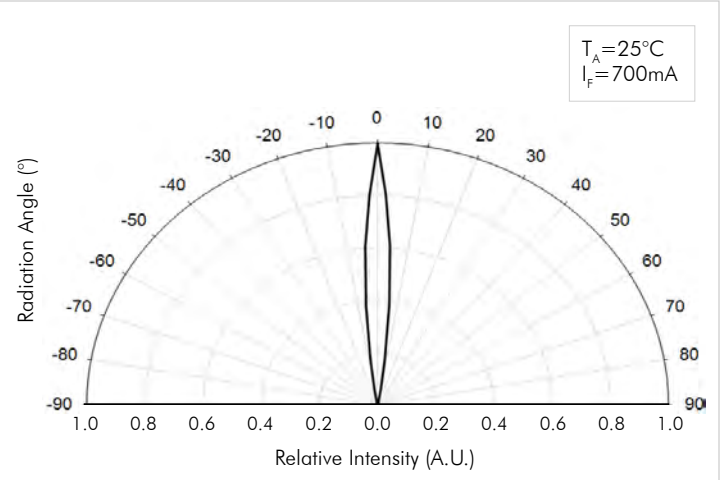


Forward Current vs. Relative Radiant Flux

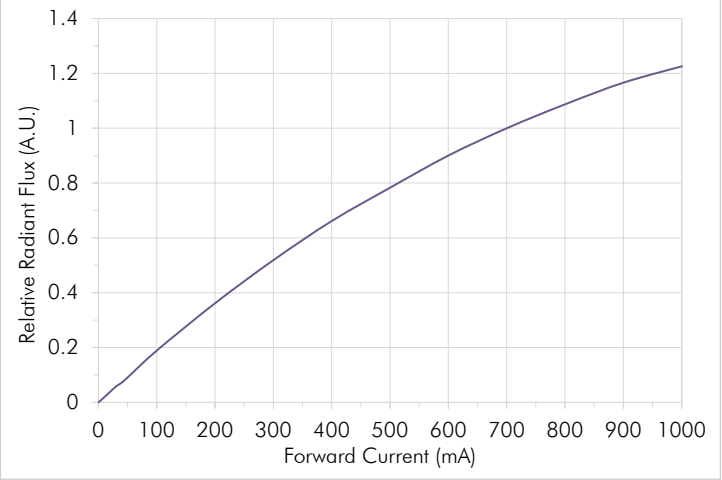


Forward Voltage vs. Forward Current

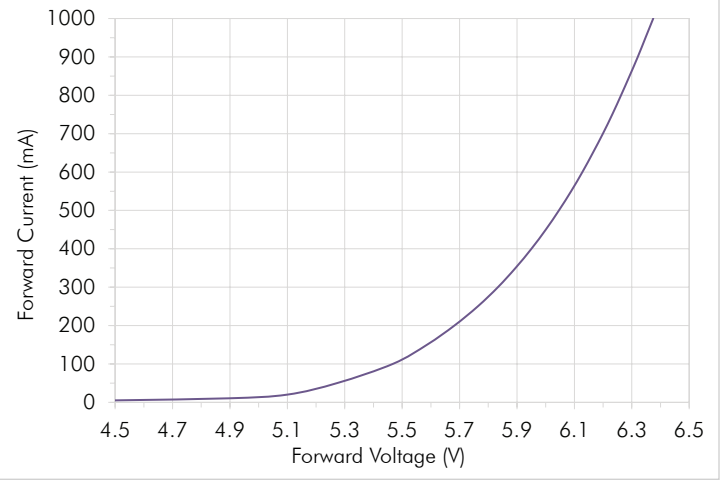



Mechanical Dimensions

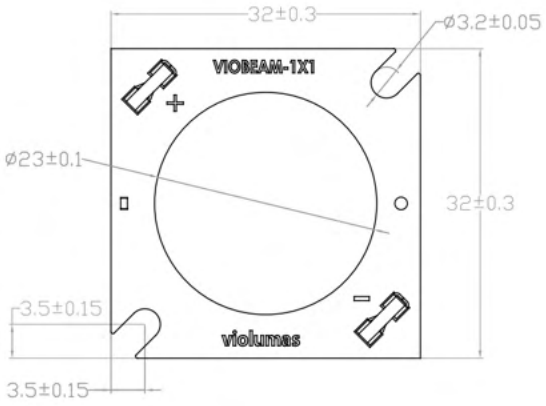

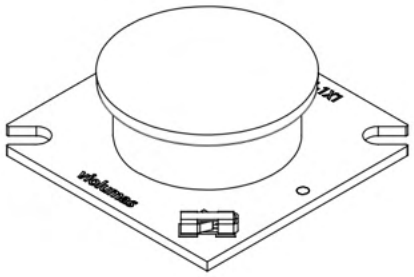

LED Circuit






Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

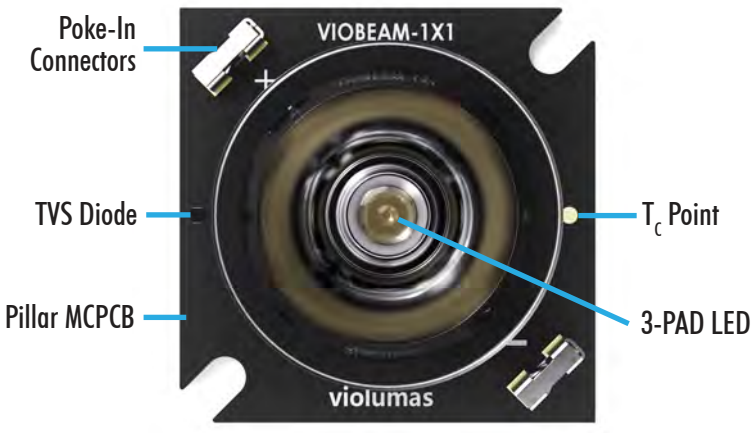

- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 700mA)


The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

Throw Distance: 10cm

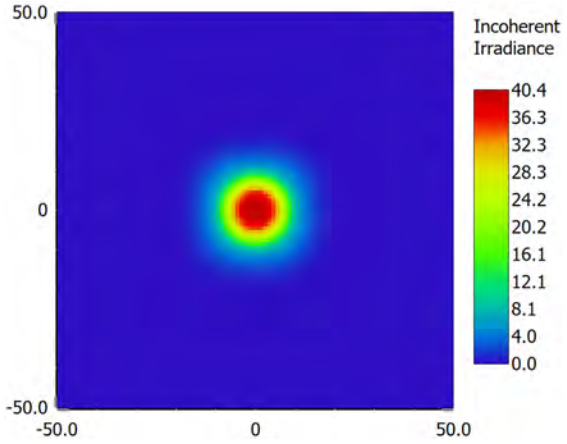

Peak Intensity: 40.4 mW/cm^2

Throw Distance: 10mm

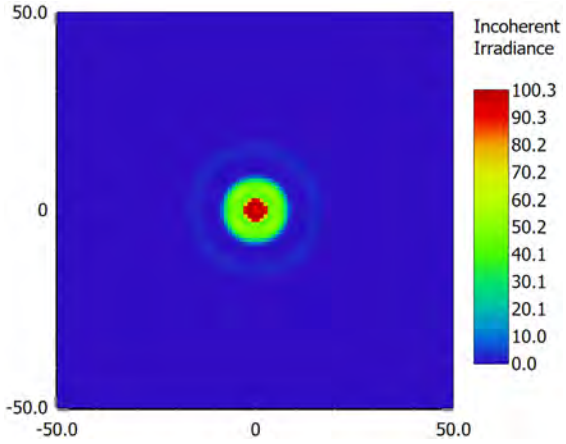

Peak Intensity: 100.3 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-265-V2 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A6W Driver Kit

Suitable for VioBeam-1X1-265-V2



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 01/09/2026: Release of official datasheet

VioBeam-1X1-275-V2 | Ultra Narrow Beam 275nm UV LED

The VioBeam-1X1-275-V2 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 275±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 9.4mm
- Typical Peak Wavelength: 275nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F = 700mA and T_A = 25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	270	275	280
Forward Voltage	V_F	V	5.8	6.2	6.8
Radiant Flux	P_O	mW	100	130	150
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	13	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	90
Operating Temperature	T_{OPR}	°C	-30 ~ 85
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

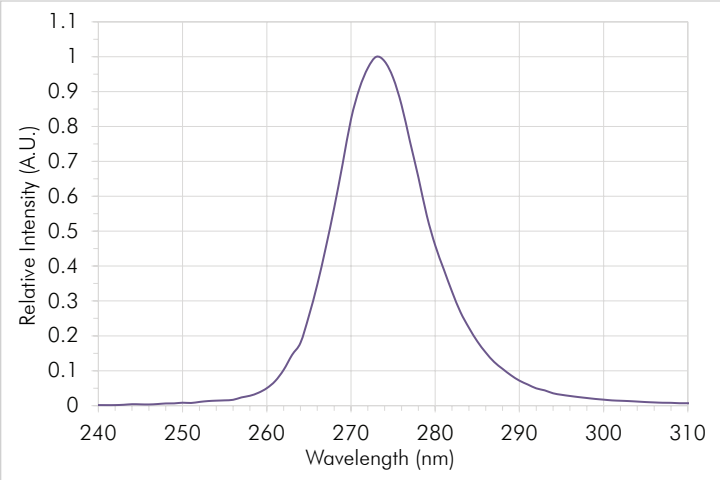


Radiation Pattern

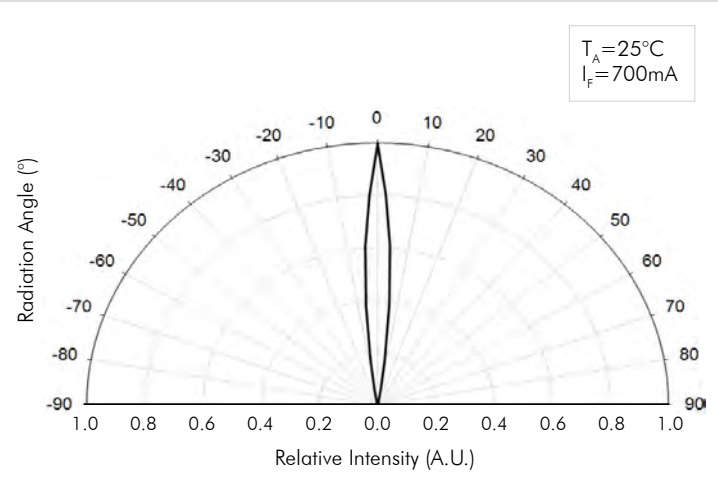


Forward Current vs. Relative Radiant Flux

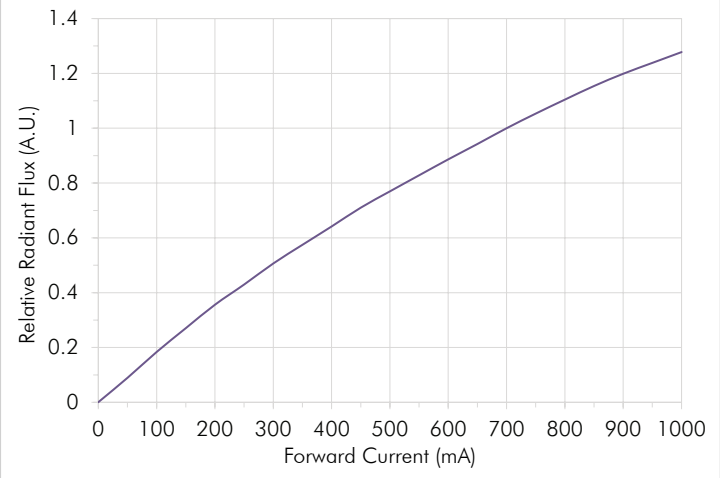


Forward Voltage vs. Forward Current

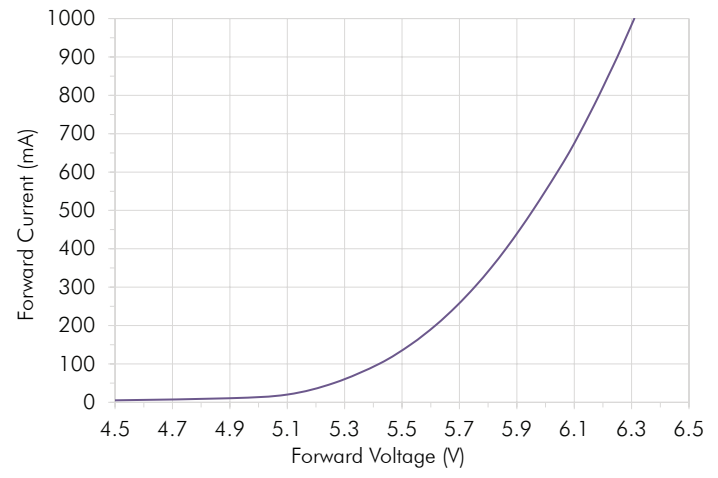



Mechanical Dimensions

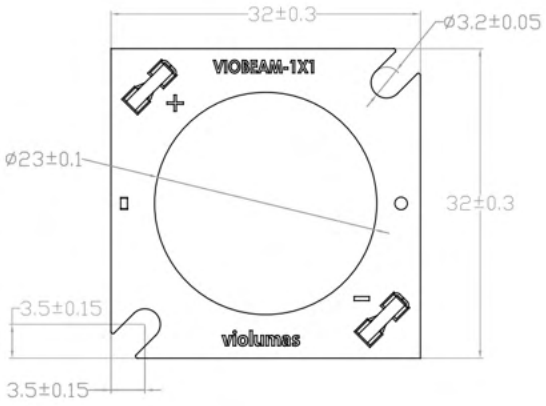

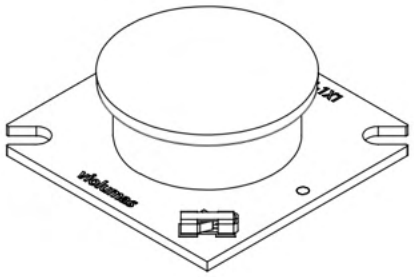

LED Circuit







Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

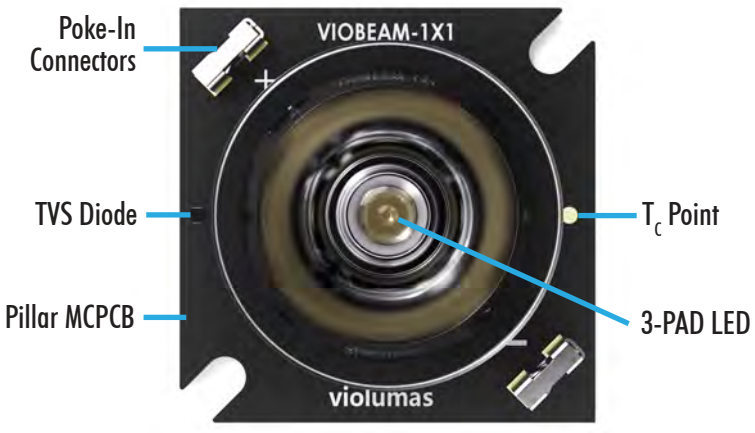


- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge

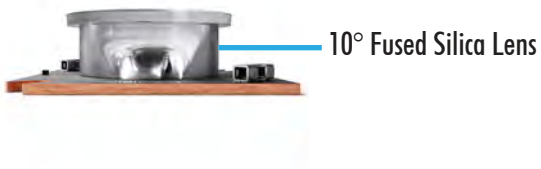


Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 700mA)

The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

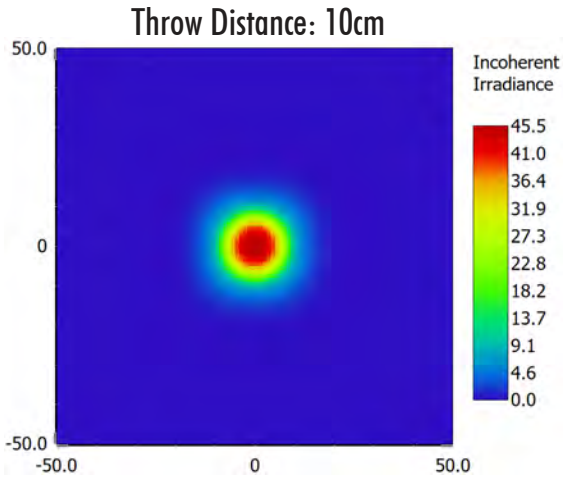

Peak Intensity: 45.5 mW/cm^2

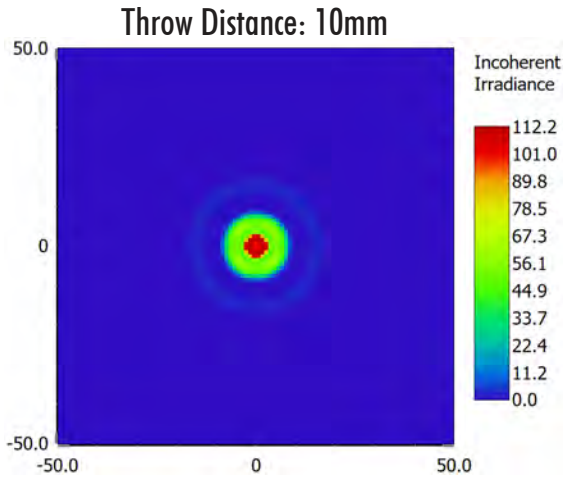

Peak Intensity: 112.2 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-275-V2 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A6W Driver Kit

Suitable for VioBeam-1X1-275-V2



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 01/09/2026: Release of official datasheet

VioBeam-1X1-295 | Ultra Narrow Beam 295nm UV LED

The VioBeam-1X1-295 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 295±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 9.4mm
- Typical Peak Wavelength: 295nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F=700mA and T_A=25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	290	295	300
Forward Voltage	V_F	V	5.1	5.8	6.2
Radiant Flux	P_O	mW	70	80	100
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	12.3	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	90
Operating Temperature	T_{OPR}	°C	-30 ~ 85
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

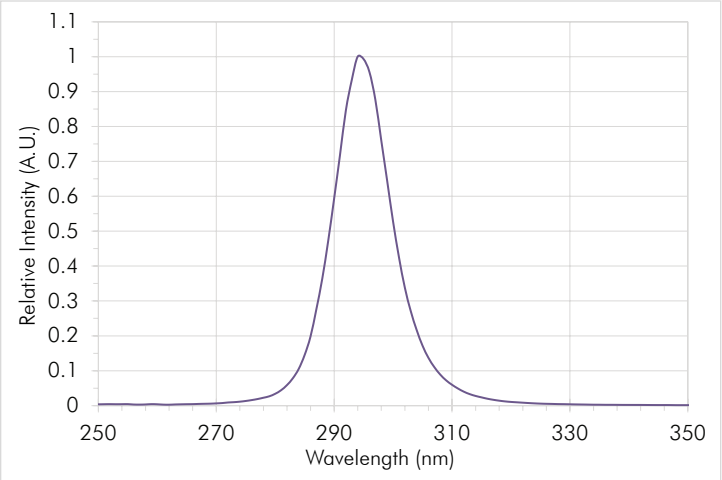


Radiation Pattern

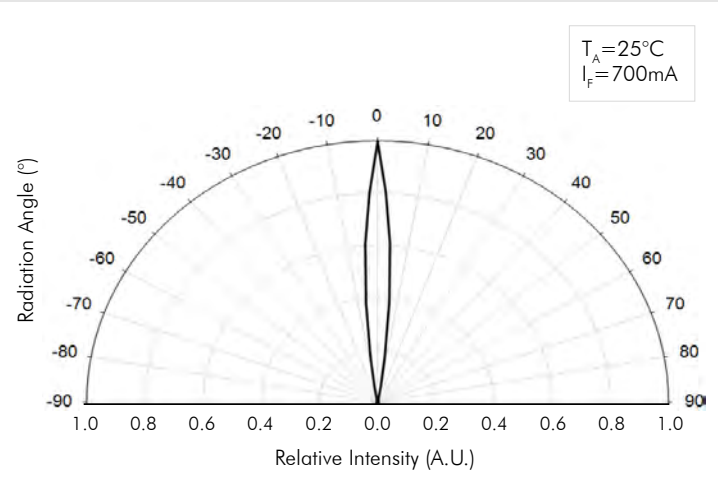


Forward Current vs. Relative Radiant Flux

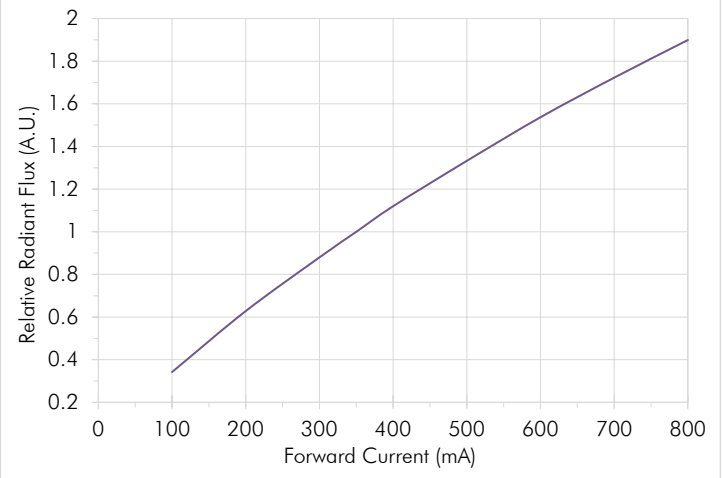


Forward Voltage vs. Forward Current

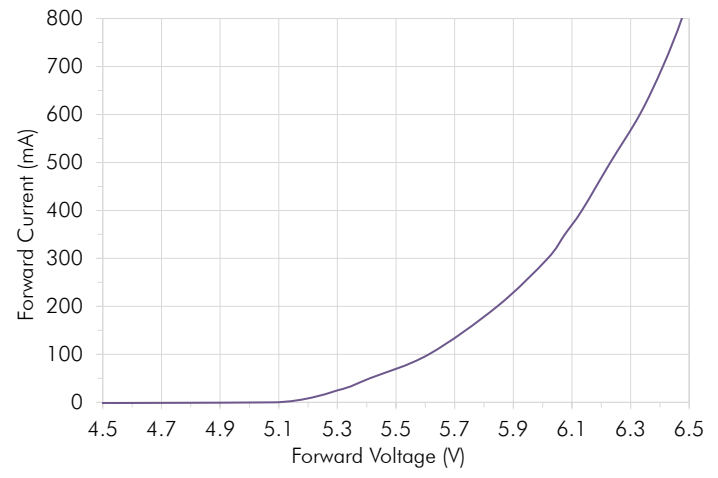



Mechanical Dimensions

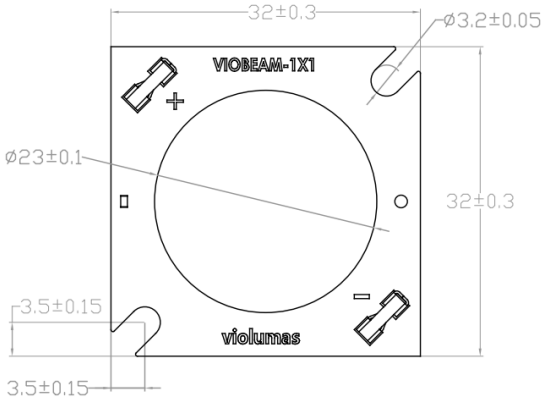

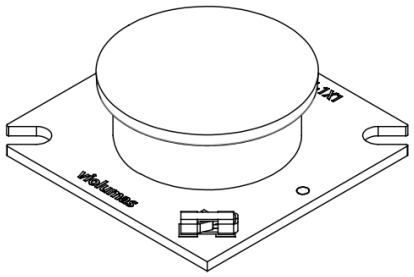

LED Circuit






Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

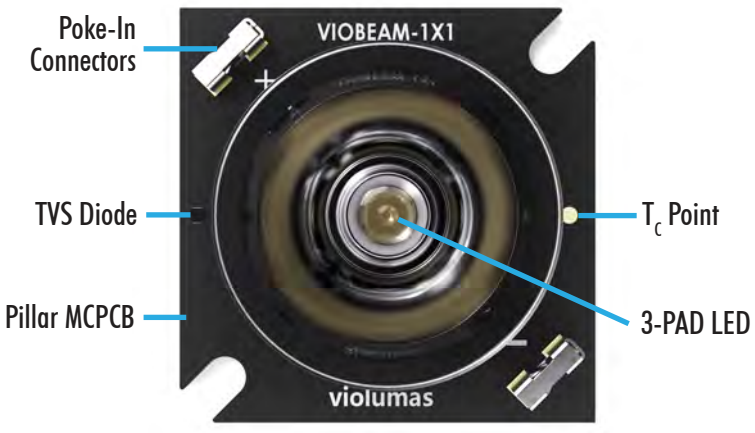

- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 700mA)


The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

Throw Distance: 10cm

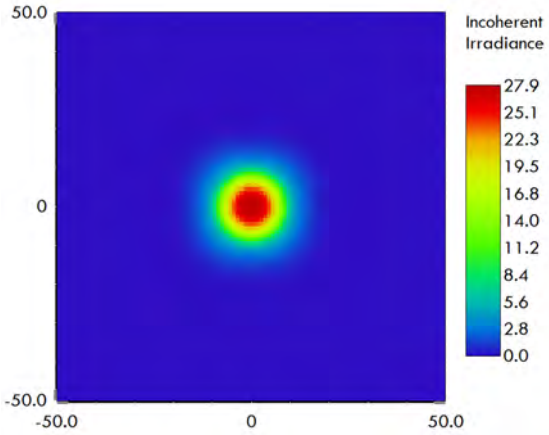

Peak Intensity: 27.9 mW/cm^2

Throw Distance: 10mm

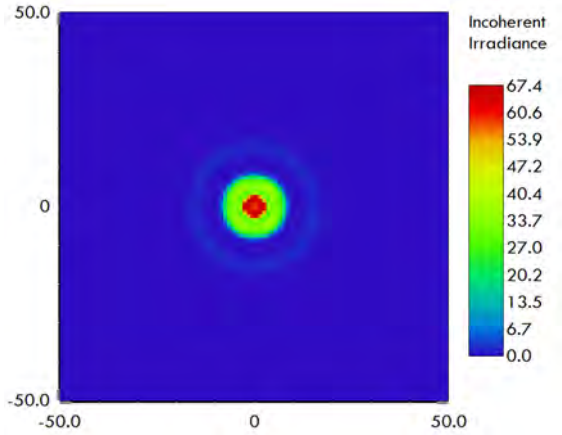

Peak Intensity: 67.4 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-295 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A6W Driver Kit

Suitable for VioBeam-1X1-295



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

VioBeam-1X1-310-V2 | Ultra Narrow Beam 310nm UV LED

The VioBeam-1X1-310-V2 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 308±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 9.4mm
- Typical Peak Wavelength: 308nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F=700mA and T_A=25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	303	308	313
Forward Voltage	V_F	V	5.5	6.0	7.0
Radiant Flux	P_O	mW	80	100	120
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	15	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance:±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	90
Operating Temperature	T_{OPR}	°C	-30 ~ 85
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

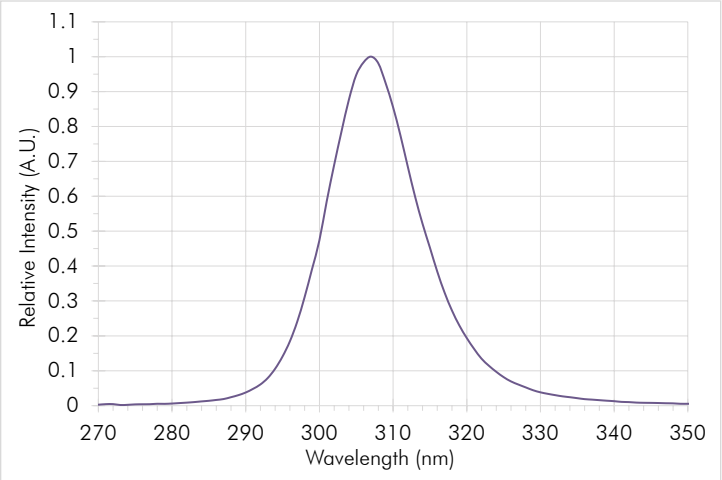


Radiation Pattern

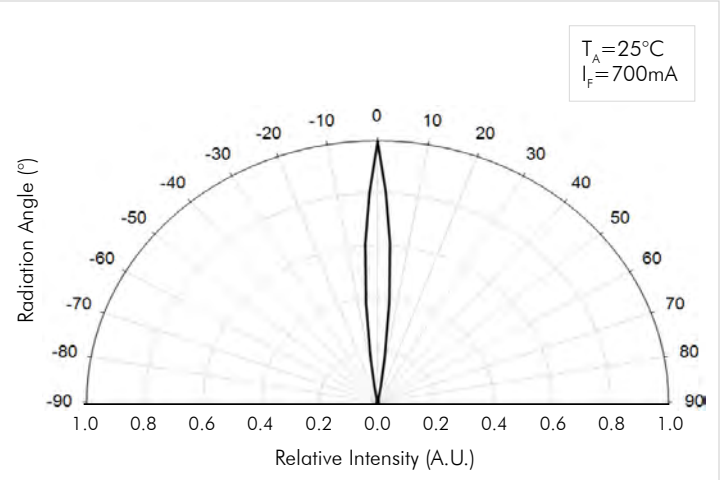


Forward Current vs. Relative Radiant Flux

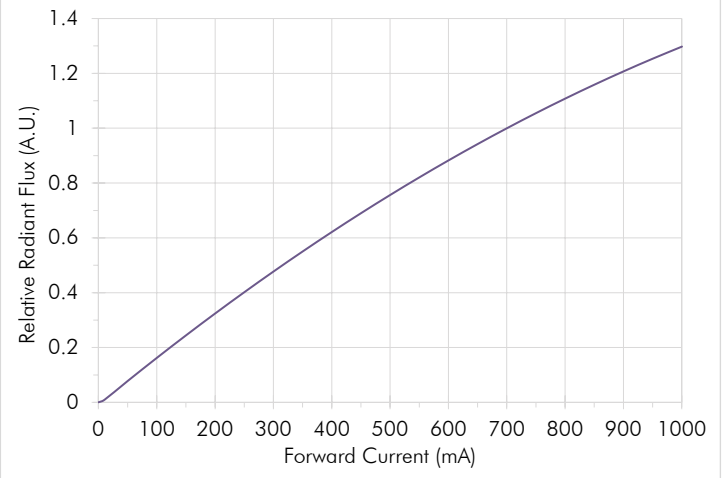


Forward Voltage vs. Forward Current

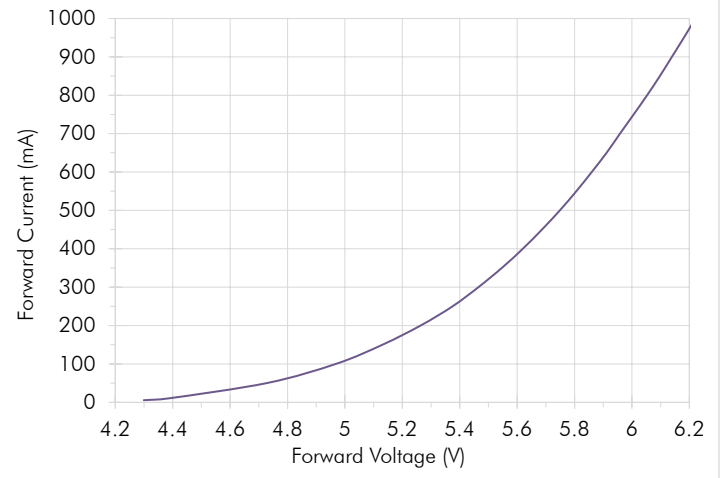



Mechanical Dimensions

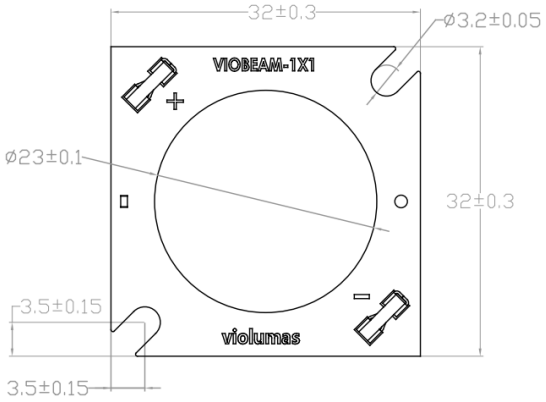

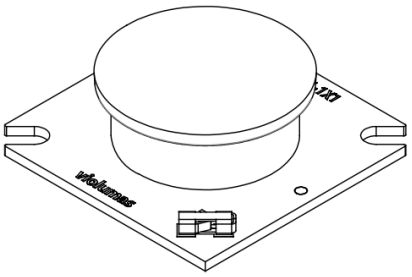

LED Circuit






Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

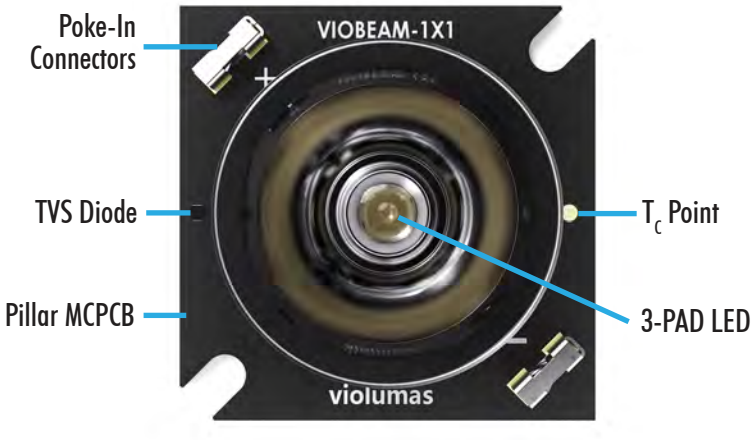

- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 700mA)


The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

Throw Distance: 10cm

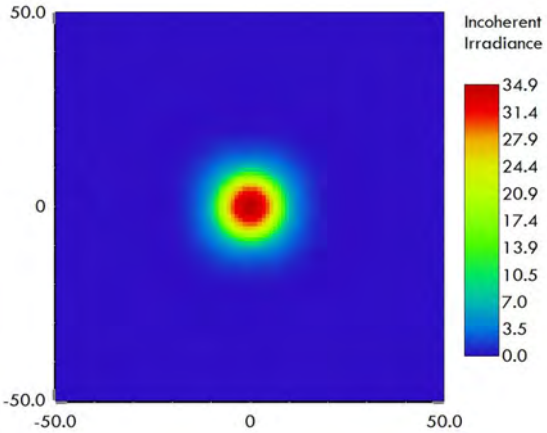

Peak Intensity: 34.9 mW/cm^2

Throw Distance: 10mm

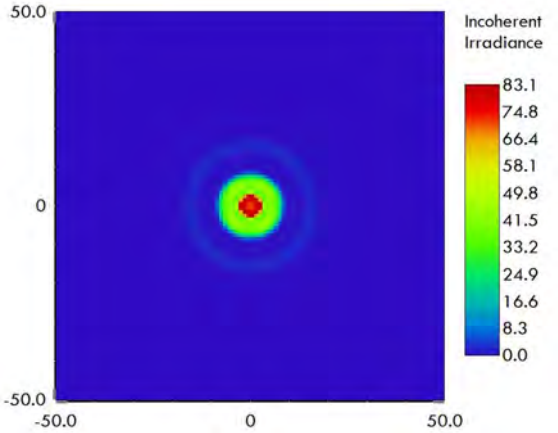

Peak Intensity: 83.1 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-310-V2 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A6W Driver Kit

Suitable for VioBeam-1X1-310-V2



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 09/21/2026: Release of official datasheet

VioBeam-1X1-325-V1 | Ultra Narrow Beam 325nm UV LED

The VioBeam-1X1-325-V1 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 325±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 9.8mm
- Typical Peak Wavelength: 325nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:
  - Disinfection
  - Air Purification
  - Spectroscopy
  - Fluorescence
  - Life Sciences
  - Curing
  - Sensing
  - Research

Electro-Optical Characteristics at I_F = 350mA and T_A = 25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	320	325	330
Forward Voltage	V_F	V	4.2	4.8	5.5
Radiant Flux	P_O	mW	50	70	90
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	12	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	600
Reverse Voltage	V_R	V	5
Power	P_D	W	4
Junction Temperature	T_J	°C	90
Operating Temperature	T_{OPR}	°C	-30 ~ 85
Storage Temperature	T_{STG}	°C	-40 ~ 85

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

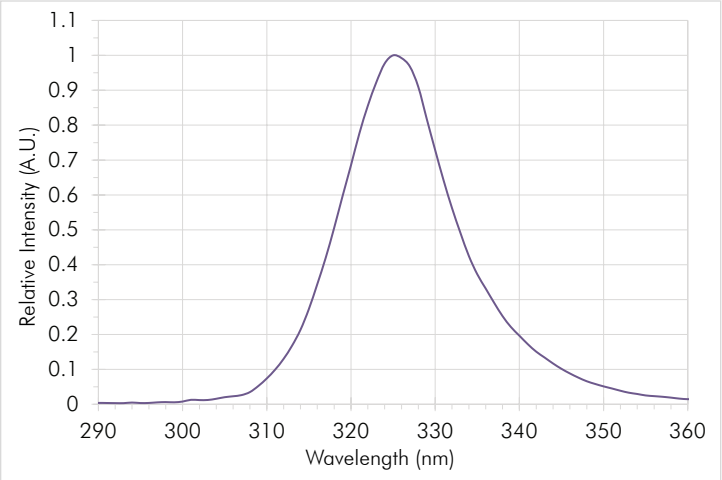


Radiation Pattern

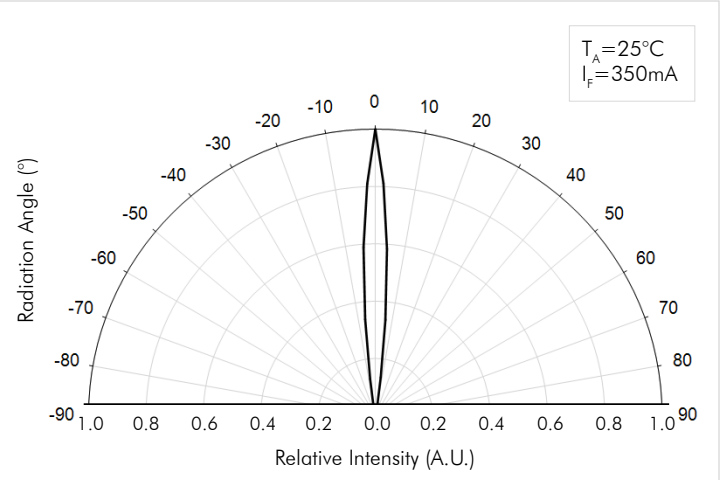


Forward Current vs. Relative Radiant Flux

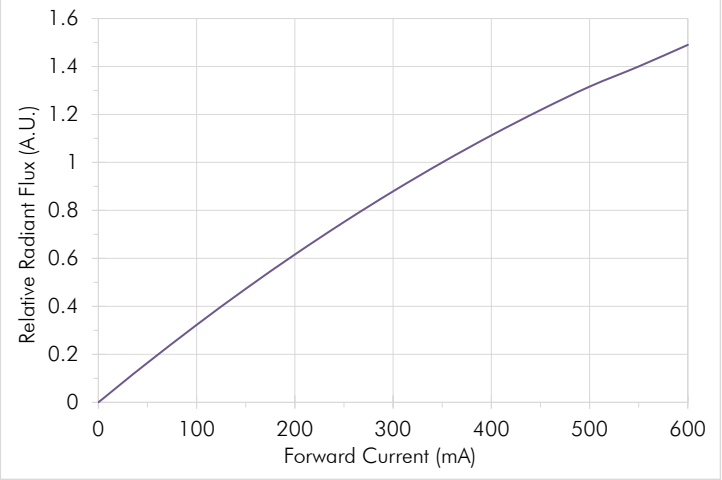


Forward Voltage vs. Forward Current

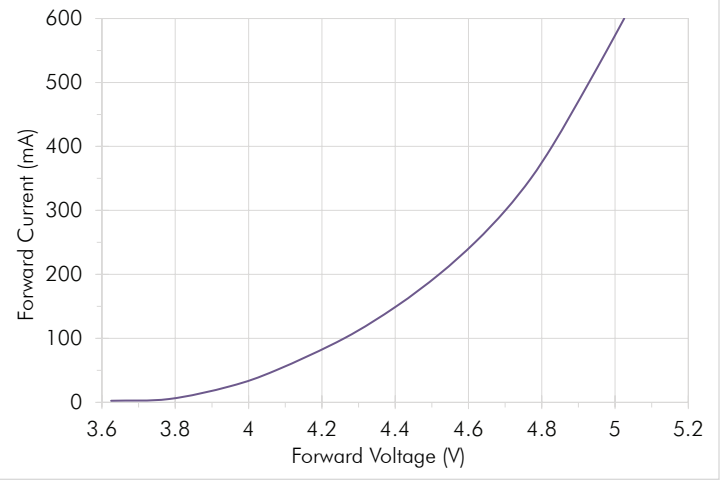



Mechanical Dimensions

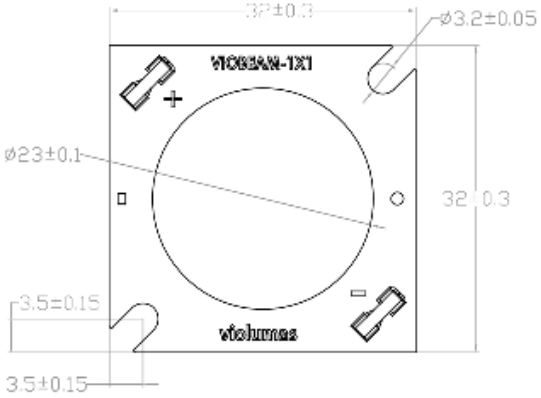


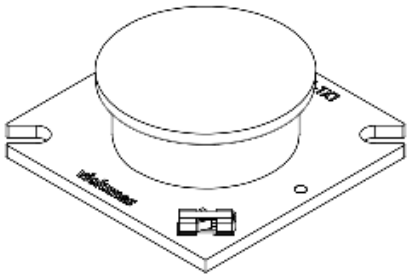

LED Circuit






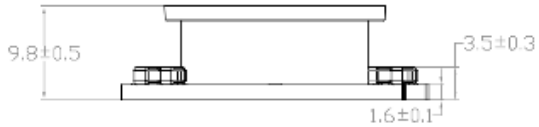

Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

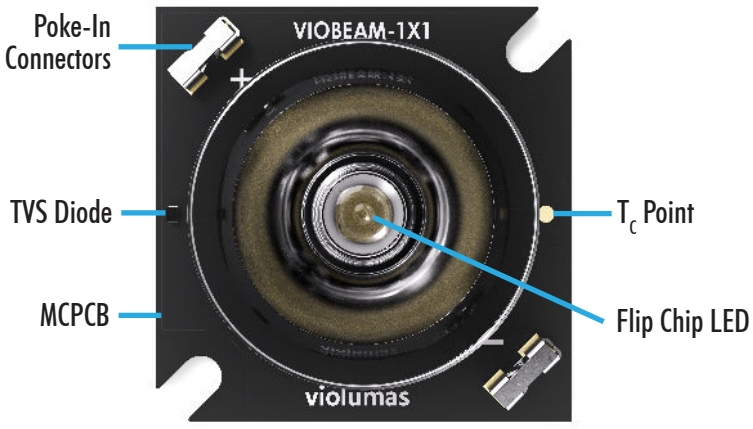


- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 350mA)

The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

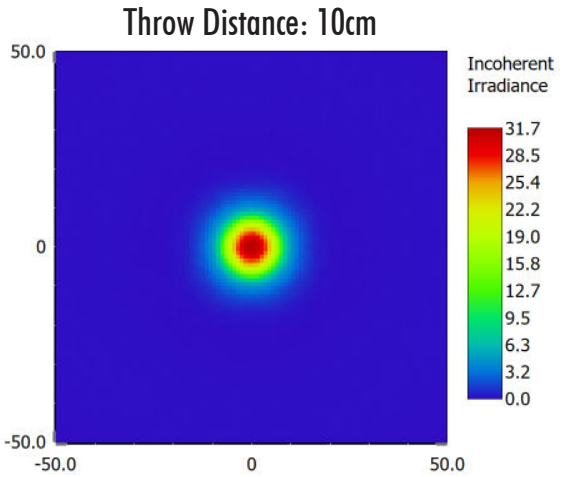

Peak Intensity: 31.7 mW/cm^2

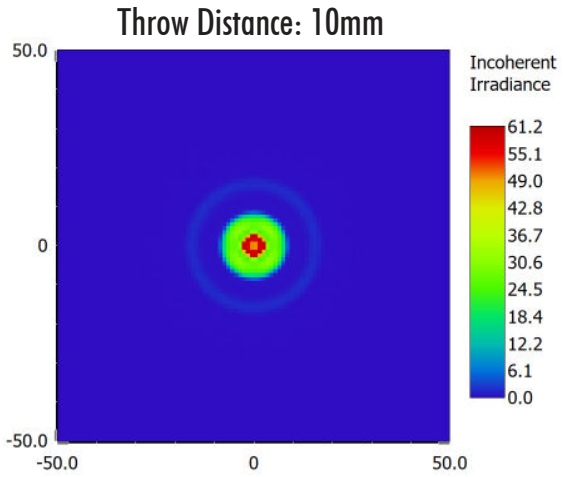

Peak Intensity: 61.2 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-325-V1 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-350A3W Driver Kit

Suitable for VioBeam-1X1-325-V1



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas.

Revision History

- 10/20/2025: Release of initial version

VioBeam-1X1-340-V2 | Ultra Narrow Beam 340nm UV LED

The VioBeam-1X1-340-V2 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 340±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 10.5mm
- Typical Peak Wavelength: 340nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:
  - Disinfection
  - Air Purification
  - Spectroscopy
  - Fluorescence
  - Life Sciences
  - Curing
  - Sensing
  - Research

Electro-Optical Characteristics at I_F = 350mA and T_A = 25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	335	340	345
Forward Voltage	V_F	V	4.0	4.8	5.5
Radiant Flux	P_O	mW	110	155	220
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	12	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	600
Reverse Voltage	V_R	V	5
Power	P_D	W	4
Junction Temperature	T_J	°C	90
Operating Temperature	T_{OPR}	°C	-30 ~ 85
Storage Temperature	T_{STG}	°C	-40 ~ 85

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

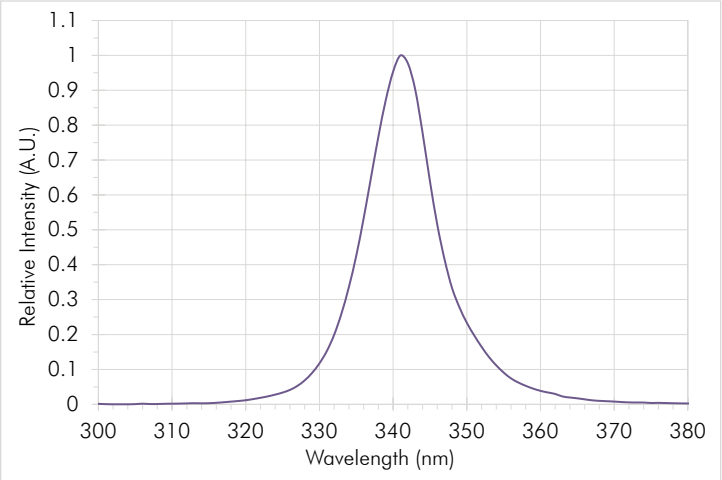


Radiation Pattern

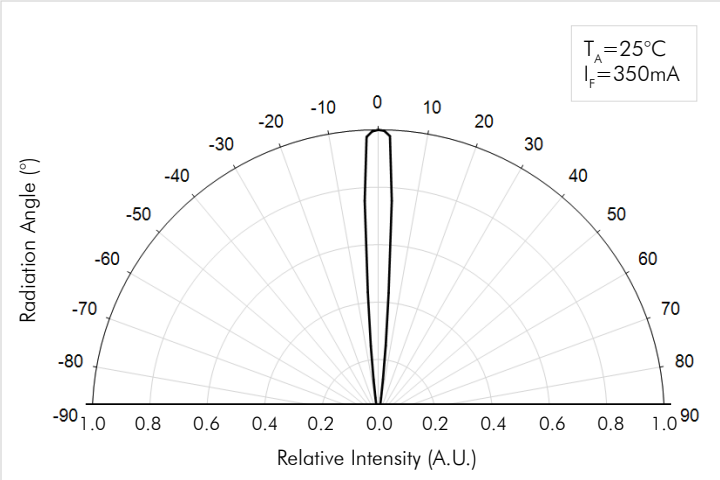


Forward Current vs. Relative Radiant Flux

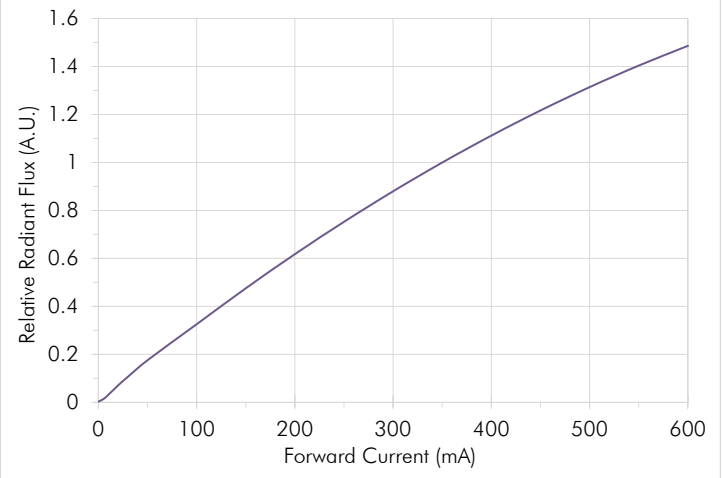


Forward Voltage vs. Forward Current

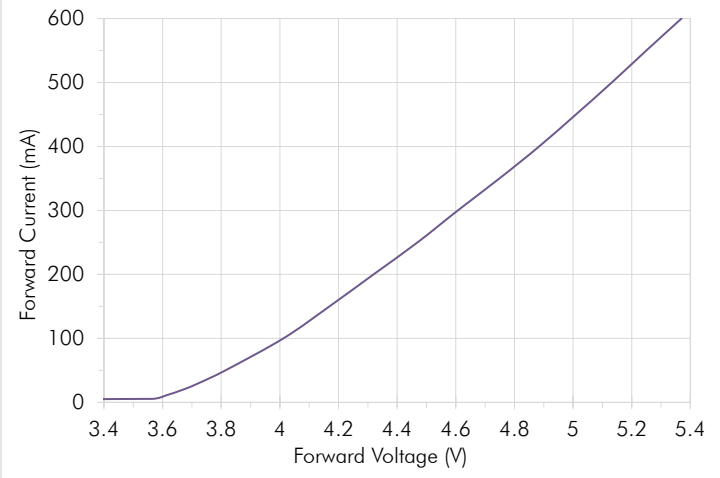



Mechanical Dimensions

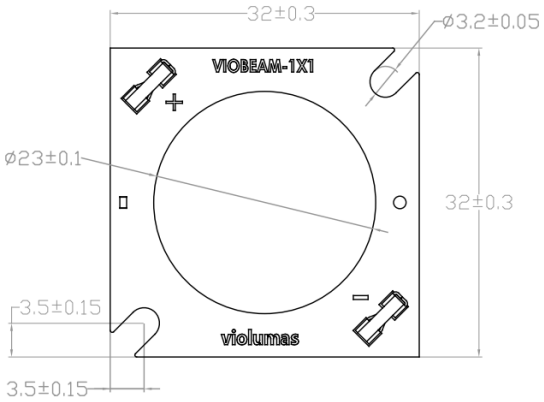

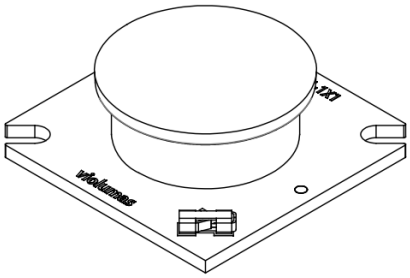

LED Circuit




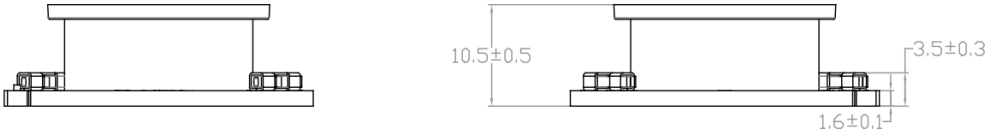

Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

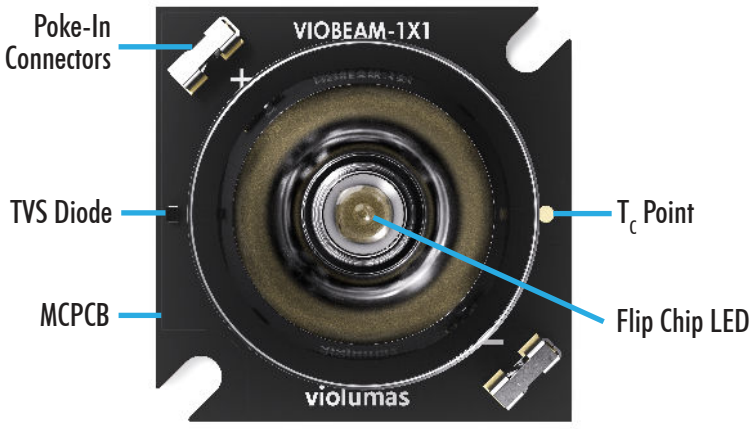


- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 350mA)

The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

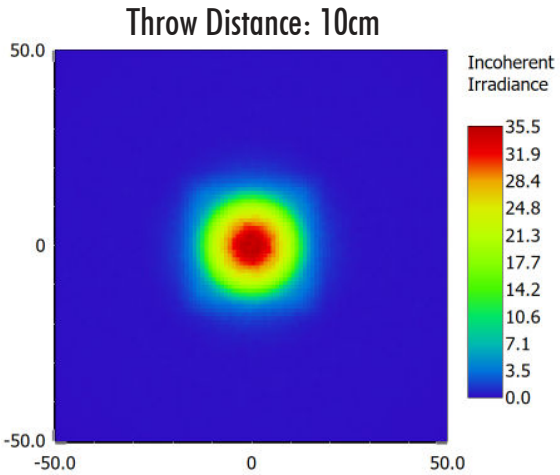

Peak Intensity: 35.5 mW/cm^2

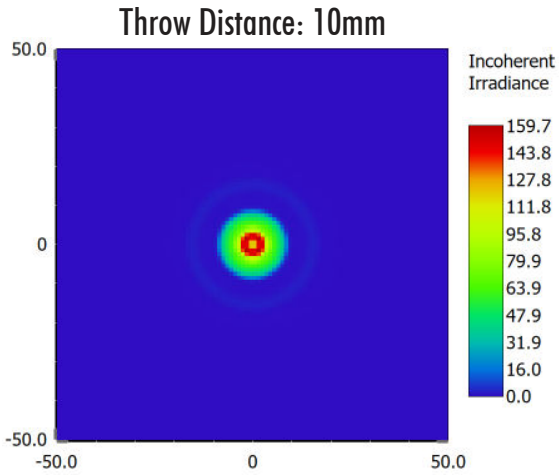

Peak Intensity: 159.7 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-340-V2 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-350A3W Driver Kit

Suitable for VioBeam-1X1-340-V2



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas.

Revision History

- 10/20/2025: Release of initial version

VioBeam-1X1-365 | Ultra Narrow Beam 365nm UV LED

The VioBeam-1X1-365 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 365±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 10.1mm
- Typical Peak Wavelength: 365nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F=700mA and T_A=25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	360	365	370
Forward Voltage	V_F	V	3.6	4.0	4.5
Radiant Flux	P_O	mW	570	620	670
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	12	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance:±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	115
Operating Temperature	T_{OPR}	°C	-30 ~ 80
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

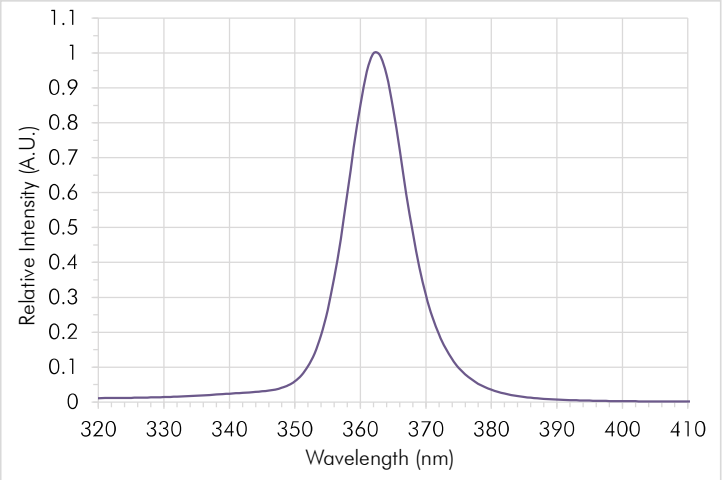


Radiation Pattern

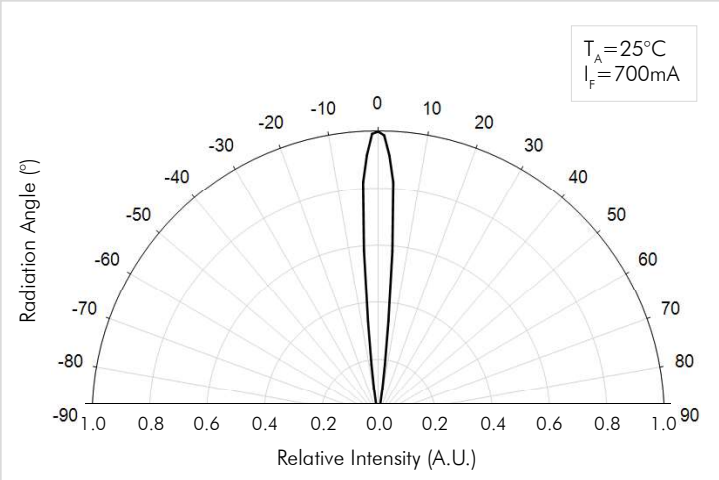


Forward Current vs. Relative Radiant Flux

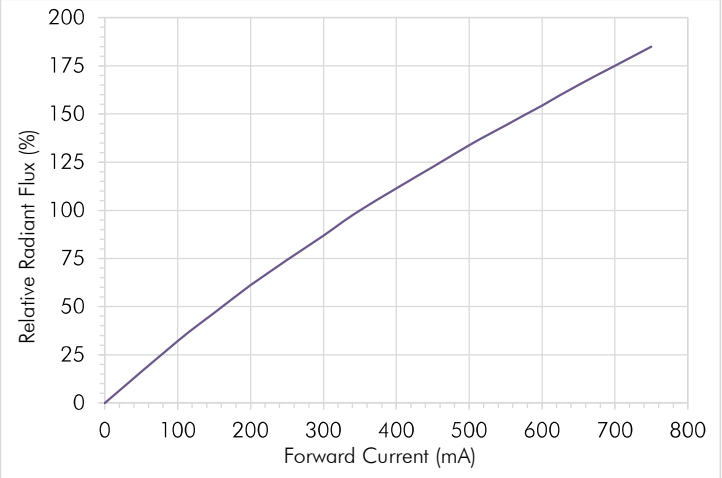


Forward Voltage vs. Forward Current

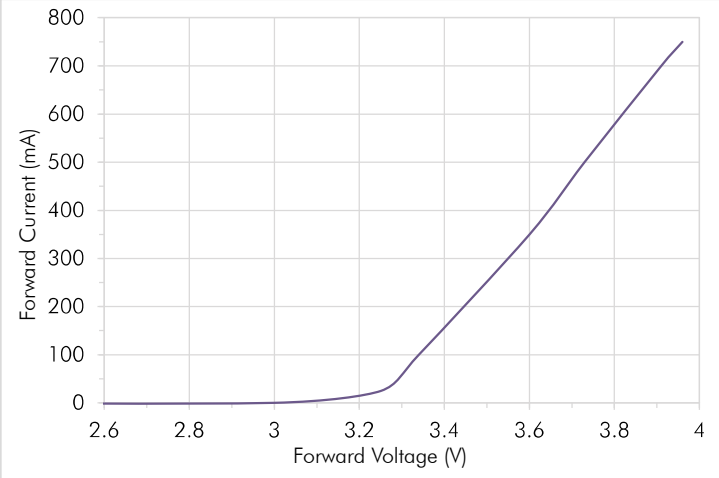



Mechanical Dimensions

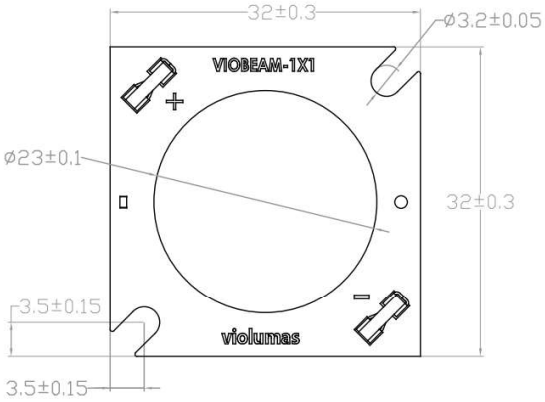

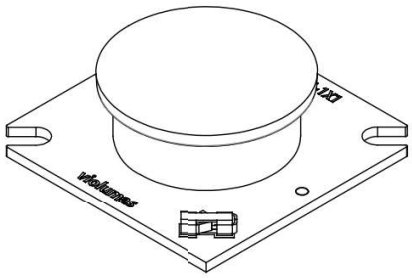

LED Circuit




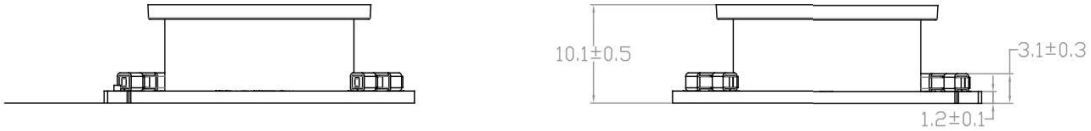

Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

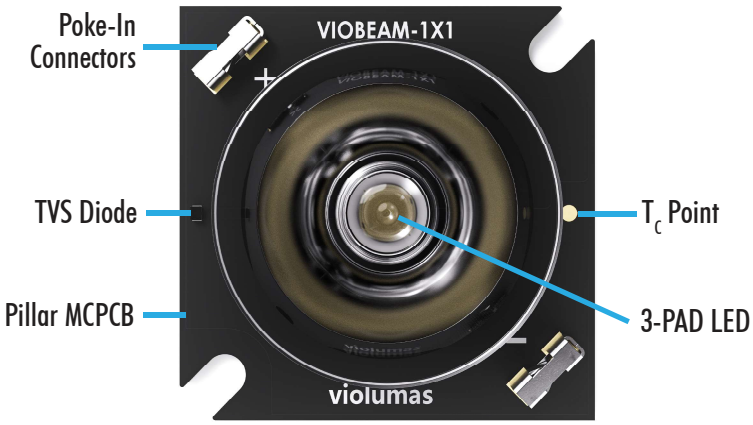


- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A=25°C and I_F=700mA)

The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

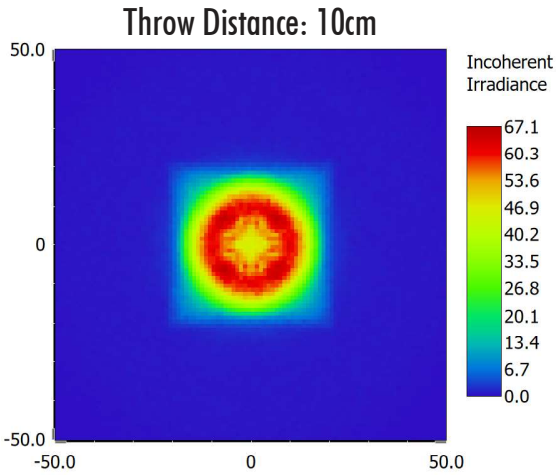

Peak Intensity: 67.1 mW/cm^2

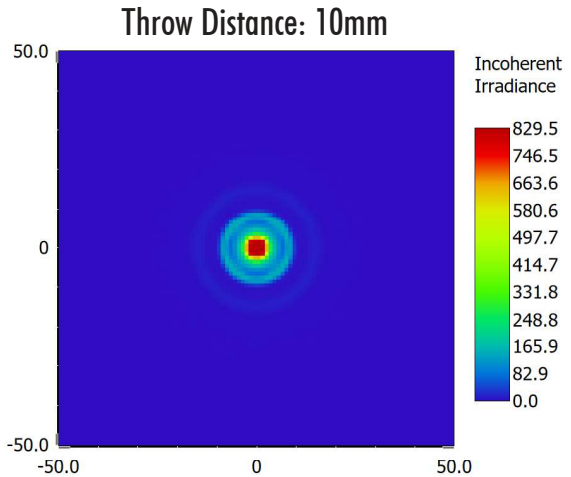

Peak Intensity: 829.5 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-365 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A3W Driver Kit

Suitable for VioBeam-1X1-365



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 10/20/2025: Release of initial version

VioBeam-1X1-375 | Ultra Narrow Beam 375nm UV LED

The VioBeam-1X1-375 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 375±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 10.1mm
- Typical Peak Wavelength: 375nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F=700mA and T_A=25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	370	375	380
Forward Voltage	V_F	V	3.6	3.9	4.4
Radiant Flux	P_O	mW	700	750	800
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	12	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	115
Operating Temperature	T_{OPR}	°C	-30 ~ 80
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

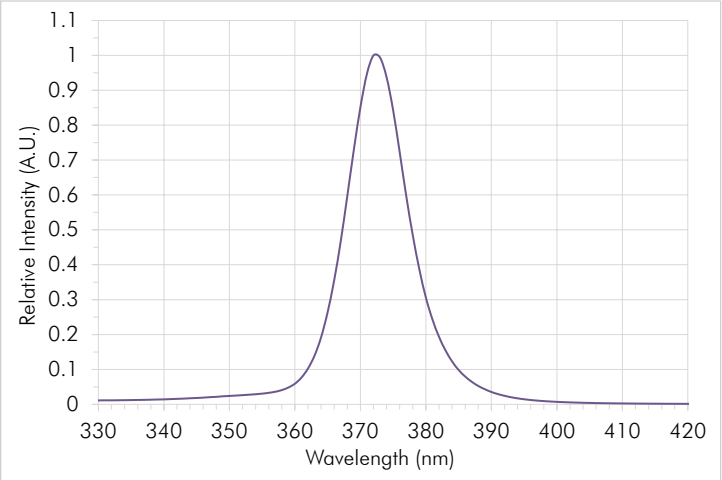


Radiation Pattern

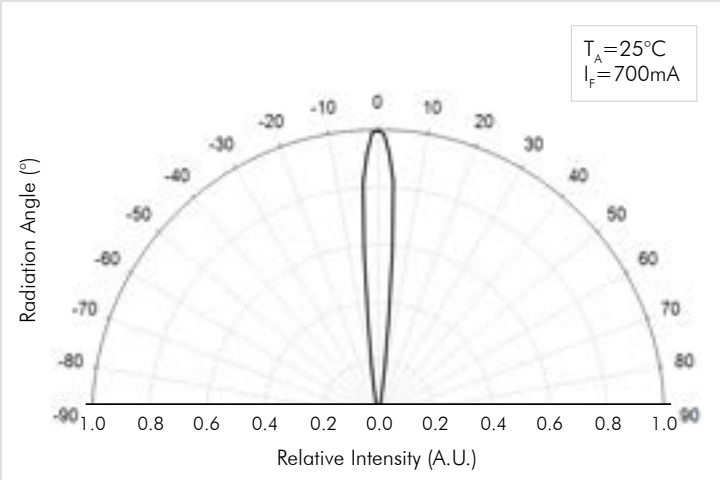


Forward Current vs. Relative Radiant Flux

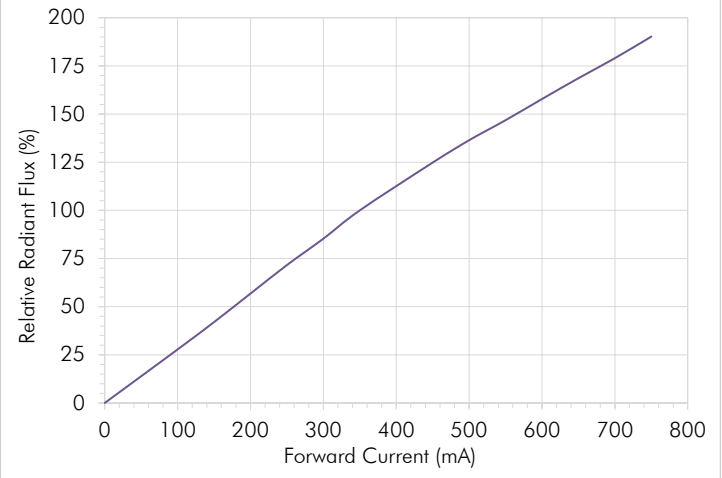


Forward Voltage vs. Forward Current

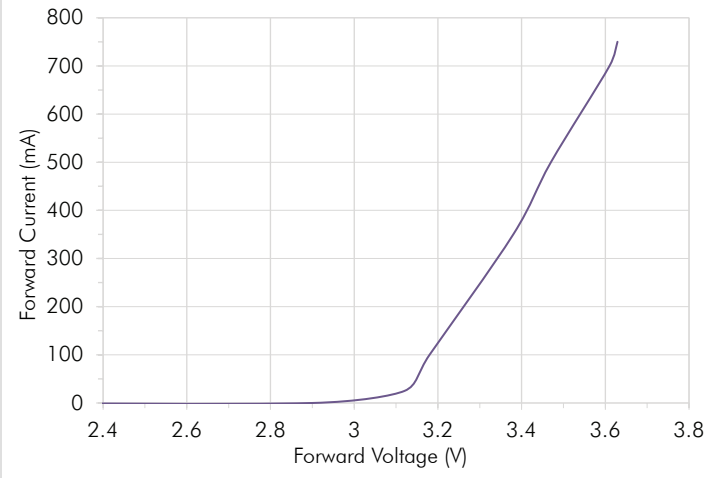



Mechanical Dimensions

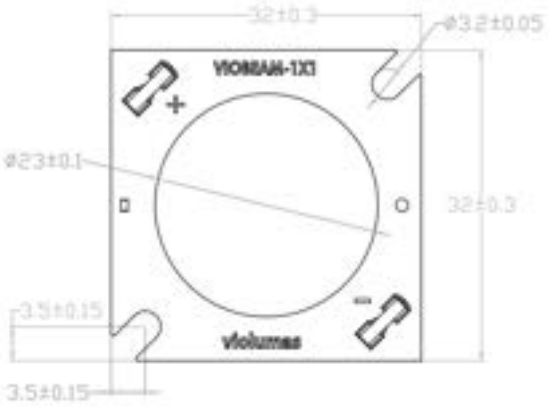

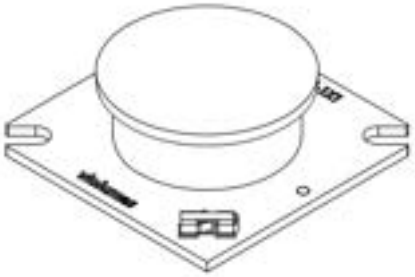

LED Circuit








Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

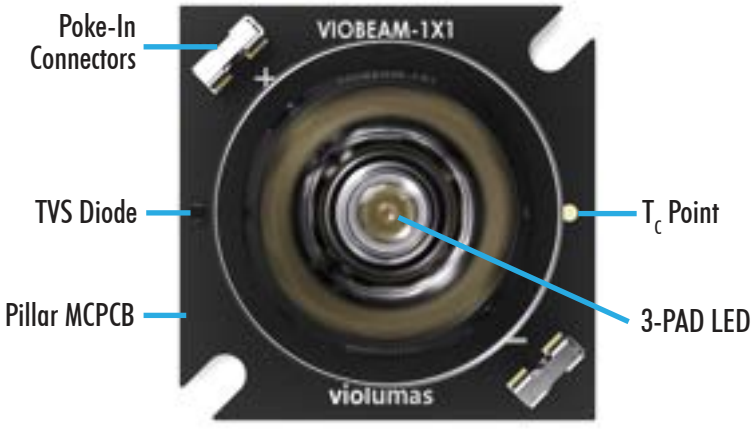

- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 700mA)


The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

Throw Distance: 10cm

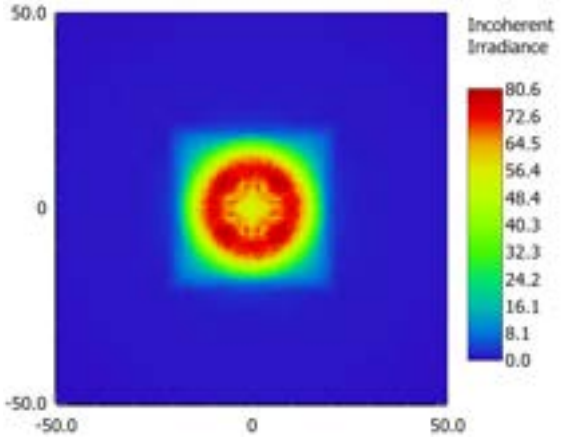

Peak Intensity: 80.6 mW/cm^2

Throw Distance: 10mm

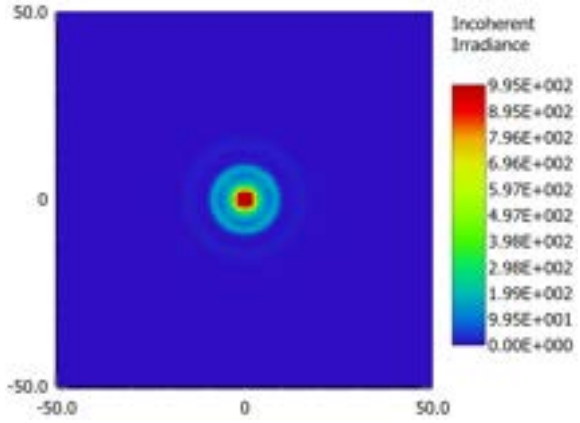

Peak Intensity: 995 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-375 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A3W Driver Kit

Suitable for VioBeam-1X1-375



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 10/20/2025: Release of initial version

VioBeam-1X1-385 | Ultra Narrow Beam 385nm UV LED

The VioBeam-1X1-385 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 385±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 10.1mm
- Typical Peak Wavelength: 385nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F=700mA and T_A=25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	380	385	390
Forward Voltage	V_F	V	3.6	3.8	4.3
Radiant Flux	P_O	mW	950	1000	1200
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	12	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	115
Operating Temperature	T_{OPR}	°C	-30 ~ 80
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

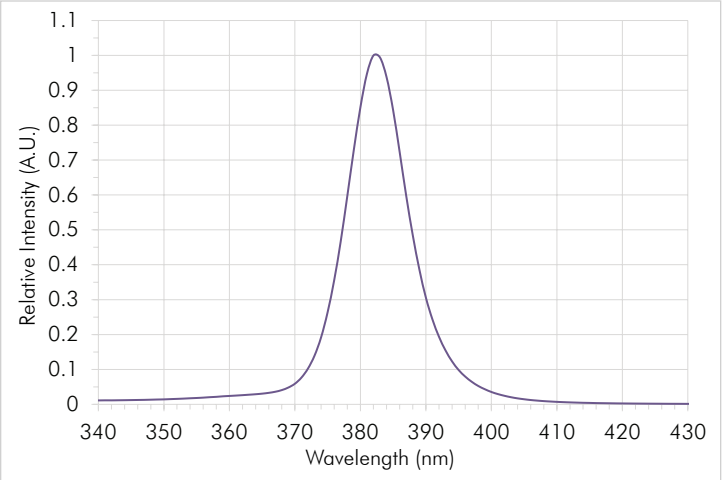


Radiation Pattern

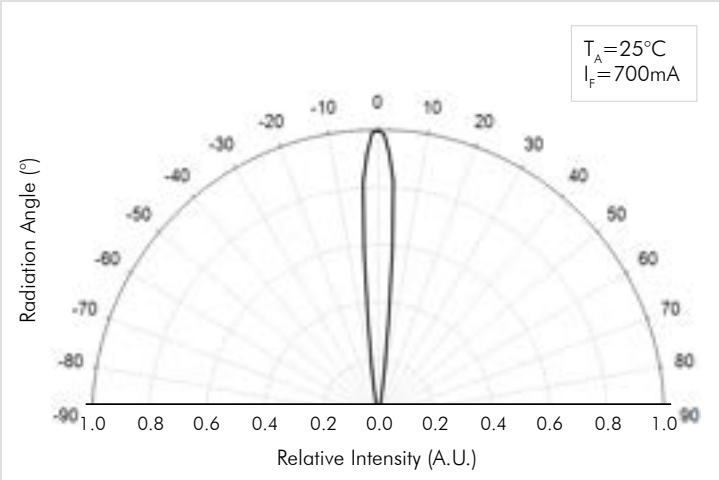


Forward Current vs. Relative Radiant Flux

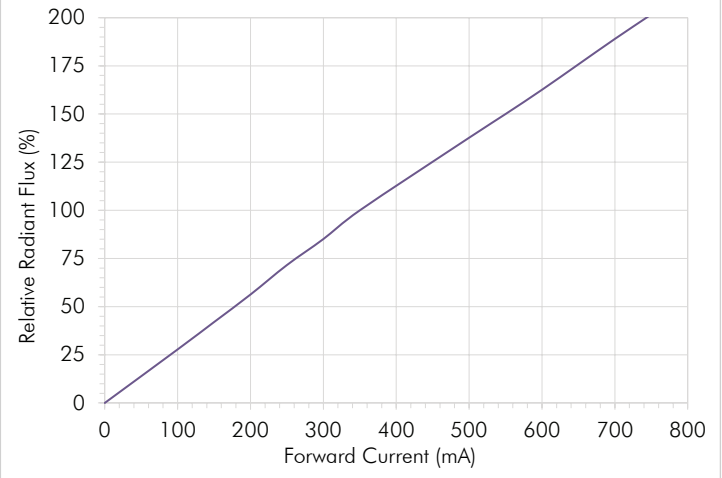


Forward Voltage vs. Forward Current

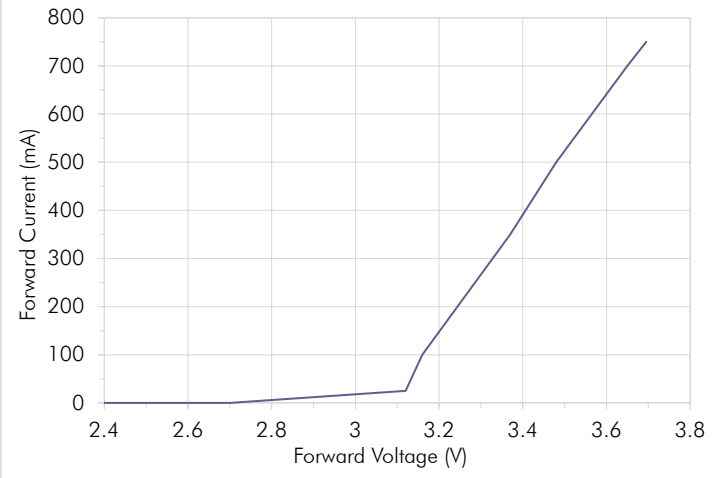



Mechanical Dimensions

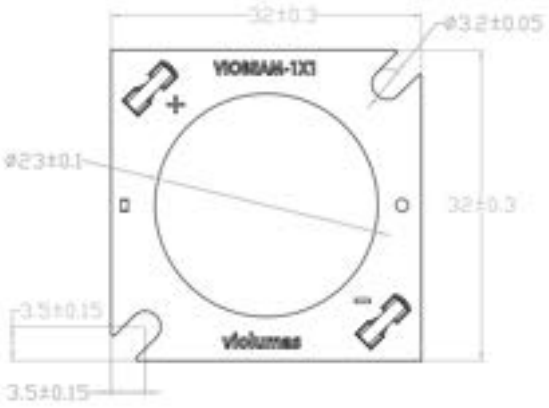

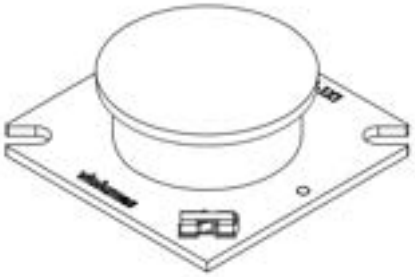

LED Circuit








Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

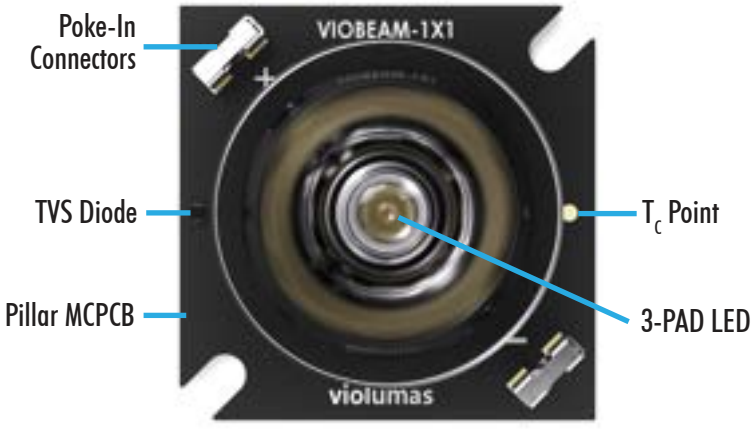

- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 700mA)


The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

Throw Distance: 10cm

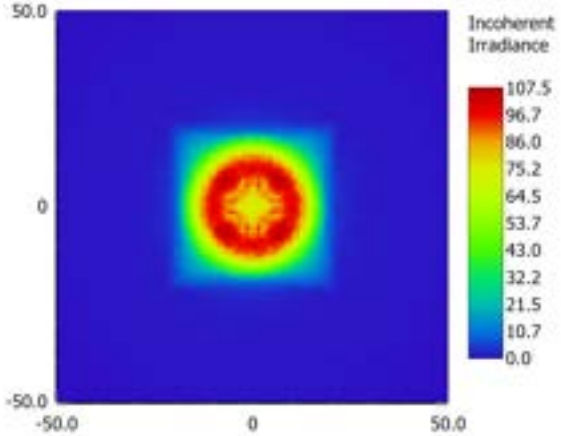

Peak Intensity: 107.5 mW/cm^2

Throw Distance: 10mm

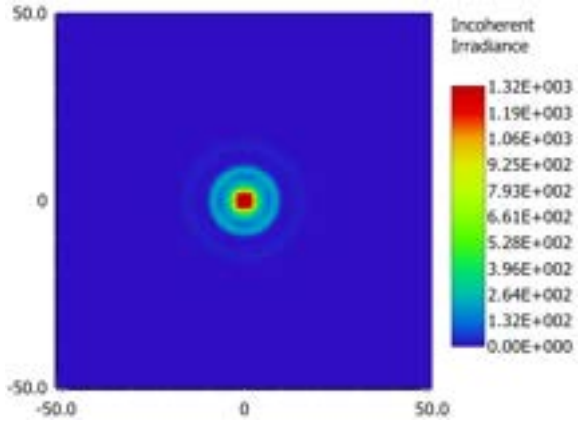

Peak Intensity: 1320 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-385 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A3W Driver Kit

Suitable for VioBeam-1X1-385



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 10/20/2025: Release of initial version

VioBeam-1X1-395 | Ultra Narrow Beam 395nm UV LED

The VioBeam-1X1-395 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 395±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 10.1mm
- Typical Peak Wavelength: 395nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F=700mA and T_A=25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	390	395	400
Forward Voltage	V_F	V	3.5	3.7	4.2
Radiant Flux	P_O	mW	950	1050	1200
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	12	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	115
Operating Temperature	T_{OPR}	°C	-30 ~ 80
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

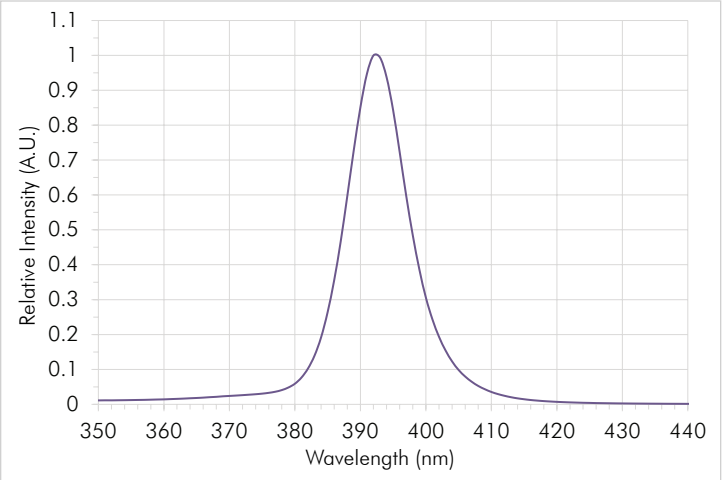


Radiation Pattern

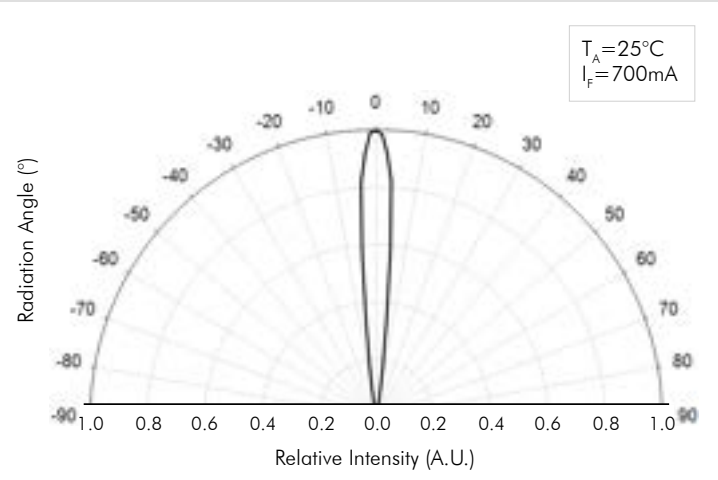


Forward Current vs. Relative Radiant Flux

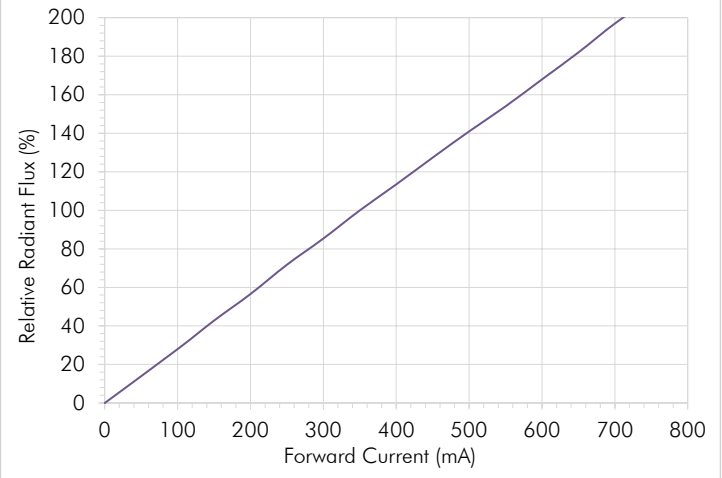


Forward Voltage vs. Forward Current

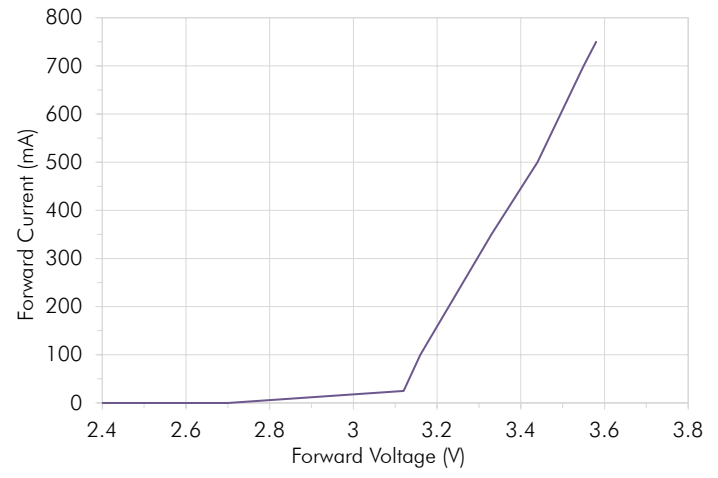



Mechanical Dimensions

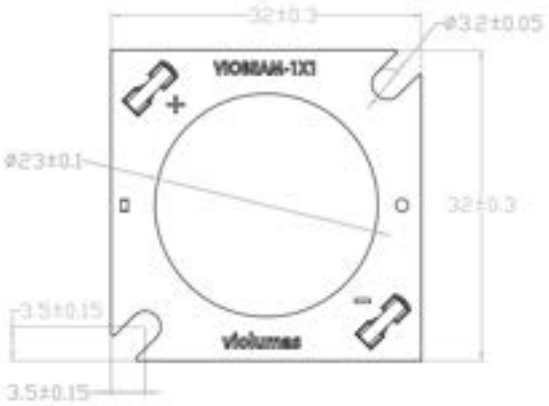

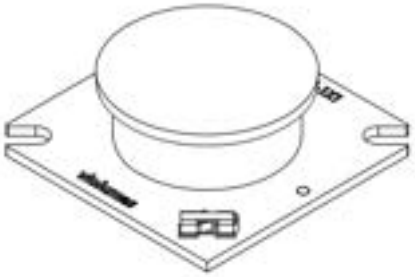

LED Circuit








Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

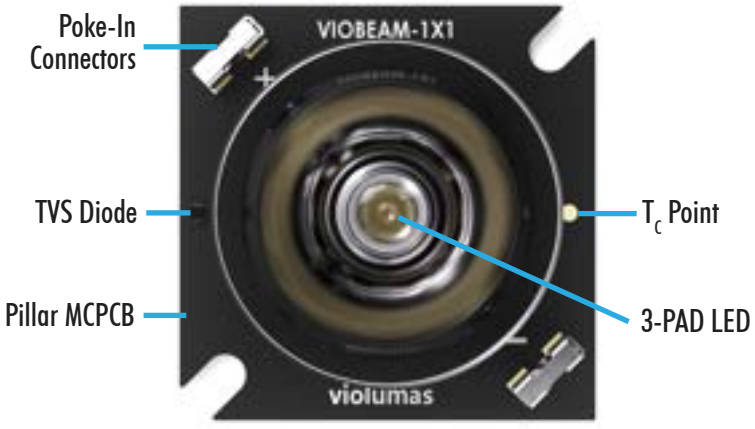

- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 700mA)


The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

Throw Distance: 10cm

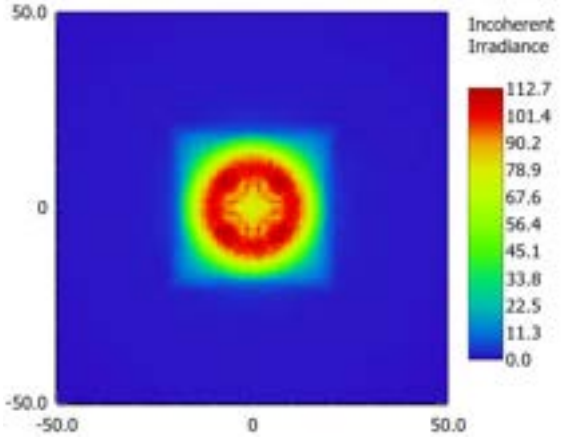

Peak Intensity: 112.7 mW/cm^2

Throw Distance: 10mm

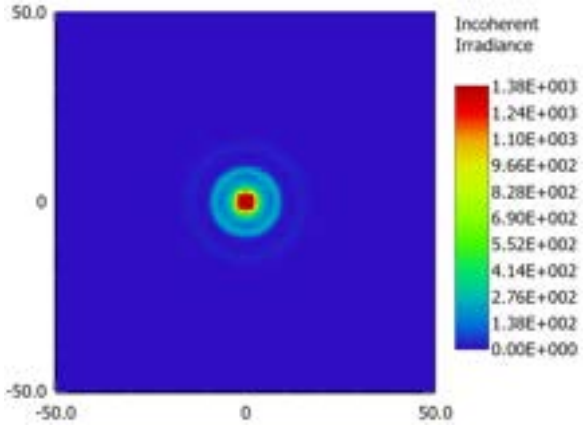

Peak Intensity: 1380 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-395 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A3W Driver Kit

Suitable for VioBeam-1X1-395



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 10/20/2025: Release of initial version

VioBeam-1X1-405 | Ultra Narrow Beam 405nm UV LED

The VioBeam-1X1-405 is an ultra narrow beam chip-on-board (COB) UV LED with a peak wavelength of 405±5nm. The COB has an integrated 10° TIR optic that delivers an exceptionally focused and narrow beam, achieving high intensities at longer throw distances. The VioBeam-1X1 series is designed for direct integration (solder-free) and is ideal for applications requiring high far-field intensity and/or focused spot illumination.



Features & Benefits

- Dimensions: 32mm x 32mm x 10.1mm
- Typical Peak Wavelength: 405nm
- Equipped with a 10° fused silica lens
- Ready for plug and play (solder-free) with poke-in connectors and TVS diode
- Integrated thermal technology in LED chip and MCPCB for lowest thermal resistance & reduced thermal decay
- Specialized for collimation, focused illumination, long distance, and fiber coupling applications:

- Disinfection	- Life Sciences
- Air Purification	- Curing
- Spectroscopy	- Sensing
- Fluorescence	- Research

Electro-Optical Characteristics at I_F=700mA and T_A=25°C

Parameter	Symbol	Unit	Min	Typical	Max
Peak Wavelength	λ_P	nm	400	405	410
Forward Voltage	V_F	V	3.5	3.7	4.2
Radiant Flux	P_O	mW	960	1050	1200
Full Width of Half Magnitude	$\Delta\lambda$	nm	-	12	-
Radiant Angle	$2\Phi_{1/2}$	Degree	-	10	-
Thermal Resistance, Junction to COB Bottom Surface	R_{th}(J-B)	°C/W	-	0.9	-


Peak Wavelength Tolerance: ±3nm; Forward Voltage Tolerance: 0.1V; Radiant Flux Tolerance: ±10%

Absolute Maximum Ratings


Parameter	Symbol	Unit	Value
Forward Current	I_F	mA	1000
Reverse Voltage	V_R	V	5
Power	P_D	W	6.5
Junction Temperature	T_J	°C	115
Operating Temperature	T_{OPR}	°C	-30 ~ 80
Storage Temperature	T_{STG}	°C	-40 ~ 100

Note: Operating the LED at or above the listed absolute maximum ratings may affect device reliability and result in permanent LED failure.


Spectral Output

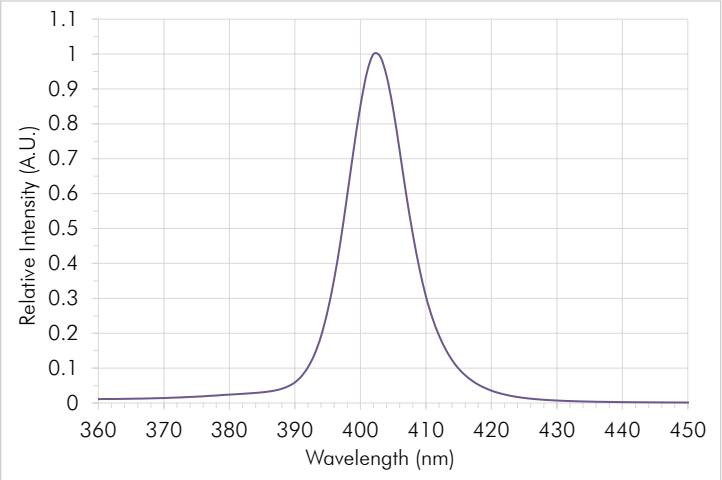


Radiation Pattern

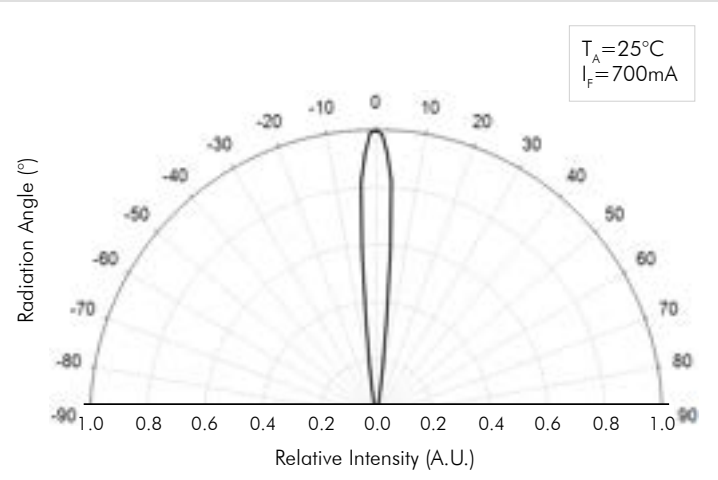


Forward Current vs. Relative Radiant Flux

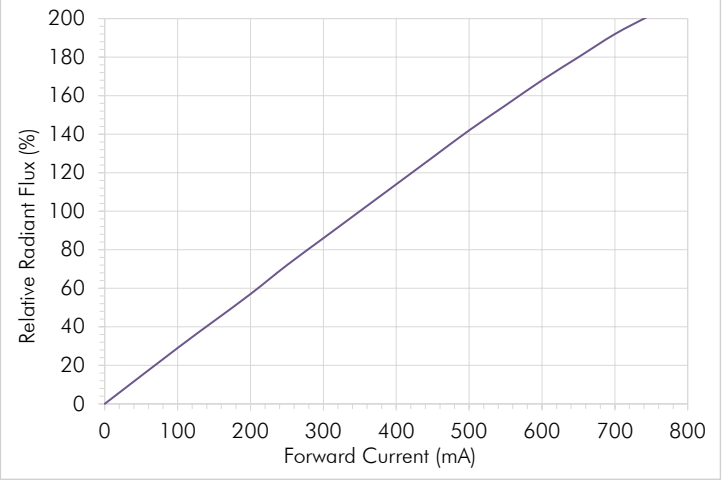


Forward Voltage vs. Forward Current

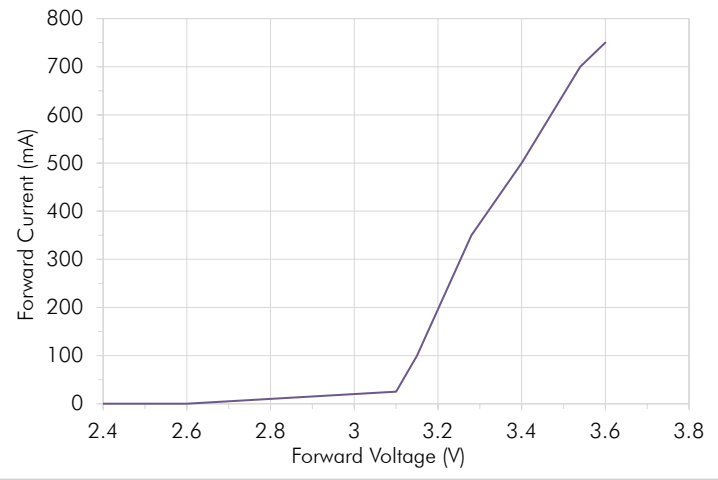



Mechanical Dimensions

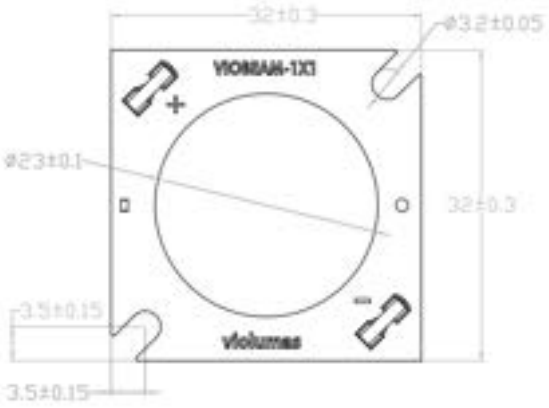

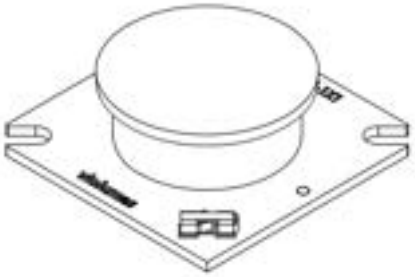

LED Circuit








Note: The maximum offset (tolerance) for lens alignment over the LED is 0.2mm.

Product Overview

COB LEDs are ready for plug and play with no soldering required. All Violumas COBs are equipped with connectors for direct wiring and a TVS diode for protection against ESD and voltage issues.

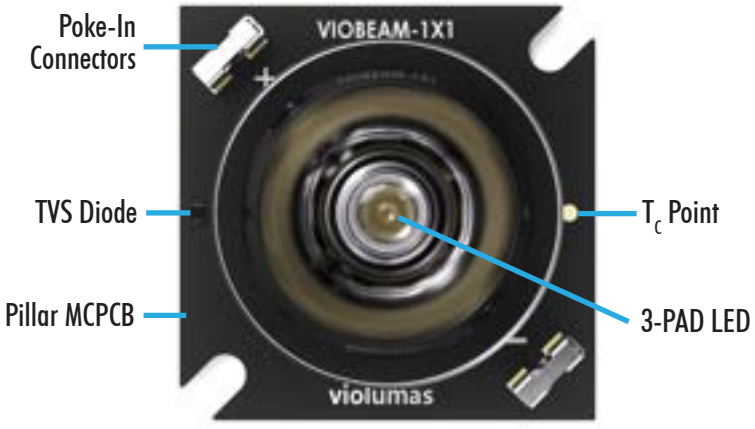

- Poke-in connectors for direct wiring (acceptable wire gauge: 20-24 AWG)
- Bi-directional TVS against 600W over-voltage surge




Note: Violumas COB products may be delivered with a protective tape on the backside of the LED. The tape should be removed before operation or assembly.

Irradiance Simulations (T_A = 25°C and I_F = 700mA)


The VioBeam-1X1 series is ideal for applications requiring highly focused spot illumination or high intensities at longer throw distances. Irradiance plots below are simulated at throw distances of 10 cm and 10 mm with detector area of 100 cm^2.

Throw Distance: 10cm

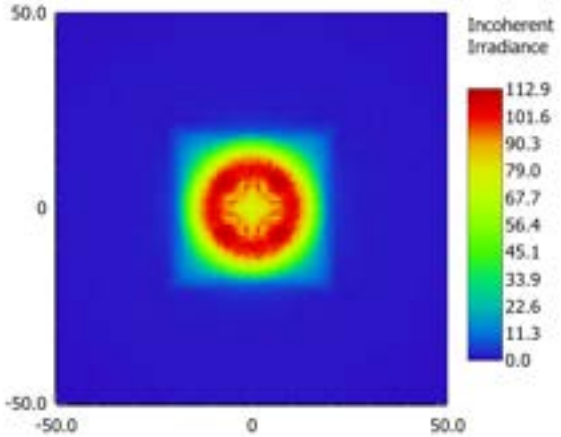

Peak Intensity: 112.9 mW/cm^2

Throw Distance: 10mm

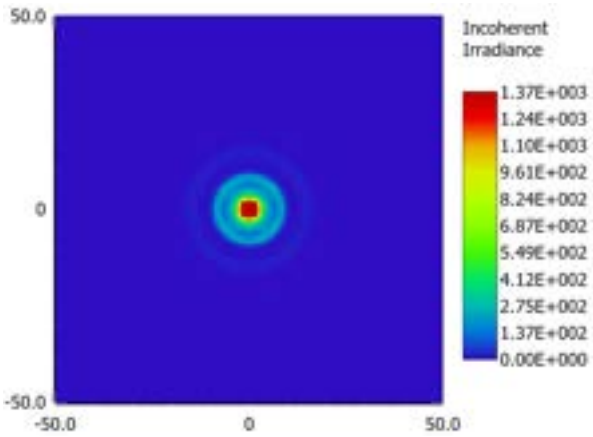

Peak Intensity: 1370 mW/cm^2

Heatsink and Driver Kit

The VioBeam-1X1-405 can be provided with a heatsink, mounting screws, and thermal pad for plug-and-play application and direct integration into systems. Driver kits are also available for testing purposes and are assembled with a power cord and plug for either 110VAC or 220VAC operation.

30.2.012424 Heatsink

Suitable for VioBeam-1X1 Series



PS-700A3W Driver Kit

Suitable for VioBeam-1X1-405



See heatsink and driver kit products at: https://violumas.com/heatsinks-drivers/

Handling & Usage Precautions

- Exhibit extreme care when handling LEDs. Do not touch the LED with bare hands as doing so may contaminate and affect the optical characteristics of the LED. When using tweezers, do not apply excessive force, especially to the glass lens. Do not drop the LED as doing so may cause product damage.
- Ensure that electrostatic discharge specifications are followed. Static electricity and surge voltages may cause product damage. Proper electrostatic discharge protection equipment, working machinery, and protected mounting equipment are recommended.
- Do not expose the LEDs to volatile organic compounds as well as hazardous, acidic, and corrosive substances during storage and operation to avoid product damage.
- Do not apply excess mechanical force and vibration while handling the product.
- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation.
- To avoid fault issues, do not couple any electrical wires to the metal substrate of the MCPCB or COB. If any electrical wires from the power source have contact with the MCPCB's metal base under power ON conditions, permanent damage may occur due to inner arcing within the LED structure.
- Avoid grounding of the LED copper substrate. Transient charges can propagate from the ground to the heatsink and finally to the copper substrate of the LED unit and damage the dielectric layer from ground charges. An insulator must be placed between the heatsink and the benchtop to avoid transient charge propagation from the ground.

Storage Precautions

- Do not expose the product to sudden changes in temperature, high humidity levels, and condensation. It is recommended to store all products in a controlled environment under 30°C free of dust.
- Please consult the Violumas engineering team for further information on storage precautions.

Eye Safety Precautions

- Avoid exposure to UV light during LED operation. Do not look directly into the UV light during LED operation. Do not look directly into the UV light during optical measurements even through optical instruments. Protect the body, skin, and eyes with UV protective equipment.
- Attach warning labels on all products and systems that use UV LEDs.

Cleaning Precautions

- Do not use brushes or organic solvents for cleaning the LEDs.
- Perform electrical and optical measurements before and after cleaning to ensure optimal performance.

Static Electricity Precautions

- Ensure that equipment and machinery are properly grounded.
- Anti-electrostatic attire (wristbands, gloves, footwear, etc.) is recommended.
- Damage inspection is recommended while performing characteristics inspection of LEDs.

Disclaimers

Violumas is not responsible for any damages that result from inaccurate use of the recommended guidelines. The information compiled in this document is a result of careful review of reference materials and reliable sources. Violumas does not make any claims regarding warranty or guarantee. It is recommended that each customer consults the Violumas engineering team before engaging Violumas products in extreme applications where the failure of the LED and damage to human health may be possible. Each user assumes full responsibility for determining the suitability of the use of Violumas products in various applications. Disassembling Violumas products without consent is prohibited. No part of these documents may be reproduced in any form without prior written permission from Violumas. Please note that the data presented in this document is measured from the use of exclusive Violumas patented products - the 3-PAD LED Flip Chip and the Pillar MCPCB.

Revision History

- 10/20/2025: Release of initial version