

UV - Photodetector with integrated amplifier

JIC 117
JIC 118
JIC 119



- characteristics :
- ◆ spectral range 210 to 390 nm
 - ◆ active area 0.055 mm²
 - ◆ responsivity, decade staged 1.2/12/120 mV/nW
 - ◆ extra sensor pin for external adjustment of gain and bandwidth
 - ◆ single supply voltage
 - ◆ sensor assembly isolated to ground
 - ◆ hermetically welded TO5-metal/glass package

- applications :
- ◆ selective UV-measurement
 - ◆ control of sterilization lamps
 - ◆ flame detection and flame control
 - ◆ control of irradiancy in varnish and adhesive hardening

absolute maximum ratings:

operating voltage	+5,5	V
operating temperature range	-25 °C ... +85	°C
storage temperature range	-40 °C ... +100	°C
soldering temperature (5s)	300	°C

technical data :

common test conditions, as not otherwise specified: T_A = 25 °C, V_S = +5 V
typ. values, maximum values in brackets

parameters	test conditions	JIC 117	JIC 118	JIC 119	unit
feedback resistor		10	100	1.000	MΩ
Dark offset voltage	E = 0 lx	± 1	± 2	± 3	mV
noise voltage	B = 1 kHz	1			mV _{rms}
max. of spectral responsivity	λ = 280 nm	1,2	12	120	mV/nW
risetime		20	100	700	μs
bandwidth	- 3 dB	15	3	0.5	kHz
saturation voltage	R _L = 2 kΩ	+ 4.95 (+ 4.8)			V
shortcurrent		± 50			mA
Operating voltage		+ 2.7 to + 5			V
current consumption		750 (1100)			μA


rev. 09/2002

D
A
T
A

S
H
E
E
T


JIC 117, 118, 119

relative spectral responsivity

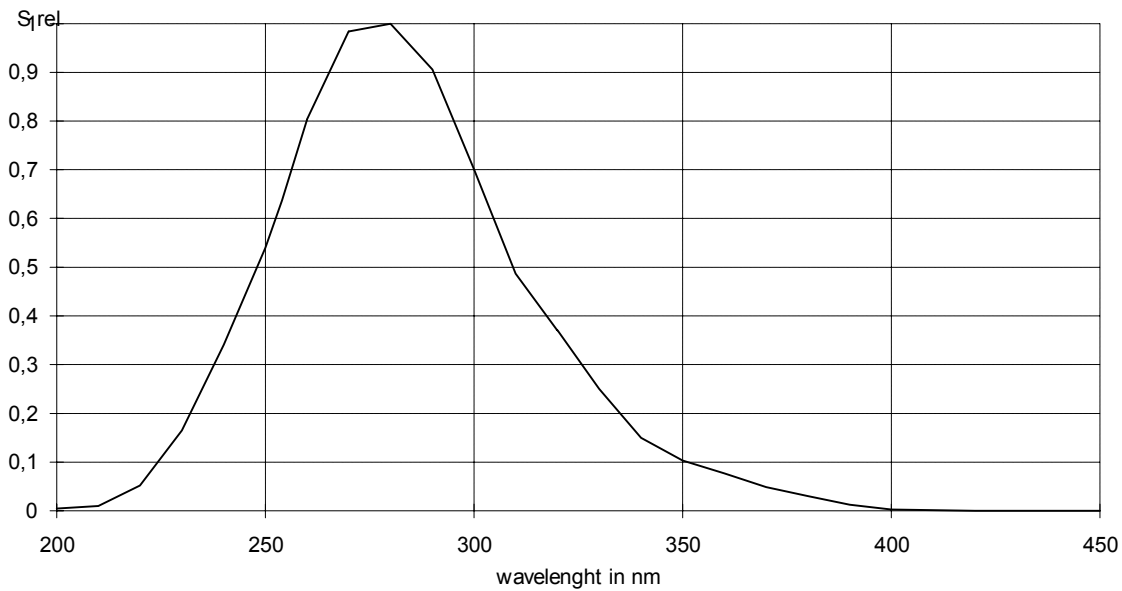


pin configuration

- 1 R_f
- 2 Out
- 3 V_s
- 4 GND
- 5 Case

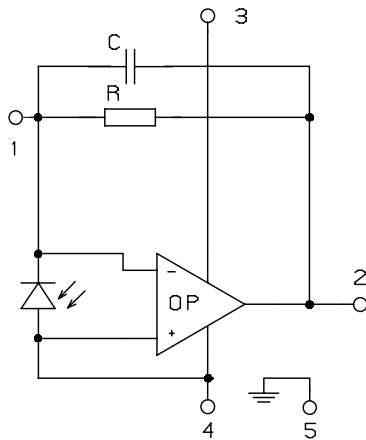

package dimensions

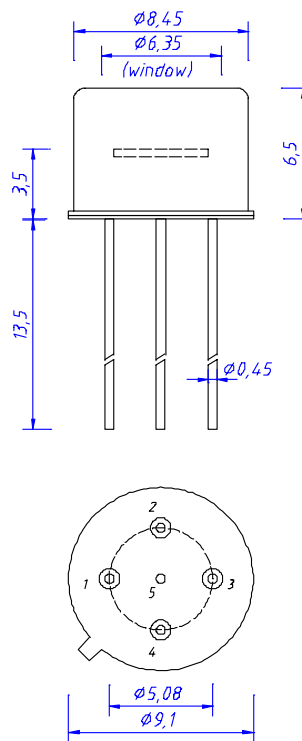

application hints:

- If an external resistor is used for reduction of gain, please make sure that length of connections is as short as possible to reduce noise and capacitive interference.
- If internally adjusted gain is used only, please cut pin 1.