Broadband Si based UV photodetector with integrated amplifier



1/4

### **GENERAL FEATURES**



- Broadband Si based UV photodetector in TO5 housing with attenuator
- o... 5 V voltage output
- peak wavelength at 626 nm
- max. radiation (saturation limit) at peak is 18 W/cm<sup>2</sup>, minimum radiation (resolution limit) is 1,8 mW/cm<sup>2</sup>
- Applications: UV hardening control and other very high UV radiation sources

#### What is a TOCON?

A TOCON is a 5 Volt powered photodetector with integrated amplifier converting visible light radiation into a 0...5V voltage output. The V<sub>out</sub> pin of the TOCON can be directly connected to a controller, a voltmeter or any other data analyzing device with voltage input. Highly modern electronic components and a hermetically sealed metal housing with glass window eliminates noise caused by parasitic resistance paths inside the package or EMI. A TOCON is a perfect solution for each industrial light sensing application starting from stray light detection at pW/cm<sup>2</sup> level up to sun light measurements at W/cm<sup>2</sup> level. This thirteen orders of magnitude range is covered by ten different TOCONs that differ by their sensitivity. The TOCONs are produced as broadband sensors or with filters for selective measurement.

### NOMENCLATURE

TOCON_	ABC, A, B, C, blue, GaP or Si	1 10
	Spectral response	Irradiance limits (Vsupply=5V, $\lambda = \lambda_{peak}$ )
	<b>ABC = broadband</b> $\lambda_{max} = 290 \text{ nm}  \lambda_{S10\%} = 227 \text{ nm} \dots 360 \text{ nm}$	$1 = 1.8 \text{ pW/cm}^2 \dots 18 \text{ nW/cm}^2$
	<b>A = UVA</b> $λ_{max} = 331 \text{ nm}$ $λ_{S10\%} = 309 \text{ nm} 367 \text{ nm}$	2 = 18 pW/cm <sup>2</sup> 180 nW/cm <sup>2</sup> 3 = 180 pW/cm <sup>2</sup> 1,8 μW/cm <sup>2</sup>
	<b>B</b> = UVB $λ_{max} = 280 \text{ nm}  λ_{S10\%} = 243 \text{ nm} \dots 303 \text{ nm}$	$4 = 1.8 \text{ nW/cm}^2 \dots 18 \mu \text{W/cm}^2$
	<b>C = UVC</b> $λ_{max} = 275 \text{ nm}  λ_{S10\%} = 225 \text{ nm} \dots 287 \text{ nm}$	<b>5</b> = 18 nW/cm <sup>2</sup> 180 μW/cm <sup>2</sup> <b>6</b> = 180 nW/cm <sup>2</sup> 1,8 mW/cm <sup>2</sup>
	Blue = blue light $\lambda_{max} = 445 \text{ nm}  \lambda_{S10\%} = 390 \text{ nm} \dots 515 \text{ nm}$	$7 = 1.8 \mu\text{W/cm}^2 \dots 18 \text{mW/cm}^2$
	$GaP = UV + VIS$ $\lambda_{max} = 445 \text{ nm}  \lambda_{S10\%} = 190 \text{ nm} \dots 570 \text{ nm}$	<ul> <li>8 = 18 μW/cm<sup>2</sup> 180 mW/cm<sup>2</sup></li> <li>9 = 180 μW/cm<sup>2</sup> 1,8 W/cm<sup>2</sup></li> </ul>
	<b>Si = VIS</b> $\lambda_{max} = 626 \text{ nm}  \lambda_{S10\%} = 290 \text{ nm} \dots 1010 \text{ nm}$	$10 = 1.8 \text{ mW/cm}^2 \dots 18 \text{ W/cm}^2$
	<b>E = UV-Index</b> spectral response according to CIEo87	<b>2</b> = 0 UVI 30 UVI

**sg**Lux GmbH | Richard-Willstätter-Str. 8 | D–12489 Berlin | Tel. +49 30 5301 5211 | welcome@sglux.de | www.sglux.de Rev. 1.1 Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.



Broadband Si based UV photodetector with integrated amplifier




2/4

## SPECIFICATIONS

Parameter	Symbol	Value	Unit
Spectral Characteristics			
Typical Responsivity at Peak Wavelength	S <sub>max</sub>	2,8E-01	V/W/cm <sup>2</sup>
Wavelength of max. Spectral Responsivity	$\lambda_{max}$	626	nm
Responsivity Range (S=0,1*S <sub>max</sub> )	-	290 1010	nm
General Characteristics (T=25°C, V <sub>supply</sub> =+5 V)			
Supply Voltage	Vs	2,5 5	V
Saturation Voltage	V <sub>Sat</sub>	Vs - 5%	V
Dark Offset Voltage	V <sub>Offset</sub>	50	μV
Temperature Coefficient at Peak	Tc	< -0,3	%/K
Current Consumption	I	150	μA
Bandwidth (-3 dB)	В	15	Hz
Risetime (10-90%)	t <sub>rise</sub>	0,069	5
Maximum Ratings			
Operating Temperature	T <sub>opt</sub>	-25 +85	°C
Storage Temperature	T <sub>stor</sub>	-40 +100	°C
Soldering Temperature (3s)	T <sub>sold</sub>	300	°C




## NORMALIZED SPECTRAL RESPONSIVITY

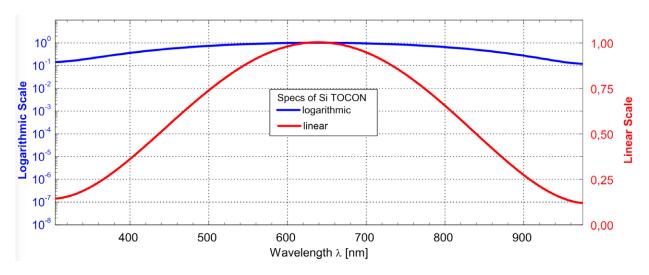



Broadband Si based UV photodetector with integrated amplifier

## FIELD OF VIEW

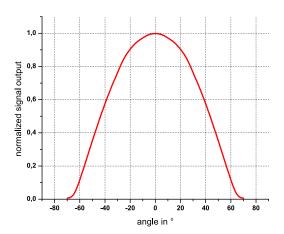




3/4

Measurement Setup:

lamp aperture diameter: 10 mm distance lamp aperture to second aperture: 17 mm second aperture diameter: 10 mm distance second aperture to detector: 93 mm

pivot level = top surface of the detector window

### DRAWING

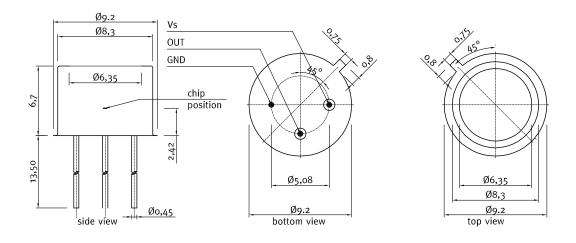



### Broadband Si based UV photodetector with integrated amplifier



4/4

## APPLICATION NOTE FOR TOCONS

The TOCONs need a supply voltage of  $V_{supply}=2,5...5V_{DC}$  and can be directly connected to a controller or voltmeter. Please note that the theoretic maximum signal output is always a little less (approx. 5%) than the supply voltage. To learn more about perfect use of the TOCONs please refer to the TOCON FAQ list published at www.sglux.com.

#### **CAUTION!** Wrong wiring leads to destruction of the device.

For easy setup of the device please ask for a TOCON starter kit.

#### Miniature steel housing with M12x1 thread for the TOCON series



- Optional feature for all TOCON detectors
- Robust stainless steel M12x1 thread body, length 32 mm
- Integrated sensor connector (Binder 4-Pin plug) with 2m connector cable
- Easy to mount and to connect



#### Miniature PTFE housing with M12x1 thread for the TOCON series

- Optional feature for all TOCON detectors without concentrator lens
- Teflon (PTFE) M12x1 thread body, length 31 mm
- Wide field of view, dirt-repellant, water proof at wet side (IP 68)
- Integrated sensor connector (Binder 4-Pin plug) with 2m connector cable
- Easy to mount and connect, cleanable

 $\label{eq:theory} The {\tt PTFE} housing reduces the signal output by {\tt approx.95\%}. Please consider this while selecting the {\tt TOCON'} ssensitivity range.$ 



#### **Plastic probes**

- Optional feature for all TOCON detectors
- probes in small plastic housings with a TOCON inside
- Customized housings available
- Easy to mount and to connect
- Integrated sensor connector (Binder 4-Pin plug)
- Cable available



#### Water pressure proof TOCON housing

- Optional feature for all TOCON detectors without concentrator lens
- G1/4" thread, 10 bar water pressure proof
- Customized housings available
- Easy to mount and to connect
- Integrated sensor connector (Binder 5-Pin plug)
- Cable available

