



PCI-2TE-13

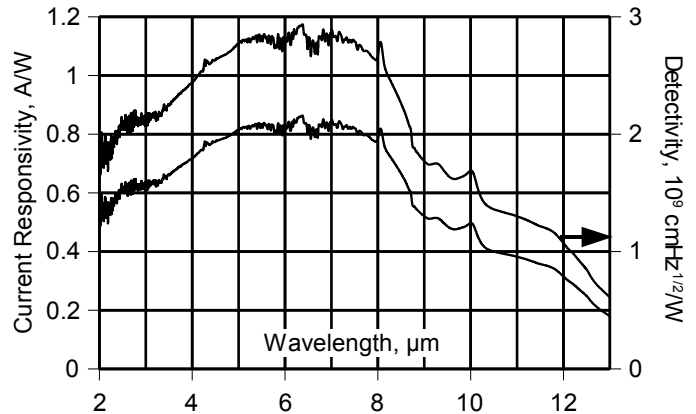

FTIR DEDICATED 2-13 μm IR PHOTOCONDUCTOR THERMOELECTRICALLY COOLED OPTICALLY IMMERSED

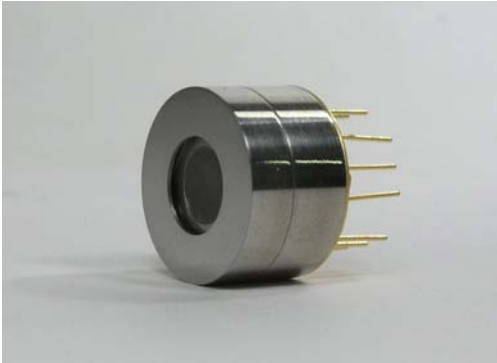

DESCRIPTION

PCI-2TE-13 is a wide spectral band FTIR dedicated photodetector. The device operates within the 1-13 μm range, with performance boosted at short wavelength. The responsivity is stabilized with built-in two-stage Peltier cooler, keeping sensitive element at temperature 220-240 K. Performance of the devices has been improved with heterostructure design, optical resonance and hyperhemispherical immersion. Constant voltage bias and current readout should be used for the best performance and linearity.

The spectral response can be tuned according to requirements; better performance can be achieved for short cutoff wavelength devices. Standard detectors are available in modified TO-8 packages with BaF₂ windows. Other packages, windows and connectors are available upon request.

SPECIFICATION*

@ 20°C

Wavelength,	μm	2	4	6	8	10	12
Detectivity,	cmHz ^{1/2} /W	1.8×10 ⁹	2.4×10 ⁹	2.9×10 ⁹	2.6×10 ⁹	1.6×10 ⁹	1×10 ⁹
Current responsivity,	A/W	0.5	0.7	0.8	0.8	0.45	0.3

*detector size 1x1mm²

Other parameters: response time <10 ns, 1/f noise knee frequency <10 kHz, active area 0.25×0.25; 0.5×0.5; 1×1; 2×2 mm, bias field 5-10 V/cm, sheet resistivity 50-100 ohm, acceptance angle 35 deg, minimum f/# 1.6

ACCESSORIES



Stand Alone
Pre-amplifier/Supply



Integrated Pre-amplifier/Supply/Peltier
Controller



Thermoelectric Cooler Controller



HEADQUARTERS
3 Swietlikow Str.
01-389 Warsaw
POLAND

tel.: +48 22 666 01 45
fax: +48 22 666 01 59
<http://www.vigo.com.pl>

SALES OFFICE
11a Wyki Str.
01-318 Warsaw
POLAND

tel.: +48 22 666 14 10
fax: +48 22 665 21 55
e-mail: info@vigo.com.pl

